

Ex系列-防爆尼龙防水接头/黑色

Explosion proof Nylon cable gland/Black

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF牙)，NPT牙

产品颜色：黑色（RAL9005）

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

应用场景：防爆电气,船舶,电机,照明,机械,轨道交通

订购说明：默认配O型圈，但不附螺母，，如需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, in compliance with GB/T196-1981 standard

Product color: Black (RAL9005)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed

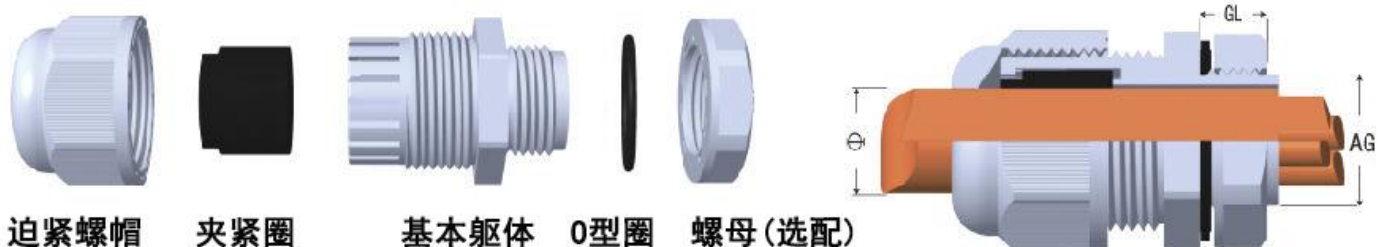

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-M12-06B	M12×1.5	12	3~6.5	8	15	50
EX-M12L-06B	M12×1.5	12	3~6.5	15	15	50
EX-M12-08B	M12×1.5	12	4~8	8	15	50
EX-M16-08B	M16×1.5	16	4~8	8	19	50
EX-M16-10B	M16×1.5	16	5~10	8	22	50
EX-M16L-08B	M16×1.5	16	4~8	15	19	50
EX-M18-10B	M18×1.5	18	5~10	8	22	50
EX-M18L-10B	M18×1.5	18	5~10	15	22	50
EX-M20-08B	M20×1.5	20	4~8	9	24	50
EX-M20-10B	M20×1.5	20	5~10	9	24	50
EX-M20-12B	M20×1.5	20	6~12	9	24	50
EX-M20L-12B	M20×1.5	20	6~12	15	24	50
EX-M20-14B	M20×1.5	20	8~14	9	27	50
EX-M20L-14B	M20×1.5	20	8~14	15	27	50
EX-M22-14B	M22×1.5	22	8~14	10	27	50
EX-M22L-14B	M22×1.5	22	8~14	15	27	50
EX-M24-14B	M24×1.5	24	8~14	10	27	50
EX-M25-18B	M25×1.5	25	13~18	11	33	50
EX-M25L-18B	M25×1.5	25	13~18	15	33	50
EX-M27-18B	M27×2.0	27	13~18	11	33	50
EX-M27L-18B	M27×2.0	27	13~18	15	33	50
EX-M30-18B	M30×2.0	30	13~18	11	33	50
EX-M32-25B	M32×1.5	32	18~25	11	42	20
EX-M32L-25B	M32×1.5	32	18~25	15	42	20
EX-M33-25B	M33×2.0	33	18~25	11	42	20
EX-M36-25B	M36×2.0	36	18~25	11	42	20
EX-M36L-25B	M36×2.0	36	18~25	15	42	20
EX-M40-32B	M40×1.5	40	22~32	13	52	10
EX-M40L-32B	M40×1.5	40	22~32	15	52	10
EX-M42-32B	M42×2.0	42	22~32	13	52	10
EX-M45-32B	M45×2.0	45	22~32	13	52	10
EX-M48-32B	M48×2.0	48	22~32	13	52	10
EX-M50-38B	M50×1.5	50	32~38	14	60	10
EX-M56-38B	M56×2.0	56	32~38	14	60	10
EX-M60-44B	M60×2.0	60	37~44	15	65	5
EX-M63-44B	M63×1.5	63	37~44	15	65	5
EX-M64-44B	M64×2.0	64	37~44	15	65	5

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-PG7-06B	PG7	12.5	3~6.5	8	15	50
EX-PG9-08B	PG9	15.2	4~8	8	19	50
EX-PG9L-08B	PG9	15.2	4~8	15	19	50
EX-PG11-10B	PG11	18.6	5~10	8	22	50
EX-PG11L-10B	PG11	18.6	5~10	15	22	50
EX-PG13.5-10B	PG13.5	20.4	5~10	9	24	50
EX-PG13.5-12B	PG13.5	20.4	6~12	9	24	50
EX-PG13.5L-12B	PG13.5	20.4	6~12	15	24	50
EX-PG16-14B	PG16	22.5	8~14	9	27	50
EX-PG16L-14B	PG16	22.5	8~14	15	27	50
EX-PG21-18B	PG21	28.3	13~18	11	33	50
EX-PG21L-18B	PG21	28.3	13~18	15	33	50
EX-PG29-25B	PG29	37	18~25	11	42	20
EX-PG29L-25B	PG29	37	18~25	15	42	20
EX-PG36-32B	PG36	47	22~32	13	52	10
EX-PG42-38B	PG42	54	32~38	14	60	10
EX-PG48-44B	PG48	59.3	37~44	15	65	5
EX-NPT3/8-10B	NPT3/8	16.66	5~10	11	22	50
EX-NPT1/2-12B	NPT1/2	20.99	6~12	13	24	50
EX-NPT3/4-18B	NPT3/4	26.44	13~18	13	33	50
EX-NPT1-25B	NPT1	33.24	18~25	16	42	20
EX-NPT1-1/4-32B	NPT1-1/4	41.91	22~32	16	52	10
EX-NPT1-1/4-38B	NPT1-1/4	41.91	32~38	16	60	10
EX-NPT1-1/2-38B	NPT1-1/2	47.8	32~38	16	60	10
EX-NPT2-44B	NPT2	59.61	37~44	16	65	5
EX-G1/2-12B	G1/2	20.99	6~12	13	24	50
EX-G3/4-18B	G3/4	26.44	13~18	13	33	50
EX-G1-25B	G1	33.24	18~25	16	42	20
EX-G2-44B	G2	59.61	37~44	16	65	5

Ex系列-防爆尼龙防水接头/蓝色

Explosion proof Nylon cable gland/Blue

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF牙)，NPT牙

产品颜色：蓝色

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

应用场景：防爆电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配O型圈，但不附螺母，如需请说明，部分型号无现货，交期请咨询我们的客户经理

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, in compliance with GB/T196-1981 standard

Product color: default blue (RAL)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed, Some models are out of stock, please consult our customer manager for delivery time

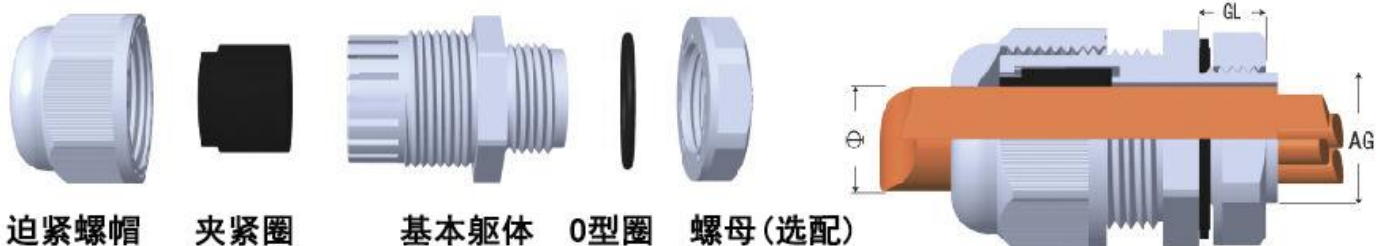

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-M12-06N	M12×1.5	12	3~6.5	8	15	50
EX-M12L-06N	M12×1.5	12	3~6.5	15	15	50
EX-M12-08N	M12×1.5	12	4~8	8	15	50
EX-M16-08N	M16×1.5	16	4~8	8	19	50
EX-M16-10N	M16×1.5	16	5~10	8	22	50
EX-M16L-08N	M16×1.5	16	4~8	15	19	50
EX-M18-10N	M18×1.5	18	5~10	8	22	50
EX-M18L-10N	M18×1.5	18	5~10	15	22	50
EX-M20-08N	M20×1.5	20	4~8	9	24	50
EX-M20-10N	M20×1.5	20	5~10	9	24	50
EX-M20-12N	M20×1.5	20	6~12	9	24	50
EX-M20L-12N	M20×1.5	20	6~12	15	24	50
EX-M20-14N	M20×1.5	20	8~14	9	27	50
EX-M20L-14N	M20×1.5	20	8~14	15	27	50
EX-M22-14N	M22×1.5	22	8~14	10	27	50
EX-M22L-14N	M22×1.5	22	8~14	15	27	50
EX-M24-14N	M24×1.5	24	8~14	10	27	50
EX-M25-18N	M25×1.5	25	13~18	11	33	50
EX-M25L-18N	M25×1.5	25	13~18	15	33	50
EX-M27-18N	M27×2.0	27	13~18	11	33	50
EX-M27L-18N	M27×2.0	27	13~18	15	33	50
EX-M30-18N	M30×2.0	30	13~18	11	33	50
EX-M32-25N	M32×1.5	32	18~25	11	42	20
EX-M32L-25N	M32×1.5	32	18~25	15	42	20
EX-M33-25N	M33×2.0	33	18~25	11	42	20
EX-M36-25N	M36×2.0	36	18~25	11	42	20
EX-M36L-25N	M36×2.0	36	18~25	15	42	20
EX-M40-32N	M40×1.5	40	22~32	13	52	10
EX-M40L-32N	M40×1.5	40	22~32	15	52	10
EX-M42-32N	M42×2.0	42	22~32	13	52	10
EX-M45-32N	M45×2.0	45	22~32	13	52	10
EX-M48-32N	M48×2.0	48	22~32	13	52	10
EX-M50-38N	M50×1.5	50	32~38	14	60	10
EX-M56-38N	M56×2.0	56	32~38	14	60	10
EX-M60-44N	M60×2.0	60	37~44	15	65	5
EX-M63-44N	M63×1.5	63	37~44	15	65	5
EX-M64-44N	M64×2.0	64	37~44	15	65	5

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-PG7-06N	PG7	12.5	3~6.5	8	15	50
EX-PG9-08N	PG9	15.2	4~8	8	19	50
EX-PG9L-08N	PG9	15.2	4~8	15	19	50
EX-PG11-10N	PG11	18.6	5~10	8	22	50
EX-PG11L-10N	PG11	18.6	5~10	15	22	50
EX-PG13.5-10N	PG13.5	20.4	5~10	9	24	50
EX-PG13.5-12N	PG13.5	20.4	6~12	9	24	50
EX-PG13.5L-12N	PG13.5	20.4	6~12	15	24	50
EX-PG16-14N	PG16	22.5	8~14	9	27	50
EX-PG16L-14N	PG16	22.5	8~14	15	27	50
EX-PG21-18N	PG21	28.3	13~18	11	33	50
EX-PG21L-18N	PG21	28.3	13~18	15	33	50
EX-PG29-25N	PG29	37	18~25	11	42	20
EX-PG29L-25N	PG29	37	18~25	15	42	20
EX-PG36-32N	PG36	47	22~32	13	52	10
EX-PG42-38N	PG42	54	32~38	14	60	10
EX-PG48-44N	PG48	59.3	37~44	15	65	5
EX-NPT3/8-10N	NPT3/8	16.66	5~10	11	22	50
EX-NPT1/2-12N	NPT1/2	20.99	6~12	13	24	50
EX-NPT3/4-18N	NPT3/4	26.44	13~18	13	33	50
EX-NPT1-25N	NPT1	33.24	18~25	16	42	20
EX-NPT1-1/4-32N	NPT1-1/4	41.91	22~32	16	52	10
EX-NPT1-1/4-38N	NPT1-1/4	41.91	32~38	16	60	10
EX-NPT1-1/2-38N	NPT1-1/2	47.8	32~38	16	60	10
EX-NPT2-44N	NPT2	59.61	37~44	16	65	5
EX-G1/2-12N	G1/2	20.99	6~12	13	24	50
EX-G3/4-18N	G3/4	26.44	13~18	13	33	50
EX-G1-25N	G1	33.24	18~25	16	42	20
EX-G2-44N	G2	59.61	37~44	16	65	5

Ex系列-防爆尼龙防水接头/浅灰色

Explosion proof Nylon cable gland/light gray

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF牙)，NPT牙

产品颜色：浅灰色

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

应用场景：防爆电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配O型圈，但不附螺母，如需请说明，部分型号无现货，交期请咨询我们的客户经理

LAND 蓝江



Product Material: Nylon PA6

Thread specification: M/PG/G/NPT

Product color: light grey

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed, Some models are out of stock, please consult our customer manager for delivery time



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-M12-06G	M12×1.5	12	3~6.5	8	15	50
EX-M12L-06G	M12×1.5	12	3~6.5	15	15	50
EX-M12-08G	M12×1.5	12	4~8	8	15	50
EX-M16-08G	M16×1.5	16	4~8	8	19	50
EX-M16-10G	M16×1.5	16	5~10	8	22	50
EX-M16L-08G	M16×1.5	16	4~8	15	19	50
EX-M18-10G	M18×1.5	18	5~10	8	22	50
EX-M18L-10G	M18×1.5	18	5~10	15	22	50
EX-M20-08G	M20×1.5	20	4~8	9	24	50
EX-M20-10G	M20×1.5	20	5~10	9	24	50
EX-M20-12G	M20×1.5	20	6~12	9	24	50
EX-M20L-12G	M20×1.5	20	6~12	15	24	50
EX-M20-14G	M20×1.5	20	8~14	9	27	50
EX-M20L-14G	M20×1.5	20	8~14	15	27	50
EX-M22-14G	M22×1.5	22	8~14	10	27	50
EX-M22L-14G	M22×1.5	22	8~14	15	27	50
EX-M24-14G	M24×1.5	24	8~14	10	27	50
EX-M25-18G	M25×1.5	25	13~18	11	33	50
EX-M25L-18G	M25×1.5	25	13~18	15	33	50
EX-M27-18G	M27×2.0	27	13~18	11	33	50
EX-M27L-18G	M27×2.0	27	13~18	15	33	50
EX-M30-18G	M30×2.0	30	13~18	11	33	50
EX-M32-25G	M32×1.5	32	18~25	11	42	20
EX-M32L-25G	M32×1.5	32	18~25	15	42	20
EX-M33-25G	M33×2.0	33	18~25	11	42	20
EX-M36-25G	M36×2.0	36	18~25	11	42	20
EX-M36L-25G	M36×2.0	36	18~25	15	42	20
EX-M40-32G	M40×1.5	40	22~32	13	52	10
EX-M40L-32G	M40×1.5	40	22~32	15	52	10
EX-M42-32G	M42×2.0	42	22~32	13	52	10
EX-M45-32G	M45×2.0	45	22~32	13	52	10
EX-M48-32G	M48×2.0	48	22~32	13	52	10
EX-M50-38G	M50×1.5	50	32~38	14	60	10
EX-M56-38G	M56×2.0	56	32~38	14	60	10
EX-M60-44G	M60×2.0	60	37~44	15	65	5
EX-M63-44G	M63×1.5	63	37~44	15	65	5
EX-M64-44G	M64×2.0	64	37~44	15	65	5

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-PG7-06N	PG7	12.5	3~6.5	8	15	50
EX-PG9-08N	PG9	15.2	4~8	8	19	50
EX-PG9L-08N	PG9	15.2	4~8	15	19	50
EX-PG11-10N	PG11	18.6	5~10	8	22	50
EX-PG11L-10N	PG11	18.6	5~10	15	22	50
EX-PG13.5-10N	PG13.5	20.4	5~10	9	24	50
EX-PG13.5-12N	PG13.5	20.4	6~12	9	24	50
EX-PG13.5L-12N	PG13.5	20.4	6~12	15	24	50
EX-PG16-14N	PG16	22.5	8~14	9	27	50
EX-PG16L-14N	PG16	22.5	8~14	15	27	50
EX-PG21-18N	PG21	28.3	13~18	11	33	50
EX-PG21L-18N	PG21	28.3	13~18	15	33	50
EX-PG29-25N	PG29	37	18~25	11	42	20
EX-PG29L-25N	PG29	37	18~25	15	42	20
EX-PG36-32N	PG36	47	22~32	13	52	10
EX-PG42-38N	PG42	54	32~38	14	60	10
EX-PG48-44N	PG48	59.3	37~44	15	65	5
EX-NPT3/8-10N	NPT3/8	16.66	5~10	11	22	50
EX-NPT1/2-12N	NPT1/2	20.99	6~12	13	24	50
EX-NPT3/4-18N	NPT3/4	26.44	13~18	13	33	50
EX-NPT1-25N	NPT1	33.24	18~25	16	42	20
EX-NPT1-1/4-32N	NPT1-1/4	41.91	22~32	16	52	10
EX-NPT1-1/4-38N	NPT1-1/4	41.91	32~38	16	60	10
EX-NPT1-1/2-38N	NPT1-1/2	47.8	32~38	16	60	10
EX-NPT2-44N	NPT2	59.61	37~44	16	65	5
EX-G1/2-12N	G1/2	20.99	6~12	13	24	50
EX-G3/4-18N	G3/4	26.44	13~18	13	33	50
EX-G1-25N	G1	33.24	18~25	16	42	20
EX-G2-44N	G2	59.61	37~44	16	65	5

B型连体-尼龙电缆防水接头/M

B-type Nylon cable waterproof gland/M

产品材料：尼龙PA6

螺纹规格：公制M牙，符合GB/T196-1981标准

产品颜色：黑色（RAL9005），灰白色(RAL7035)


产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：密封件连体式设计，防水密封性好，抗拉力强

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

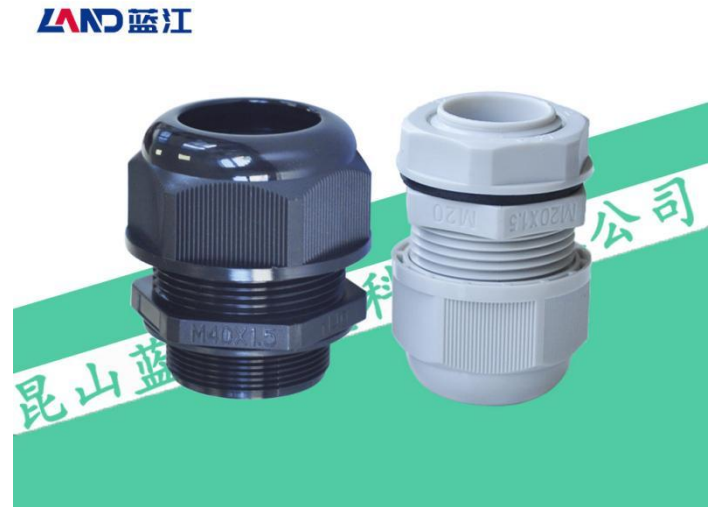

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

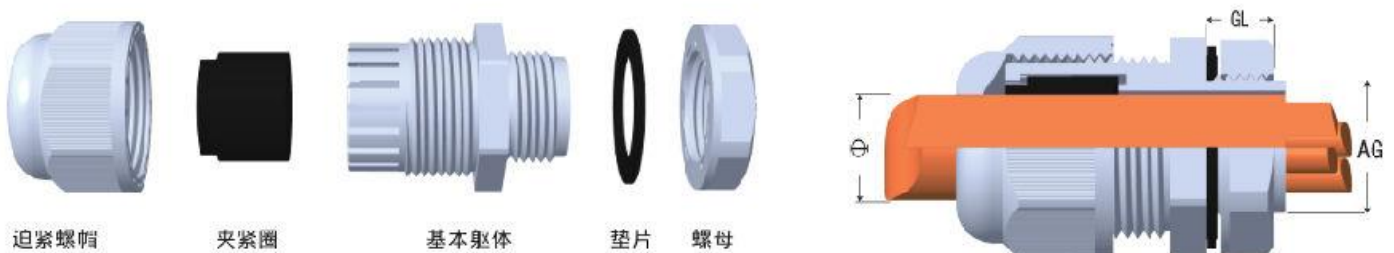

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG8B-04	M8×1.25	8	2~4.5	7.5	13/12	50
MG8B-02	M8×1.25	8	1~2	7.5	13/12	50
MG10B-06	M10×1.5	10	3~6	8	15/12	50
MG10B-03	M10×1.5	10	1.5~3	8	15/12	50
MG12B-08	M12×1.5	12	4~8	8.5	18/19	50
MG12B-05	M12×1.5	12	3~5	8.5	18/19	50
MG12B-03	M12×1.5	12	1.5~3	8.5	18/19	50
MG12BS-07	M12×1.5	12	3~6.5	8.5	18/15	50
MG12BS-05	M12×1.5	12	2.5~5.5	8.5	18/15	50
MG14B-08	M14×1.5	14	4~8	8.5	18/19	50
MG14B-05	M14×1.5	14	3~5	8.5	18/19	50
MG14B-03	M14×1.5	14	1.5~3	8.5	18/19	50
MG16B-10	M16×1.5	16	6~10	10	22/22	50
MG16B-07	M16×1.5	16	4~7	10	22/22	50
MG16BS-08	M16×1.5	16	4~8	10	22/19	50
MG16BS-05	M16×1.5	16	3~5	10	22/19	50
MG18B-10	M18×1.5	18	6~10	10	24/22	50
MG18B-07	M18×1.5	18	4~7	10	24/22	50
MG18DB-12	M18×1.5	18	7~12	10	24/24	50
MG18DB-09	M18×1.5	18	5~9	10	24/24	50
MG20B-14	M20×1.5	20	8~14	10	27/27	50
MG20B-11	M20×1.5	20	6~11	10	27/27	50
MG20B-07	M20×1.5	20	4~7	10	27/27	50
MG20BS-12	M20×1.5	20	6~12	10	27/24	50
MG20BS-09	M20×1.5	20	5~9	10	27/24	50
MG20BM-10	M20×1.5	20	6~10	10	27/22	50
MG20BM-07	M20×1.5	20	4~7	10	27/22	50
MG22B-14	M22×1.5	22	8~14	10	29/27	50
MG22B-11	M22×1.5	22	6~11	10	29/27	50
MG22B-07	M22×1.5	22	4~7	10	29/27	50
MG24B-14	M24×1.5	24	8~14	10	30/27	50
MG24B-11	M24×1.5	24	6~11	10	30/27	50
MG24B-07	M24×1.5	24	4~7	10	30/27	50
MG25B-18	M25×1.5	25	13~18	12	33/33	50

MG25B-13	M25×1.5	25	7~13	12	33/33	50
MG25B-08	M25×1.5	25	4~8	12	33/33	50
MG25BS-14	M25×1.5	25	8~14	12	33/27	50
MG25BS-11	M25×1.5	25	7~11	12	33/27	50
MG25BS-09	M25×1.5	25	5~9	12	33/27	50
MG25BS-07	M25×1.5	25	4~7	12	33/27	50
MG27B-18	M27×	27	13~18	15	34/33	50
MG27B-13	M27×	27	7~13	15	34/33	50
MG27B-08	M27×	27	4~8	15	34/33	50
MG30B-25	M30×1.5	30	20~25	15	41/41	50
MG30B-20	M30×1.5	30	16~21	12	37/35	50
MG30B-15	M30×1.5	30	9~15	12	37/35	50
MG32B-25	M32×1.5	32	18~25	15	41/41	20
MG32B-22	M32×1.5	32	16~22	15	41/41	20
MG32B-18	M32×1.5	32	13~18	15	41/41	20
MG32B-12	M32×1.5	32	8~12	15	41/41	20
MG32BS-18	M32×1.5	32	13~18	15	41/33	20
MG32BS-16	M32×1.5	32	11~16	15	41/33	20
MG32BS-12	M32×1.5	32	6~12	15	41/33	20
MG36B-25	M36×	36	18~25	12	45/41	20
MG36B-22	M36×	36	16~22	12	45/41	20
MG36B-18	M36×	36	13~18	12	45/41	20
MG36B-12	M36×	36	8~12	12	45/41	20
MG40B-32	M40×1.5	40	24~32	20	50/50	10
MG40B-25	M40×1.5	40	18~25	20	50/50	10
MG40BS-25	M40×1.5	40	18~25	20	50/41	10
MG40BS-22	M40×1.5	40	16~22	20	50/41	10
MG40BS-18	M40×1.5	40	13~18	20	50/41	10
MG40BS-12	M40×1.5	40	6~12	20	50/41	10
MG42B-32	M42×2.0	42	24~32	15	52/50	10
MG42B-25	M42×2.0	42	18~25	15	52/50	10
MG48B-32	M48×2.0	48	31~41	16	50/50	10
MG48B-28	M48×2.0	48	22~28	16	50/50	10
MG50B-41	M50×1.5	50	31~41	22	62/62	10
MG50B-28	M50×1.5	50	22~28	22	62/62	10
MG56B-41	M56×2.0	56	31~41	16	64/50	10
MG56B-28	M56×2.0	56	22~28	16	64/50	10
MG60B-44	M60×2.0	60	35~45	18	72/75	10
MG63B-45	M63×1.5	63	35~45	18	75/65	10

B型连体-尼龙电缆防水接头/PG

B-type Nylon cable waterproof gland/PG

产品材料：尼龙PA6

螺纹规格：德制PG牙，符合DIN40430标准

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：密封件连体式设计，防水密封性好，抗拉力强

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: PG teeth, DIN40430 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

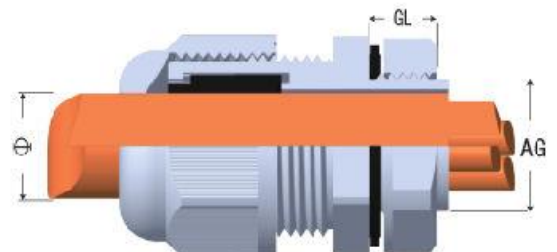

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7B-08	PG7	12.5	4~8	8.5	17/19	50
PG7B-05	PG7	12.5	3~5	8.5	17/19	50
PG7B-03	PG7	12.5	1.5~3	8.5	17/19	50
PG7BS-07	PG7	12.5	3~6.5	8.5	17/15	50
PG7BS-05	PG7	12.5	2.5~5.5	8.5	17/15	50
PG9B-08	PG9	15.2	4~8	8.5	22/19	50
PG9B-05	PG9	15.2	3~5	8.5	22/19	50
PG9B-03	PG9	15.2	1.5~3	8.5	22/19	50
PG11B-10	PG11	18.6	6~10	10	22/22	50
PG11B-07	PG11	18.6	4~7	10	22/22	50
PG13.5B-12	PG13.5	20.4	6~12	10	27/24	50
PG13.5B-09	PG13.5	20.4	5~9	10	27/24	50
PG16B-14	PG16	22.5	8~14	11	30/27	50
PG16B-11	PG16	22.5	6~11	11	30/27	50
PG16B-07	PG16	22.5	4~7	11	30/27	50
PG19B-14	PG19	23.5	8~14	11	30/27	50
PG19B-11	PG19	23.5	6~11	11	30/27	50
PG19B-07	PG19	23.5	4~7	11	30/27	50
PG21B-18	PG21	28.3	13~18	12	36/33	50
PG21B-13	PG21	28.3	8~13	12	36/33	50
PG21B-08	PG21	28.3	4~8	12	36/33	50
PG25B-20	PG25	30	14~20	12.5	36/37	50
PG25B-15	PG25	30	10~15	12.5	36/37	50
PG29B-25	PG29	37	18~25	12	46/41	50
PG29B-22	PG29	37	16~22	12	46/41	50
PG29B-18	PG29	37	13~18	12	46/41	50
PG29B-12	PG29	37	7~12	12	46/41	50
PG36B-32	PG36	47	24~32	15	57/50	50
PG36B-25	PG36	47	18~25	15	57/50	50
PG42B-41	PG42	54	31~41	15.5	64/62	50
PG42B-28	PG42	54	22~28	15.5	64/62	50
PG48B-45	PG48	59.3	35~45	15.5	70/65	50

B型连体-尼龙电缆防水接头/G

B-type Nylon cable waterproof gland/G

产品材料: 尼龙PA6

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母 (NPT不带螺母) , 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: G (PF) thread, GB/T706.1-2000 standard, NPT thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut (NPT without nuts) , no need to specify

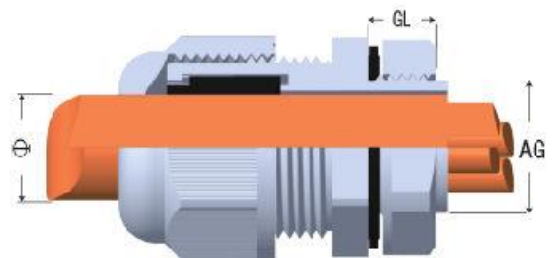

·产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
G1/4B-08	G1/4	13.15	4~8	8.5	19/19	50
G1/4B-05	G1/4	13.15	3~5	8.5	19/19	50
G1/4B-03	G1/4	13.15	2~3	8.5	19/19	50
G3/8B-10	G3/8	16.66	6~10	10	22/22	50
G3/8B-07	G3/8	16.66	4~7	10	22/22	50
G1/2B-12	G1/2	20.95	6~12	10	27/24	50
G1/2B-09	G1/2	20.95	5~9	10	27/24	50
G3/4B-18	G3/4	26.44	13~18	12	33/33	50
G3/4B-13	G3/4	26.44	7~13	12	33/33	50
G3/4B-08	G3/4	26.44	4~8	12	33/33	50
G1B-25	G1	33.2	18~25	13.5	42/41	20
G1B-22	G1	33.2	16~22	13.5	42/41	20
G1B-18	G1	33.2	13~18	13.5	42/41	20
G1B-12	G1	33.2	7~12	13.5	42/41	20
G1-1/4B-32	G1-1/4	41.9	24~32	15	51/50	10
G1-1/4B-25	G1-1/4	41.9	18~25	15	51/50	10
G1-1/2B-41	G1-1/2	47.8	31~41	16	62/62	10
G1-1/2B-28	G1-1/2	47.8	22~28	16	62/62	10
G2B-45	G2	59.6	35~45	25	75/75	10

B型连体-尼龙电缆防水接头/NPT

B-type Nylon cable waterproof gland/NPT

产品材料：尼龙PA6

螺纹规格：美制NPT牙，符合GB/T706.1-2000标准

产品颜色：黑色（RAL9005），灰白色(RAL7035)


产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：密封件连体式设计，防水密封性好，抗拉力强

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母（NPT不带螺母），无需请说明

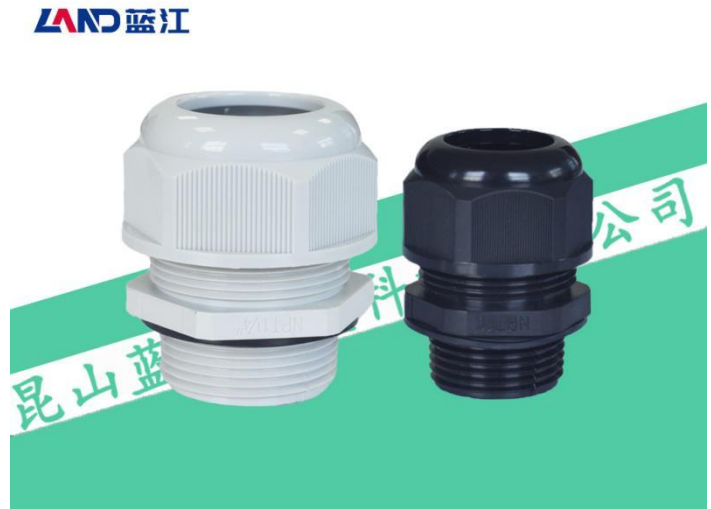

Product Material: Nylon PA6

Thread specification: NPT thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut (NPT without nuts) , no need to specify

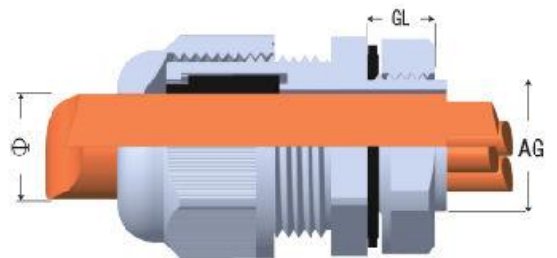

·产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
NPT1/4B-08	NPT1/4	13.15	4~8	8.5	19/19	50
NPT1/4B-05	NPT1/4	13.15	3~5	8.5	19/19	50
NPT1/4B-03	NPT1/4	13.15	2~3	8.5	19/19	50
NPT3/8B-10	NPT3/8	16.66	6~10	10	22	50
NPT3/8B-07	NPT3/8	16.66	4~7	10	22	50
NPT1/2B-12	NPT1/2	20.95	6~12	10	27	50
NPT1/2B-09	NPT1/2	20.95	5~9	10	27	50
NPT3/4B-18	NPT3/4	26.44	13~18	15	33	50
NPT3/4B-13	NPT3/4	26.44	7~13	15	33	50
NPT3/4B-08	NPT3/4	26.44	4~8	15	33	50
NPT1B-25	NPT1	33.5	18~25	17	41	20
NPT1B-22	NPT1	33.5	16~22	17	41	20
NPT1B-18	NPT1	33.5	13~18	17	41	20
NPT1B-12	NPT1	33.5	7~12	17	41	20
NPT1-1/4B-32	NPT1-1/4	42	24~32	17	50	10
NPT1-1/4B-25	NPT1-1/4	42	18~25	17	50	10
NPT1-1/2B-41	NPT1-1/2	48	31~41	17	52	10
NPT1-1/2B-28	NPT1-1/2	48	22~28	17	52	10
NPT2B-45	NPT2	60	35~45	20	68	10

加长尼龙电缆防水接头/M/PG

Long thread nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：密封件连体式设计，防水密封性好，抗拉力强

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, PG thread

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

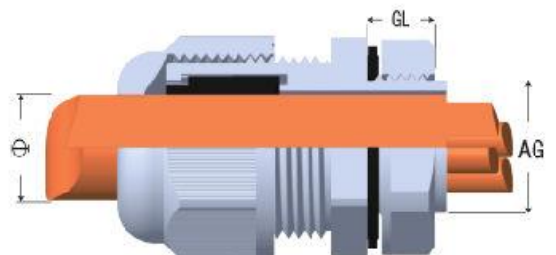

·产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12BL-08	M12×1.5	12	4~8	15	18/19	50
MG12BL-05	M12×1.5	12	3~5	15	18/19	50
MG12BSL-07	M12×1.5	12	3~6.5	15	18/15	50
MG12BSL-05	M12×1.5	12	2.5~5.5	15	18/15	50
MG16BL-10	M16×1.5	16	6~10	15	22/22	50
MG16BL-07	M16×1.5	16	4~7	15	22/22	50
MG16BSL-08	M16×1.5	16	4~8	15	22/19	50
MG18BL-10	M18×1.5	18	6~10	15	24/22	50
MG18BL-07	M18×1.5	18	4~7	15	24/22	50
MG20BL-14	M20×1.5	20	8~14	15	27/27	50
MG20BL-11	M20×1.5	20	6~11	15	27/27	50
MG20BL-07	M20×1.5	20	4~7	15	27/27	50
MG20BSL-12	M20×1.5	20	6~12	15	27/24	50
MG20BSL-09	M20×1.5	20	5~9	15	27/24	50
MG25BL-18	M25×1.5	25	13~18	15	33/33	50
MG25BL-13	M25×1.5	25	7~13	15	33/33	50
MG25BL-08	M25×1.5	25	4~8	15	33/33	50
MG32BL-25	M32×1.5	32	18~25	15	41/41	20
MG32BL-22	M32×1.5	32	16~22	15	41/41	20
MG32BL-18	M32×1.5	32	13~18	15	41/41	20
MG32BL-12	M32×1.5	32	8~12	15	41/41	20
PG7BL-08	PG7	12.5	4~8	15	17/19	50
PG7BL-05	PG7	12.5	3~5	15	17/19	50
PG7BSL-07	PG7	12.5	3~6.5	15	17/15	50
PG9BL-08	PG9	15.2	4~8	15	22/19	50
PG9BL-05	PG9	15.2	3~5	15	22/19	50
PG9BL-03	PG9	15.2	1.5~3	15	22/19	50
PG11BL-10	PG11	18.6	6~10	15	22/22	50
PG11BL-07	PG11	18.6	4~7	15	22/22	50
PG13.5BL-12	PG13.5	20.4	6~12	15	27/24	50
PG13.5BL-09	PG13.5	20.4	5~9	15	27/24	50
PG16BL-14	PG16	22.5	8~14	15	30/27	50
PG16BL-11	PG16	22.5	6~11	15	30/27	50
PG16BL-07	PG16	22.5	4~7	15	30/27	50
PG21BL-18	PG21	28.3	13~18	15	36/33	50
PG21BL-13	PG21	28.3	8~13	15	36/33	50
PG21BL-08	PG21	28.3	4~8	15	36/33	50
PG29BL-25	PG29	37	18~25	15	46/41	50
PG29BL-22	PG29	37	16~22	15	46/41	50
PG29BL-18	PG29	37	13~18	15	46/41	50
PG29BL-12	PG29	37	7~12	15	46/41	50

A型分体-尼龙电缆防水接头/M

A-type Nylon cable waterproof gland/M

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)


产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 密封件分体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

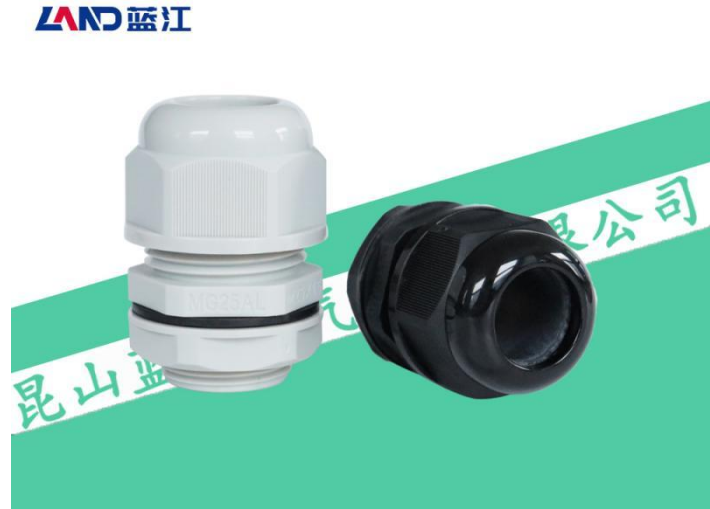

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



·产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-08	M12×1.5	12	4~8	8.5	18/19	50
MG12A-05	M12×1.5	12	3~5	8.5	18/19	50
MG12A-03	M12×1.5	12	2~3	8.5	18/19	50
MG12A-6.5	M12×1.5	12	3.5~6.5	8.5	18/19	50
MG12A-6.7	M12×1.5	12	3.5~6.7	8.5	18/19	50
MG16A-10	M16×1.5	16	6~10	15	22/22	50
MG16A-07	M16×1.5	16	4~7	15	22/22	50
MG16A-05	M16×1.5	16	3~5	15	22/22	50
MG16A-04	M16×1.5	16	2~4	15	22/22	50
MG16AS-08	M16×1.5	16	4~8	10	22/19	50
MG16AS-05	M16×1.5	16	3~5	10	22/19	50
MG16AS-03	M16×1.5	16	3~5	10	22/19	50
MG16AS-6.5	M16×1.5	16	3.5~6.5	10	22/19	50
MG16AS-6.7	M16×1.5	16	3.5~6.7	10	22/19	50
MG16DA-11	M16×1.5	16	6~11	15	22/27	50
MG18A-14	M18×1.5	18	8.5-14	15	24/27	50
MG20A-14	M20×1.5	20	8~14	15	27/27	50
MG20A-11	M20×1.5	20	6~11	15	27/27	50
MG20A-06	M20×1.5	20	3~6.5	15	27/27	50
MG20AS-12	M20×1.5	20	6~12	10	27/24	50
MG20AS-11	M20×1.5	20	5~10.5	10	27/24	50
MG20AS-09	M20×1.5	20	5~9	10	27/24	50
MG20DA-15	M20×1.5	20	13-15	15	27/33	50
MG22A-14	M22×1.5	22	8~14	10	29/27	50
MG22A-11	M22×1.5	22	6~11	10	29/27	50
MG22A-6.5	M22×1.5	22	3~6.5	10	29/27	50
MG25A-18	M25×1.5	25	13~18	15	33/33	50
MG25A-16	M25×1.5	25	10~16	15	33/33	50
MG25A-14	M25×1.5	25	8~14	15	33/33	50
MG25A-10	M25×1.5	25	6~10	15	33/33	50

MG25A-09	M25×1.5	25	5~9	15	33/33	50
MG25A-08	M25×1.5	25	4~8	15	33/33	50
MG25A-06	M25×1.5	25	3~6	15	33/33	50
MG25AS-14	M25×1.5	25	8~14	12	33/27	50
MG25AS-11	M25×1.5	25	6~11	12	33/27	50
MG25AS-06	M25×1.5	25	3~6.5	12	33/27	50
MG32A-25	M32×1.5	32	18~25	15	41/41	20
MG32A-22	M32×1.5	32	16~22	15	41/41	20
MG40A-32	M40×1.5	40	24~32	20	50/50	10
MG40A-25	M40×1.5	40	18~25	20	50/50	10
MG50A-41	M50×1.5	50	31~41	22	62/62	10
MG50A-33	M50×1.5	50	26~33	22	62/62	10
MG63A-51	M63×1.5	63	44~51	25	75/78	10
MG63A-46	M63×1.5	63	39~46	25	75/78	10
MG63A-35	M63×1.5	63	28~35	25	75/78	10
MG72A-55	M72×2.0	72	43~55	25	75/78	1
MG75A-66	M75×2.0	75	56~66	25	92/92	1
MG75A-62	M75×2.0	75	56~62	25	92/92	1
MG75A-56	M75×2.0	75	50~56	25	92/92	1
MG90A-77	M90×2.0	90	66~77	25	110/110	1
MG90A-68	M90×2.0	90	58~68	25	110/110	1

A型分体-尼龙电缆防水接头/PG

A-type Nylon cable waterproof gland/PG

产品材料：尼龙PA6

螺纹规格：德制PG牙，符合DIN40430标准

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：密封件分体式设计，防水密封性好，抗拉力强

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明



Product Material: Nylon PA6

Thread specification: PG teeth, DIN40430 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

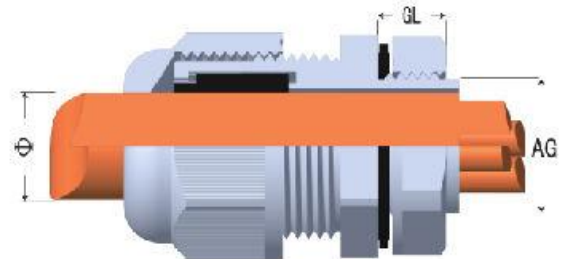

·产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7A-08	PG7	12.5	4~8	8.5	17/19	50
PG7A-05	PG7	12.5	3~5	8.5	17/19	50
PG7A-03	PG7	12.5	2~3	8.5	17/19	50
PG9A-08	PG9	15.2	4~8	8.5	22/19	50
PG9A-05	PG9	15.2	3~5	8.5	22/19	50
PG9A-03	PG9	15.2	2~3	8.5	22/19	50
PG9DA-10	PG9	12.5	6~10	9.3	22/22	50
PG11A-10	PG11	18.6	6~10	10	22/22	50
PG11A-07	PG11	18.6	4~7	10	22/22	50
PG11A-05	PG11	18.6	3~5	10	22/22	50
PG11A-04	PG11	18.6	2~4	10	22/22	50
PG13.5A-12	PG13.5	20.4	6~12	10	27/24	50
PG13.5A-11	PG13.5	20.4	6.5~10.5	10	27/24	50
PG13.5A-09	PG13.5	20.4	5~9	10	27/24	50
PG13.5DA-14	PG13.5	20.4	8.5-14	10.8	27/27	50
PG16A-14	PG16	22.5	8~14	11	30/27	50
PG16A-11	PG16	22.5	6~11	11	30/27	50
PG16A-06	PG16	22.5	3~6.5	11	30/27	50
PG16DA-18	PG16	22.5	13~18	11	30/33	50
PG21A-18	PG21	28.3	13~18	12	36/33	50
PG21A-16	PG21	28.3	10~16	12	36/33	50
PG21A-14	PG21	28.3	8~14	12	36/33	50
PG21A-10	PG21	28.3	6~10	12	36/33	50
PG21A-09	PG21	28.3	6~9	12	36/33	50
PG21A-08	PG21	28.3	4~8	12	36/33	50
PG21A-06	PG21	28.3	3~6.5	12	36/33	50
PG29A-25	PG29	37	18~25	12	46/41	20
PG29A-22	PG29	37	16~22	12	46/41	20
PG36A-32	PG36	47	24~32	15	57/50	10
PG36A-25	PG36	47	18~25	15	57/50	10
PG42A-41	PG42	54	31~41	15.5	64/62	10
PG42A-33	PG42	54	26~33	15.5	64/62	10
PG48A-51	PG48	59.3	44~51	16	75/78	10
PG48A-46	PG48	59.3	39~46	16	75/78	10
PG48A-35	PG48	59.3	28~35	16	75/78	10

A型分体-尼龙电缆防水接头/G(PF)

A-type Nylon cable waterproof gland/G(PF)

产品材料: 尼龙PA6

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 密封件分体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: G (PF) thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

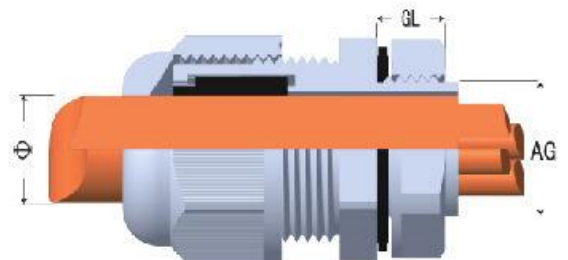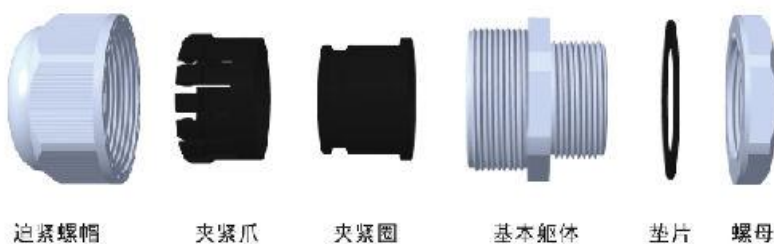

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
G1/4A-08	G1/4	13.15	4~8	8.5	19/19	50
G1/4A-05	G1/4	13.15	3~5	8.5	19/19	50
G1/4A-03	G1/4	13.15	2~3	8.5	19/19	50
G1/4A-6.5	G1/4	13.15	3~6.5	8.5	19/19	50
G1/4A-6.7	G1/4	13.15	3~6.7	8.5	19/19	50
G3/8A-10	G3/8	16.66	6~10	15	22/22	50
G3/8A-07	G3/8	16.66	4~7	15	22/22	50
G3/8A-05	G3/8	16.66	3~5	15	22/22	50
G3/8A-04	G3/8	16.66	2~4	15	22/22	50
G1/2A-12	G1/2	20.95	6~12	10	27/24	50
G1/2A-10	G1/2	20.95	5.5~10	10	27/24	50
G1/2A-09	G1/2	20.95	5~9	10	27/24	50
G1/2AL-14	G1/2	20.95	8~14	15	30/27	50
G1/2AL-11	G1/2	20.95	6~11	15	30/27	50
G1/2AL-06	G1/2	20.95	3~6.5	15	30/27	50
G3/4A-18	G3/4	26.44	13~18	15	33/33	50
G3/4A-16	G3/4	26.44	10~16	15	33/33	50
G3/4A-14	G3/4	26.44	8~14	15	33/33	50
G3/4A-13	G3/4	26.44	7~13	15	33/33	50
G3/4A-10	G3/4	26.44	6~10	15	33/33	50
G3/4A-09	G3/4	26.44	6~9	15	36/33	50
G3/4A-08	G3/4	26.44	4~8	15	36/33	50
G3/4A-06	G3/4	26.44	3~6.5	15	36/33	50
G1A-25	G1	33.2	18~25	15	42/41	20
G1A-22	G1	33.2	16~22	15	42/41	20
G1-1/4A-32	G1-1/4	41.9	24~32	16	51/50	10
G1-1/4A-25	G1-1/4	41.9	18~25	16	51/50	10
G1-1/2A-41	G1-1/2	47.8	31~41	22	62/62	10
G1-1/2A-33	G1-1/2	47.8	26~33	22	62/62	10
G2A-51	G2	59.6	44~51	25	75/75	10
G2A-46	G2	59.6	39~46	25	75/75	10
G2A-35	G2	59.6	28~35	25	75/75	10

扁孔尼龙电缆防水接头

Flat hole Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：扁形密封圈设计，可锁紧扁电缆与伴热带

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, PG, G(PF)-thread

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Flat sealing ring, capable of locking flat cables and heat tracing tape

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

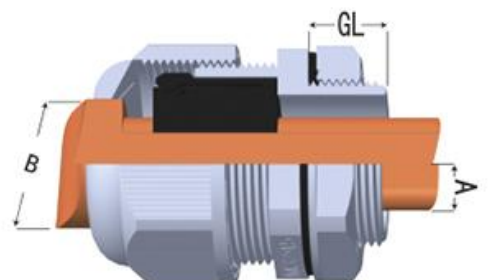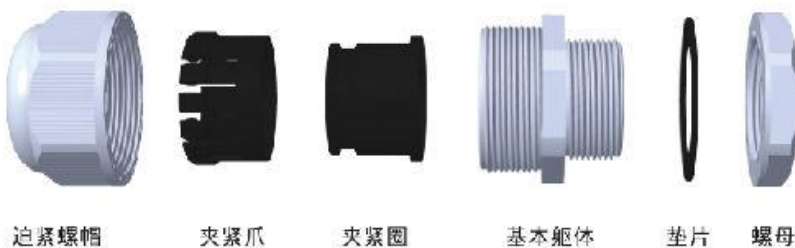

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG10B-0306	M10×1.5	10	3*6	8	15/12	50
MG20AS-0508	M20×1.5	20	5*8	10	27/24	50
MG20AS-0712	M20×1.5	20	7*12	10	27/24	50
MG20A-0410	M20×1.5	20	4*10	15	27/27	50
MG20A-0612	M20×1.5	20	6*12	15	27/27	50
MG20A-0814	M20×1.5	20	8*14	15	27/27	50
MG20B-0308	M20×1.5	20	3*8	15	27/27	50
MG20B-0509	M20×1.5	20	5*9	15	27/27	50
MG20B-0714	M20×1.5	20	7*14	15	27/27	50
MG22A-0410	M22×1.5	22	4*10	10	29/27	50
MG22A-0612	M22×1.5	22	6*12	10	29/27	50
MG22A-0814	M22×1.5	22	8*14	10	29/27	50
MG22B-0308	M22×1.5	22	3*8	10	29/27	50
MG22B-0509	M22×1.5	22	5*9	10	29/27	50
MG22B-0714	M22×1.5	22	7*14	10	29/27	50
MG24B-0308	M24×1.5	24	3*8	10	30/27	50
MG24B-0509	M24×1.5	24	5*9	10	30/27	50
MG24B-0714	M24×1.5	24	7*14	10	30/27	50
MG25AS-0410	M25×1.5	25	4*10	12	33/27	50
MG25AS-0612	M25×1.5	25	6*12	12	33/27	50
MG25AS-0814	M25×1.5	14	8*14	12	33/27	50
MG25BS-0308	M25×1.5	25	3*8	12	33/27	50
MG25BS-0509	M25×1.5	25	5*9	12	33/27	50
MG25BS-0714	M25×1.5	25	7*14	12	33/27	50
MG25A-0511	M25×1.5	25	5*11	15	33/33	50
MG25A-0614	M25×1.5	25	7*14	15	33/33	50
MG32AS-0511	M32×1.5	32	5*11	15	41/33	50
MG32AS-0614	M32×1.5	32	7*14	15	41/33	50
MG32A-0519	M32×1.5	40	5*9	15	41/41	20
MG40A-1230	M40×1.5	40	12*30	20	50/50	10
MG50A-1334	M50×1.5	50	12*34	22	62/62	10
MG63A-1642	M63×1.5	63	10*42	25	75/78	10
MG63A-2055	M63×1.5	63	20*55	25	75/78	10

产品参数表/PG/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG13. 5A-0712	PG13. 5	20. 4	7*12	10	27/24	50
PG13. 5A-0508	PG13. 5	20. 4	5*8	10	27/24	50
PG16B-0308	PG16	22. 5	3*8	11	30/27	50
PG16B-0509	PG16	22. 5	5*9	11	30/27	50
PG16B-0714	PG16	22. 5	7*14	11	30/27	50
PG16A-0410	PG16	22. 5	4*10	11	30/27	50
PG16A-0612	PG16	22. 5	6*12	11	30/27	50
PG16A-0814	PG16	22. 5	8*14	11	30/27	50
PG21A-0511	PG21	28. 3	5*11	12	36/33	50
PG21A-0614	PG21	28. 3	7*14	12	36/33	50
PG29A-0519	PG29	37	5*9	12	46/41	20
PG36A-1230	PG36	47	12*30	15	57/50	10
PG42A-1334	PG42	47	12*34	15. 5	64/62	10
PG48A-1042	PG48	59. 3	10*42	16	75/78	10
PG48A-2055	PG48	59. 3	20*44	16	75/78	10
G1/2A-0410	G1/2	20. 4	4*10	15	30/27	50
G1/2A-0612	G1/2	20. 4	6*12	15	30/27	50
G1/2A-0814	G1/2	20. 4	8*14	15	30/27	50
G3/4A-0511	G3/4	26. 66	5*11	15	33/33	50
G3/4A-0614	G3/4	26. 66	7*14	15	33/33	50
G1A-0519	G1	33. 2	5*9	15	42/41	20
G1-1/4A-1230	G1-1/4	41. 9	12*30	16	51/50	10
G1-1/2A-1334	G1-1/2	47. 8	12*34	22	62/62	10
G2A-1042	G2	59. 6	10*42	25	75/75	10
G2A-2044	G2	59. 6	20*44	25	75/75	10

二孔分体尼龙电缆防水接头

Two holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

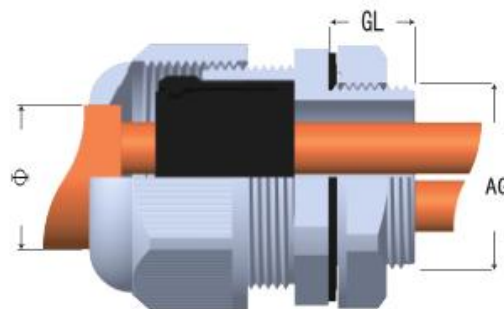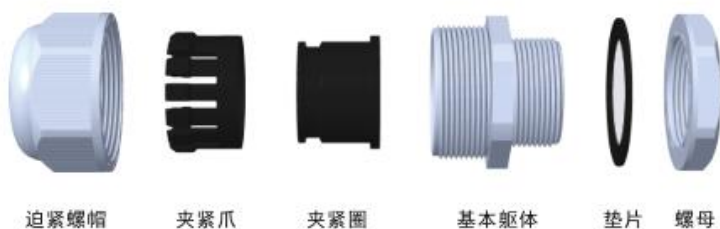

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-H2-03	M12×1.5	12	1.5~3	8.5	18/19	50
MG16AS-H2-03	M16×1.5	16	1.5~3	10	22/19	50
MG16A-H2-02	M16×1.5	16	1.5~2.6	15	22/22	50
MG16A-H2-04	M16×1.5	16	2~4	15	22/22	50
MG20AS-H2-05	M20×1.5	20	2~5	10	27/24	50
MG20A-H2-03	M20×1.5	20	1.5~3	15	27/27	50
MG20A-H2-04	M20×1.5	20	2~4	15	27/27	50
MG20A-H2-05	M20×1.5	20	2~5	15	27/27	50
MG20A-H2-06	M20×1.5	20	3~6	15	27/27	50
MG20A-H2-07	M20×1.5	20	4~7	15	27/27	50
MG22A-H2-03	M22×1.5	22	1.5~3	10	29/27	50
MG22A-H2-04	M22×1.5	22	2~4	10	29/27	50
MG22A-H2-05	M22×1.5	22	2~5	10	29/27	50
MG22A-H2-06	M22×1.5	22	3~6	10	29/27	50
MG22A-H2-07	M22×1.5	22	4~7	10	29/27	50
MG25AS-H2-03	M25×1.5	25	1.5~3	12	33/27	50
MG25AS-H2-04	M25×1.5	25	2~4	12	33/27	50
MG25AS-H2-05	M25×1.5	25	2~5	12	33/27	50
MG25AS-H2-06	M25×1.5	25	3~6	12	33/27	50
MG25AS-H2-07	M25×1.5	25	4~7	12	33/27	50
MG25A-H2-05	M25×1.5	25	3~5.5	15	33/33	50
MG25A-H2-06	M25×1.5	25	3~6	15	33/33	50
MG25A-H2-08	M25×1.5	25	5~8	15	33/33	50
MG25A-H2-09	M25×1.5	25	6~9	15	33/33	50
MG32A-H2-10	M32×1.5	32	6~10	15	41/41	20
MG32A-H2-12	M32×1.5	32	9~12	15	41/41	20
MG40A-H2-13	M40×1.5	40	9~13	20	50/50	10
MG50A-H2-15	M50×1.5	50	11~15	22	62/62	10
MG63A-H2-17	M63×1.5	63	14~17	25	75/78	10

产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG7A-H2-03	PG7	12.5	1.5~3	8.5	17/19	50
PG9A-H2-03	PG9	15.2	1.5~3	8.5	22/19	50
PG11A-H2-02	PG11	18.6	1.5~2.6	10	22/22	50
PG11A-H2-04	PG11	18.6	2~4	10	22/22	50
PG13.5A-H2-05	PG13.5	20.4	2~5	10	27/24	50
PG16A-H2-03	PG16	22.5	1.5~3	11	30/27	50
PG16A-H2-04	PG16	22.5	2~4	11	30/27	50
PG16A-H2-05	PG16	22.5	2~5	11	30/27	50
PG16A-H2-06	PG16	22.5	3~6	11	30/27	50
PG16A-H2-07	PG16	22.5	4~7	11	30/27	50
PG21A-H2-05	PG21	28.3	2~5	12	36/33	50
PG21A-H2-06	PG21	28.3	3~6	12	36/33	50
PG21A-H2-08	PG21	28.3	5~8	12	36/33	50
PG21A-H2-09	PG21	28.3	6~9	12	36/33	50
PG29A-H2-10	PG29	37	6~10	12	46/41	20
PG29A-H2-12	PG29	37	9~12	12	46/41	20
PG36A-H2-13	PG36	47	9~13	15	57/50	10
PG42A-H2-15	PG42	54	11~15	15.5	64/62	10
PG48A-H2-17	PG48	59.3	14~17	16	75/78	10
G1/4A-H2-03	G1/4	13.15	1.5~3	8.5	19/19	50
G3/8A-H2-02	G3/8	16.66	1.5~2.6	15	22/22	50
G3/8A-H2-04	G3/8	16.66	2~4	15	22/22	50
G1/2A-H2-03	G1/2	20.95	1.5~3	15	27/27	50
G1/2A-H2-04	G1/2	20.95	2~4	15	27/27	50
G1/2A-H2-05	G1/2	20.95	2~5	15	27/27	50
G1/2A-H2-06	G1/2	20.95	3~6	15	27/27	50
G1/2AD-H2-08	G1/2	20.95	5~8	15	27/33	50
G3/4A-H2-05	G3/4	26.44	3~5.5	15	33/33	50
G3/4A-H2-06	G3/4	26.44	3~6	15	33/33	50
G3/4A-H2-08	G3/4	26.44	5~8	15	33/33	50
G1A-H2-10	G1	33.2	6~10	15	42/41	20
G1A-H2-12	G1	33.2	8~12	15	42/41	20
G1-1/4A-H2-13	G1-1/4	41.9	9~13	16	51/50	10
G1-1/2A-H2-15	G1-1/2	47.8	11~15	22	62/62	10
G2A-H2-17	G2	59.6	14~17	25	75/75	10

三孔分体尼龙电缆防水接头

Three holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

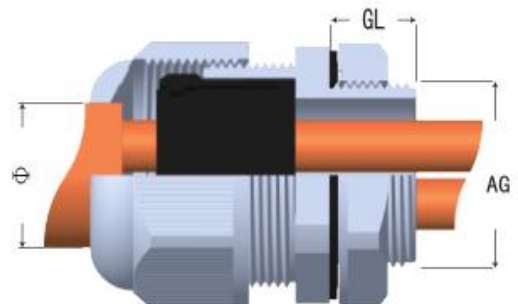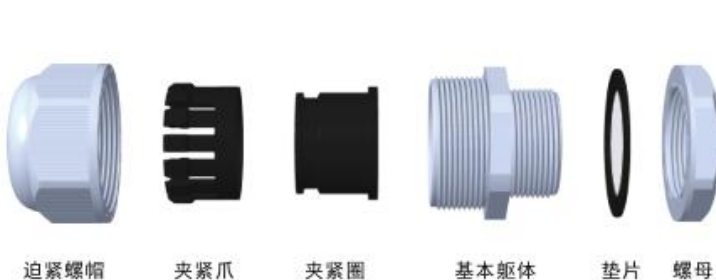

·产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-H3-02	M12×1.5	12	1~2.6	8.5	18/19	50
MG16AS-H3-02	M16×1.5	16	1~2.6	10	22/19	50
MG16A-H3-03	M16×1.5	20	1.5~3	15	22/22	50
MG16A-H3-04	M16×1.5	20	2~4	15	22/22	50
MG20AS-H3-05	M20×1.5	20	2~5	10	27/24	50
MG20A-H3-03	M20×1.5	20	1.5~3	15	27/27	50
MG20A-H3-05	M20×1.5	20	2~5	15	27/27	50
MG20A-H3-06	M20×1.5	20	3~6	15	27/27	50
MG22A-H3-03	M22×1.5	22	1.5~3	10	29/27	50
MG22A-H3-05	M22×1.5	22	2~5	10	29/27	50
MG22A-H3-06	M22×1.5	22	3~6	10	29/27	50
MG25AS-H3-03	M25×1.5	25	1.5~3	12	33/27	50
MG25AS-H3-05	M25×1.5	25	2~5	12	33/27	50
MG25AS-H3-06	M25×1.5	25	3~6	12	33/27	50
MG25A-H3-05	M25×1.5	25	2~5	15	33/33	50
MG25A-H3-06	M25×1.5	25	3~6	15	33/33	50
MG25A-H3-07	M25×1.5	25	4~7	15	33/33	50
MG25A-H3-08	M25×1.5	25	5~8	15	33/33	50
MG32A-H3-10	M32×1.5	32	6~10	15	41/41	20
MG40A-H3-11	M40×1.5	40	8~11	20	50/50	10
MG40A-H3-13	M40×1.5	40	10~13	20	50/50	10
MG40A-H3-14	M40×1.5	40	11~14	20	50/50	10
MG50A-H3-12	M50×1.5	50	9~12	22	62/62	10
MG63A-H3-13	M63×1.5	63	9~13	25	75/78	10

·产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7A-H3-02	PG7	12.5	1~2.6	8.5	17/19	50
PG9A-H3-02	PG9	15.2	1~2.6	8.5	22/19	50
PG11A-H3-03	PG11	18.6	1.5~3	10	22/22	50
PG11A-H3-04	PG11	18.6	2~4	10	22/22	50
PG13.5A-H3-05	PG13.5	20.4	2~5	10	27/24	50
PG16A-H3-03	PG16	28.3	1.5~3	11	30/27	50
PG16A-H3-05	PG16	22.5	2~5	11	30/27	50
PG16A-H3-06	PG16	22.5	3~6	11	30/27	50
PG21A-H3-05	PG21	28.3	2~5	12	36/33	50
PG21A-H3-06	PG21	28.3	3~6	12	36/33	50
PG21A-H3-07	PG21	28.3	4~7	12	36/33	50
PG21A-H3-08	PG21	28.3	5~8	12	36/33	50
PG29A-H3-10	PG29	37	6~10	12	46/41	20
PG36A-H3-11	PG36	47	8~11	15	57/50	10
PG36A-H3-13	PG36	47	10~13	15	57/50	10
PG36A-H3-14	PG36	47	11~14	15	57/50	10
PG42A-H3-12	PG42	54	9~12	15.5	64/62	10
PG48A-H3-13	PG48	59.3	9~13	16	75/78	10
G1/4A-H3-02	G1/4	13.15	1~2.6	8.5	19/19	50
G3/8A-H3-04	G3/8	16.66	2~4	15	22/22	50
G1/2A-H3-03	G1/2	20.95	1.5~3	10	27/27	50
G1/2A-H3-05	G1/2	20.95	2~5	10	27/27	50
G1/2A-H3-06	G1/2	20.95	3~6	10	27/27	50
G1/2AD-H3-08	G1/2	20.95	5~8	15	27/33	50
G3/4A-H3-05	G3/4	26.44	2~5	15	33/33	50
G3/4A-H3-06	G3/4	26.44	3~6	15	33/33	50
G3/4A-H3-07	G3/4	26.44	4~7	15	33/33	50
G3/4A-H3-08	G3/4	26.44	5~8	15	33/33	50
G1A-H3-10	G1	33.2	6~10	15	42/41	20
G1-1/4A-H3-11	G1-1/4	41.9	8~11	16	51/50	10
G1-1/4A-H3-13	G1-1/4	41.9	10~13	16	51/50	10
G1-1/4A-H3-14	G1-1/4	41.9	11~14	16	51/50	10
G1-1/2A-H3-12	G1-1/2	47.8	9~12	22	62/62	10
G2A-H3-13	G2	59.6	9~13	25	75/75	10

四孔分体尼龙电缆防水接头

Four holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

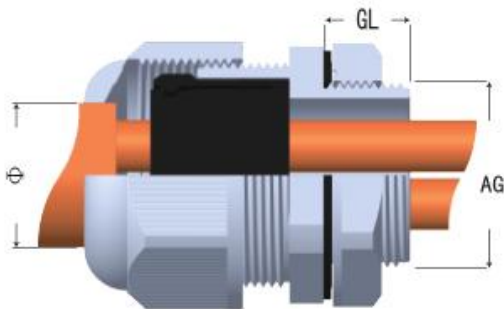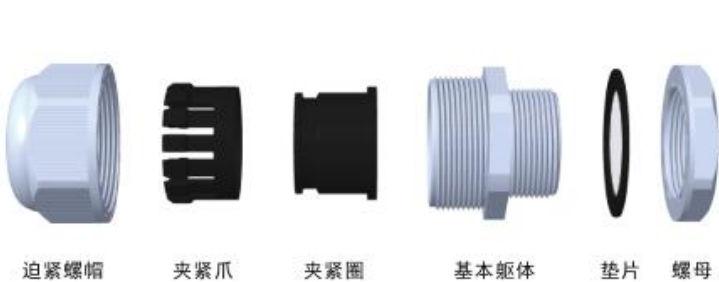

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-H4-02	M12×1.5	12	1~2.3	8.5	18/19	50
MG16AS-H4-02	M16×1.5	16	1~2.6	10	22/19	50
MG16A-H4-03	M16×1.5	16	1.5~3	15	22/22	50
MG20AS-H4-04	M20×1.5	20	2~4	10	27/24	50
MG20A-H4-03	M20×1.5	20	1~2.5	15	27/27	50
MG20A-H4-04	M20×1.5	20	1.5~3.5	15	27/27	50
MG20A-H4-05	M20×1.5	20	2~4.5	15	27/27	50
MG22A-H4-03	M22×1.5	22	1~2.5	10	29/27	50
MG22A-H4-04	M22×1.5	22	1.5~3.5	10	29/27	50
MG22A-H4-05	M22×1.5	22	2~4.5	10	29/27	50
MG25AS-H4-03	M25×1.5	25	1~2.5	12	33/27	50
MG25AS-H4-04	M25×1.5	25	1.5~3.5	12	33/27	50
MG25AS-H4-05	M25×1.5	25	2~4.5	12	33/27	50
MG25A-H4-05	M25×1.5	25	2~5	15	33/33	50
MG25A-H4-06	M25×1.5	25	3~6	15	33/33	50
MG25A-H4-07	M25×1.5	25	4~7	15	33/33	50
MG25A-H4-08	M25×1.5	25	5~8	15	33/33	50
MG32A-H4-07	M32×1.5	32	4~7	15	41/41	20
MG32A-H4-09	M32×1.5	32	6~9	15	41/41	20
MG40A-H4-11	M40×1.5	40	8~11	20	50/50	10
MG40A-H4-12	M40×1.5	40	9~12	20	50/50	10

产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7A-H4-02	PG7	12.5	1~2.3	8.5	17/19	50
PG9A-H4-02	PG9	15.2	1~2.3	8.5	22/19	50
PG11A-H4-03	PG11	18.6	1.5~3	10	22/22	50
PG13.5A-H4-04	PG13.5	20.4	2~4	10	27/24	50
PG16A-H4-03	PG16	22.5	1~2.5	11	30/27	50
PG16A-H4-04	PG16	22.5	1.5~3.5	11	30/27	50
PG16A-H4-05	PG16	22.5	2~4.5	11	30/27	50
PG21A-H4-05	PG21	28.6	2~5	12	36/33	50
PG21A-H4-06	PG21	28.6	3~6	12	36/33	50
PG21A-H4-07	PG21	28.6	4~7	12	36/33	50
PG21A-H4-08	PG21	28.6	5~8	12	36/33	50
PG29A-H4-07	PG29	37	4~7	12	46/41	20
PG29A-H4-09	PG29	37	6~9	12	46/41	20
PG36A-H4-11	PG36	47	8~11	15	57/50	10
PG36A-H4-12	PG36	47	9~12	15	57/50	10
G1/4A-H4-02	G1/4	13.15	1~2.3	8.5	19/19	50
G3/8A-H4-03	G3/8	16.66	1.5~3	15	22/22	50
G1/2A-H4-03	G1/2	20.95	1~2.5	10	27/27	50
G1/2A-H4-04	G1/2	20.95	1.5~3.5	10	27/27	50
G1/2A-H4-05	G1/2	20.95	2~4.5	10	27/27	50
G1/2A-H4-06	G1/2	20.95	3~6	10	27/33	50
G1/2A-H4-07	G1/2	20.95	4~7	10	27/33	50
G1/2A-H4-08	G1/2	20.95	5~8	10	27/33	50
G3/4A-H4-05	G3/4	26.66	2~5	15	33/33	50
G3/4A-H4-06	G3/4	26.66	3~6	15	33/33	50
G3/4A-H4-07	G3/4	26.66	4~7	15	33/33	50
G3/4A-H4-08	G3/4	26.66	5~8	15	33/33	50
G3/4A-H4-09	G3/4	26.66	6~9	15	33/33	50
G1A-H4-07	G1	33.2	4~7	15	42/41	20
G1A-H4-09	G1	33.2	6~9	15	42/41	20
G1-1/4A-H4-11	G1-1/4	41.9	8~11	16	51/50	10
G1-1/4A-H4-12	G1-1/4	41.9	9~12	16	51/50	10

五孔分体尼龙电缆防水接头

Five holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

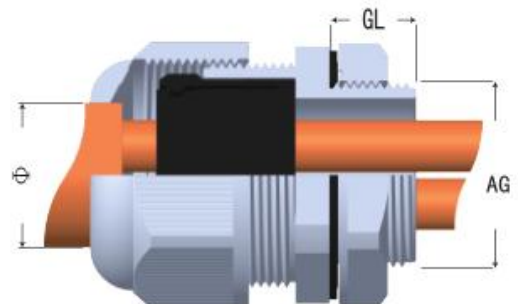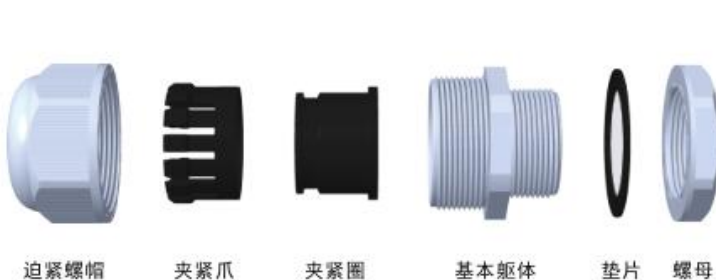

·产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG20A-H5-03	M20×1.5	20	1.5~3	15	27/27	50
MG20A-H5-04	M20×1.5	20	2~4	15	27/27	50
MG22A-H5-03	M22×1.5	22	1.5~3	10	29/27	50
MG22A-H5-04	M22×1.5	22	2~4	10	29/27	50
MG25AS-H5-03	M25×1.5	25	1.5~3	12	33/27	50
MG25AS-H5-04	M25×1.5	25	2~4	12	33/27	50
MG25A-H5-05	M25×1.5	25	3~5	15	33/33	50
MG25A-H5-06	M25×1.5	25	4~6	15	33/33	50
MG32A-H5-08	M32×1.5	32	5~8	15	41/41	20
MG40A-H5-08	M40×1.5	40	5~8	20	50/50	10
PG16A-H5-03	PG16	22.5	1.5~3	11	30/27	50
PG16A-H5-04	PG16	22.5	2~4	11	30/27	50
PG21A-H5-05	PG21	28.3	3~5	12	36/33	50
PG21A-H5-06	PG21	28.3	4~6	12	36/33	50
PG29A-H5-08	PG29	37	5~8	12	46/41	20
PG36A-H5-08	PG36	47	5~8	15	57/50	10
G1/2A-H5-03	G1/2	20.95	2~4	15	27/27	50
G1/2AD-H5-06	G1/2	20.95	4~6	15	27/33	50
G3/4A-H5-06	G3/4	26.66	4~6	15	33/33	50
G1A-H5-08	G1	33.2	5~8	15	42/41	20
G1-1/4A-H5-08	G1-1/4	41.9	5~8	16	51/50	10

六孔分体尼龙电缆防水接头

Six holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

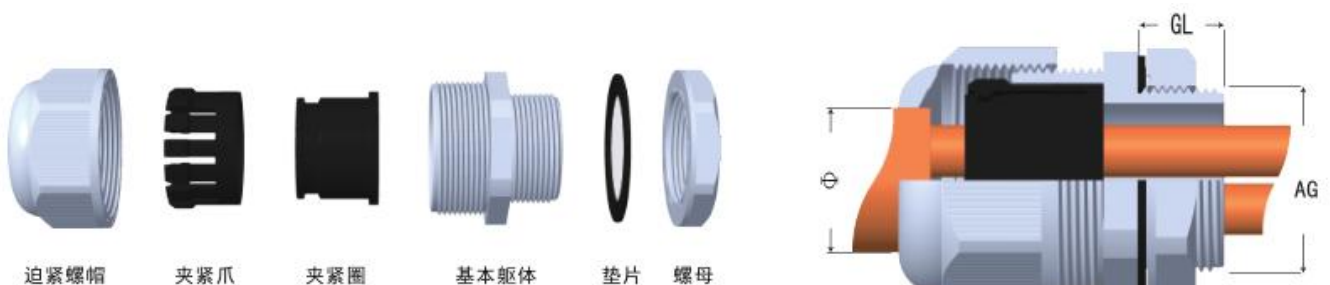


·产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG16A-H6-02	M16×1.5	16	1~2.1	15	22/22	50
MG20A-H6-03	M20×1.5	20	2~3.5	15	27/27	50
MG20A-H6-04	M20×1.5	20	2~4	15	27/27	50
MG22A-H6-03	M22×1.5	22	2~3.5	10	29/27	50
MG22A-H6-04	M22×1.5	22	2~4	10	29/27	50
MG25AS-H6-03	M25×1.5	25	2~3.5	15	33/27	50
MG25AS-H6-04	M25×1.5	25	2~4	15	33/27	50
MG25A-H6-05	M25×1.5	25	3~5	15	33/33	50
MG32A-H6-05	M32×1.5	32	3~5	15	41/41	20
MG32A-H6-07	M32×1.5	32	4~7	15	41/41	20
MG40A-H6-08	M40×1.5	40	5~8	20	50/50	10
MG63A-H6-12	M63×1.5	63	8~12	25	75/78	10
PG11A-H6-02	PG11	18.6	1~2.1	10	22/22	50
PG16A-H6-03	PG16	22.5	1.5~3	11	30/27	50
PG16A-H6-04	PG16	22.5	2~4	11	30/27	50
PG21A-H6-05	PG21	28.3	3~5	12	36/33	50
PG29A-H6-05	PG29	37	3~5	12	46/41	20
PG29A-H6-07	PG29	37	4~7	12	46/41	20
PG36A-H6-08	PG36	47	5~8	15	57/50	10
PG48A-H6-12	PG48	59.3	8~12	16	75/78	10
G3/8A-H6-02	G3/8	16.66	1~2.1	15	22/22	50
G1/2A-H6-03	G1/2	20.4	1.5~3	15	27/27	50
G1/2A-H6-04	G1/2	20.4	2~4	15	27/27	50
G1/2A-H6-05	G1/2	20.4	2~4	15	27/33	50
G3/4A-H6-05	G3/4	26.66	3~5	15	33/33	50
G1A-H6-05	G1	33.2	3~5	15	42/41	20
G1A-H6-07	G1	33.2	4~7	15	42/41	20
G1-1/4A-H6-08	G1-1/4	41.9	5~8	16	51/50	10
G2A-H6-12	G2	59.6	14~17	25	75/75	10

七孔分体尼龙电缆防水接头

Seven holes Nylon cable waterproof gland

- 产品材料：尼龙PA6
- 螺纹规格：公制M牙，德制PG牙，英制G(PF)牙
- 产品颜色：黑色（RAL9005），灰白色(RAL7035)
- 产品特性：符合CE，ROHS2.0，IP68、UL94V-2
- 温度测试：-40℃～105℃，短时可达120℃
- 产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

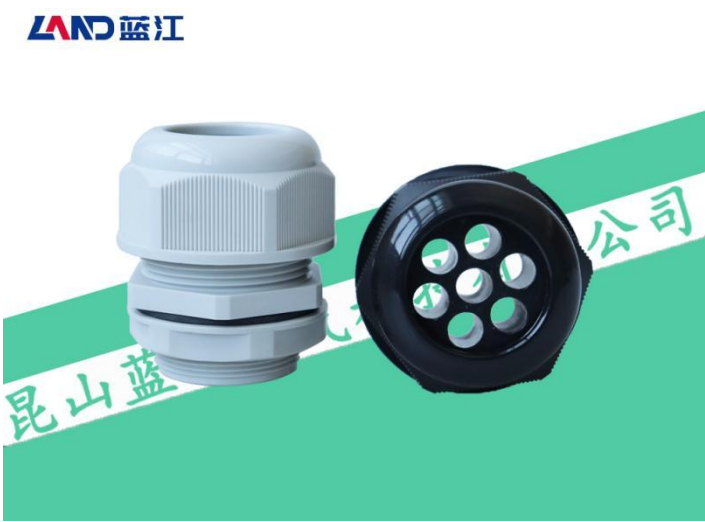

- Product Material: Nylon PA6
- Thread specification: metric M-thread, GB/T196-1981 standard
- Product color: Black (RAL9005), Light Grey (RAL7035)
- Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2
- Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time
- Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

七孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG25A-H7-04	M25×1.5	25	2～4	15	33/33	50
MG32A-H7-06	M32×1.5	32	4～6	15	41/41	20
MG40A-H7-08	M40×1.5	40	5～8	20	50/50	10
PG21A-H7-04	PG21	28.3	2～4	12	36/33	50
PG29A-H7-06	PG29	37	4～6	12	46/41	20
PG36A-H7-08	PG36	47	5～8	15	57/50	10
G1/2A-H7-04	G1/2	20.4	2～4	15	27/33	50
G3/4A-H7-04	G3/4	26.66	2～4.3	15	33/33	50
G1A-H7-06	G1	33.2	4～6	15	42/41	20
G1-1/4A-H7-08	G1-1/4	41.9	5～8	16	51/50	10

八孔分体尼龙电缆防水接头

Eight holes Nylon cable waterproof gland

- 产品材料：尼龙PA6
- 螺纹规格：公制M牙，德制PG牙，英制G(PF)牙
- 产品特性：符合CE，ROHS2.0，IP68、UL94V-2
- 温度测试：-40℃~105℃，短时可达120℃
- 产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

LAND 蓝江



- Product Material: Nylon PA6
- Thread specification: metric M-thread, GB/T196-1981 standard
- Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2
- Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time
- Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

八孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG16A-H8-02	M16×1.5	1~2.1	16	15	22/22	50
MG25A-H8-04	M25×1.5	2~4	25	15	33/33	50
MG32A-H8-05	M32×1.5	3~5	32	15	41/41	20
MG40A-H8-06	M40×1.5	4~6	40	20	50/50	10
PG11A-H8-02	PG11	1~2.1	18.6	10	22/22	50
PG21A-H8-04	PG21	2~4	28.3	12	36/33	50
PG29A-H8-05	PG29	3~5	37	12	46/41	20
PG36A-H8-06	PG36	4~6	47	15	57/50	10
G3/8A-H8-02	G3/8	1~2.1	16.66	15	22/22	50
G1/2A-H8-04	G1/2	2~4	20.4	15	27/33	50
G3/4A-H8-04	G3/4	2~4	26.66	15	33/33	50
G1A-H8-05	G1	3~5	33.2	15	42/41	20
G1-1/4A-H8-06	G1-1/4	4~6	41.9	16	51/50	10

九孔分体尼龙电缆防水接头

Nine holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)


产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

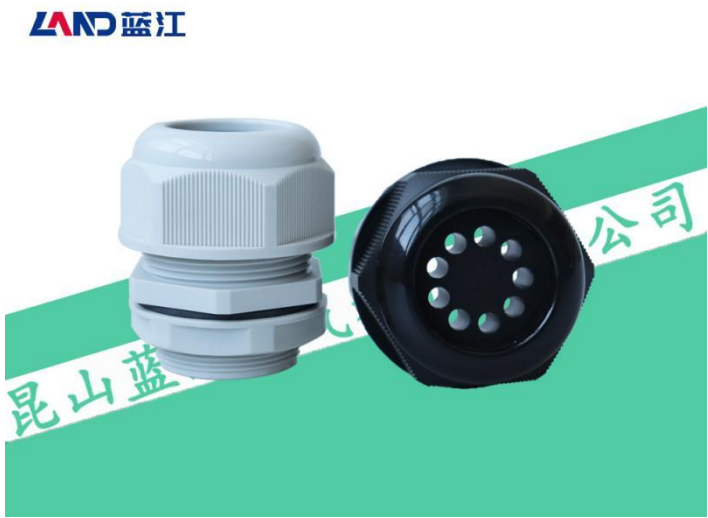

Product Material: Nylon PA6

Thread specification: metric M-thread,PG thread, G thread

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

九孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	φ mm	φ mm	GL mm	nut/cap mm	PCS
MG40A-H9-05	M40×1.5	3～5	40	20	50/50	10
PG36A-H9-05	PG36	3～5	47	15	57/50	10
G1-1/4A-H9-05	G1-1/4	3～5	41.9	16	51/50	10

十孔分体尼龙电缆防水接头

Ten holes Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)


产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

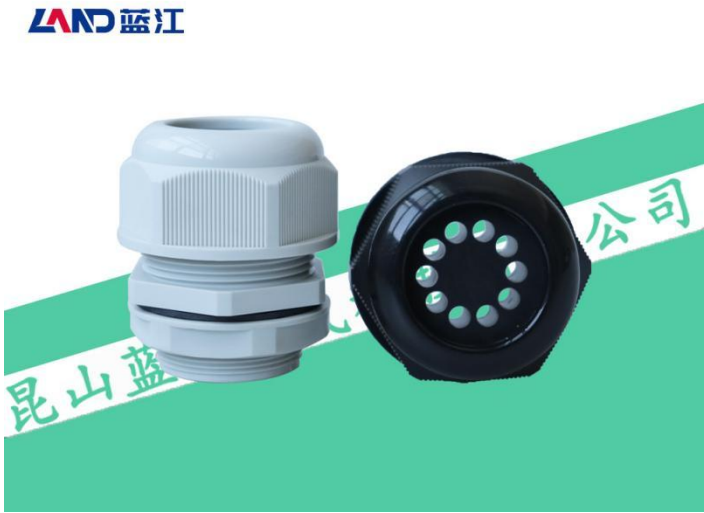

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

十孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	φ mm	φ mm	GL mm	nut/cap mm	PCS
MG40A-H10-05	M40×1.5	3～5	40	20	50/50	10
PG36A-H10-05	PG36	3～5	47	15	57/50	10
G1-1/4A-H10-05	G1-1/4	3～5	41.9	16	51/50	10

连体多孔尼龙电缆防水接头

Integrated multi hole nylon cable gland

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: M, PG, G(PF), NPT

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

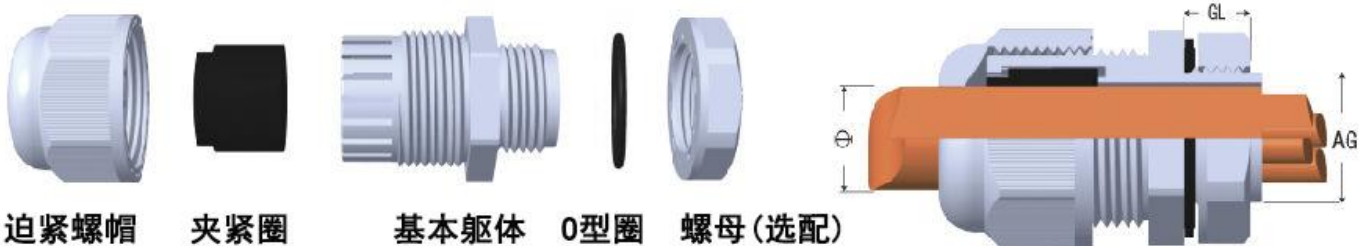

产品参数表M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG16B-H2-04	M16×1.5	1.5~4	16	10	22/22	50
MG16BL-H2-04	M16×1.5	1.5~4	16	15	22/22	50
MG18B-H2-04	M18×1.5	1.5~4	18	10	24/22	50
MG18BL-H2-04	M18×1.5	1.5~4	18	15	24/22	50
MG20BM-H2-04	M20×1.5	1.5~4	20	10	27/22	50
MG20BS-H2-5.3	M20×1.5	2~5.3	20	10	27/24	50
MG20BSL-H2-5.3	M20×1.5	2~5.3	20	15	27/24	50
MG20B-H2-06	M20×1.5	3~6	20	10	27/27	50
MG20B-H3-06	M20×1.5	3~6	20	10	27/27	50
MG20B-H4-05	M20×1.5	2~5.5	20	10	27/27	50
MG20BL-H2-06	M20×1.5	3~6	20	15	27/27	50
MG20BL-H3-06	M20×1.5	3~6	20	15	27/27	50
MG20BL-H4-05	M20×1.5	2~5.5	20	15	27/27	50
MG22B-H2-06	M22×1.5	3~6	22	10	30/27	50
MG22B-H3-06	M22×1.5	3~6	22	10	30/27	50
MG22B-H4-05	M22×1.5	2~5.5	22	10	30/27	50
MG24B-H2-06	M24×1.5	3~6	24	10	30/27	50
MG24B-H3-06	M24×1.5	3~6	24	10	30/27	50
MG24B-H4-05	M24×1.5	2~5.5	24	10	30/27	50
MG25SB-H2-06	M25×1.5	3~6	25	10	33/27	50
MG25SB-H3-06	M25×1.5	3~6	22	10	33/27	50
MG25SB-H4-05	M25×1.5	2~5.5	25	10	33/27	50
MG25B-H2-06	M25×1.5	3~6	25	10	33/27	50
MG25B-H6-05	M25×1.5	3~5	25	10	33/27	50
MG25BL-H2-06	M25×1.5	3~6	25	15	33/33	50
MG25BL-H6-05	M25×1.5	3~5	25	15	33/33	50
MG32BS-H2-06	M32×1.5	3~6	32	10	41/33	50
MG32BS-H6-05	M32×1.5	3~5	32	10	41/33	50
MG40B-H5-08	M40×1.5	4~8	40	15	50/52	10
MG40B-H6-08	M40×1.5	4~8	40	15	50/52	10

产品参数表PG/G/NPT

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG11B-H2-04	PG11	1.5-4	18.6	10	24/22	50
PG11BL-H2-04	PG11	1.5-4	18.6	15	24/22	50
PG13.5B-H2-5.3	PG13.5	2-5.3	20.4	10	27/24	50
PG13.5BL-H2-5.3	PG13.5	2-5.3	20.4	15	27/24	50
PG16B-H2-06	PG16	3-6	22.5	10.8	30/27	50
PG16B-H3-06	PG16	3-6	22.5	10.8	30/27	50
PG16B-H4-05	PG16	2-5.5	22.5	10.8	30/27	50
PG16BL-H2-06	PG16	3-6	22.5	15	30/27	50
PG16BL-H3-06	PG16	3-6	22.5	15	30/27	50
PG16BL-H4-05	PG16	2-5.5	22.5	15	30/27	50
PG19B-H2-06	PG19	3-6	23.8	10.8	30/27	50
PG19B-H3-06	PG19	3-6	23.8	10.8	30/27	50
PG19B-H4-05	PG19	2-5.5	23.8	10.8	30/27	50
PG21B-H2-06	PG21	3-6	28.3	12	36/33	50
PG21BL-H2-06	PG21	3-6	28.3	15	36/33	50
PG36B-H5-08	PG36	4-8	47	15	57/52	50
PG36B-H6-08	PG36	4-8	47	15	57/52	50
G3/8B-H2-04	G3/8	1.5-4	16.66	10	22/22	50
G1/2B-H2-5.3	G1/2	1.5-4	20.95	10	27/24	50
G3/4B-H2-06	G3/4	1.5-4	26.44	12	27/33	50
G1 1/4B-H5-08	G1-1/4	4-8	41.91	15	57/52	10
G1 1/4B-H6-08	G1-1/4	4-8	41.91	15	57/52	10
NPT3/8B-H2-04	NPT3/8	1.5-4	16.66	10	22	50
NPT1/2B-H2-06	NPT1/2	3-6	20.95	10	24	50
NPT3/4B-H2-06	NPT3/4	3-6	26.44	12	33	50
NPT1 1/4B-H5-08	NPT1-1/4	4-8	41.91	15	52	10
NPT1 1/4B-H6-08	NPT1-1/4	4-8	41.91	15	52	10

B型-防折弯尼龙电缆接头

B-type Stress relief Nylon cable gland

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2


温度测试：-40℃～105℃，短时可达120℃

产品特性：防折耐扭护线设计，可有效保护电缆折弯

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江

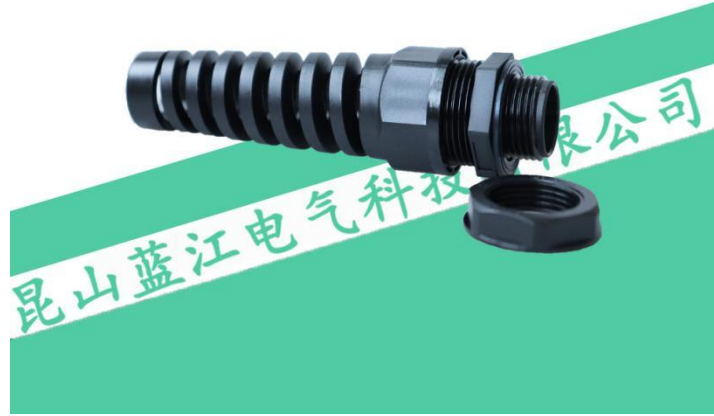

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time


Product features: Stress relief wire protection design can effectively protect cable bends

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



防折弯螺帽 密封圈 基本主体 垫片 螺母

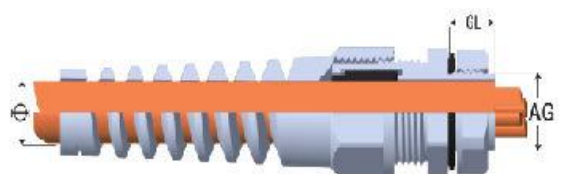

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG10B-P-06	M10×1.5	3~6	10	8	15/12	50
MG12B-P-08	M12×1.5	4~8	12	8.5	18/19	50
MG12B-P-05	M12×1.5	3~5	12	8.5	18/19	50
MG12BL-P-08	M12×1.5	4~8	12	15	18/19	50
MG12BL-P-05	M12×1.5	3~5	12	15	18/19	50
MG12BS-P-07	M12×1.5	3~6.5	12	8.5	18/15	50
MG12BSL-P-07	M12×1.5	3~6.5	12	15	18/15	50
MG14B-P-08	M14×1.5	4~8	12	8.5	18/19	50
MG16B-P-10	M16×1.5	6~10	16	10	22/22	50
MG16B-P-07	M16×1.5	4~7	16	10	22/22	50
MG16BL-P-10	M16×1.5	6~10	16	15	22/22	50
MG16BL-P-07	M16×1.5	4~7	16	15	22/22	50
MG16BS-P-08	M16×1.5	4~8	16	10	22/19	50
MG16BSL-P-08	M16×1.5	4~8	16	15	22/19	50
MG18B-P-10	M18×1.5	6~10	18	10	24/22	50
MG18BL-P-10	M18×1.5	6~10	18	15	24/22	50
MG20B-P-14	M20×1.5	8~14	20	10	27/27	50
MG20BL-P-14	M20×1.5	8~14	20	15	27/27	50
MG20BS-P-12	M20×1.5	6~12	20	10	27/24	50
MG20BS-P-09	M20×1.5	5~9	20	10	27/24	50
MG20BSL-P-12	M20×1.5	6~12	20	15	27/24	50
MG20BSL-P-09	M20×1.5	5~9	20	15	27/24	50
MG20BM-P-10	M20×1.5	6~10	20	10	27/22	50
MG20BM-P-07	M20×1.5	4~7	20	10	27/22	50
MG22B-P-14	M22×1.5	8~14	22	10	29/27	50
MG24B-P-14	M24×1.5	8~14	24	10	29/27	50
MG25B-P-18	M25×1.5	13~18	25	12	33/33	20
MG25BL-P-18	M25×1.5	13~18	25	15	33/33	20
MG25BS-P-14	M25×1.5	8~14	25	12	33/27	20
MG27B-P-18	M27×1.5	13~18	27	15	34/33	20
MG32B-P-25	M32×1.5	18~25	32	15	41/41	20
MG32BS-P-18	M32×1.5	13~18	32	15	41/33	20
MG36B-P-25	M36×1.5	18~25	36	12	45/41	10
MG40BS-P-25	M40×1.5	18~25	40	20	50/41	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7B-P-08	PG7	4~8	12.5	8.5	17/19	50
PG7B-P-05	PG7	3~5	12.5	8.5	17/19	50
PG7BL-P-08	PG7	4~8	12.5	15	17/19	50
PG7BL-P-05	PG7	3~5	12.5	15	17/19	50
PG7BS-P-07	PG7	3~6.5	12.5	8.5	17/15	50
PG7BSL-P-07	PG7	3~6.5	12.5	15	17/15	50
PG9B-P-08	PG9	4~8	15.2	8.5	22/19	50
PG9B-P-05	PG9	3~5	15.2	8.5	22/19	50
PG9BL-P-08	PG9	4~8	15.2	15	22/19	50
PG9BL-P-05	PG9	3~5	15.2	15	22/19	50
PG11B-P-10	PG11	6~10	18.6	10	22/22	50
PG11B-P-07	PG11	4~7	18.6	10	22/22	50
PG11BL-P-10	PG11	6~10	18.6	15	22/22	50
PG11B-P-07	PG11	4~7	18.6	15	22/22	50
PG13.5B-P-12	PG13.5	6~12	20.4	10	27/24	50
PG13.5B-P-09	PG13.5	5~9	20.4	10	27/24	50
PG13.5BL-P-12	PG13.5	6~12	20.4	15	27/24	50
PG16B-P-14	PG16	8~14	22.5	11	30/27	50
PG16BL-P-14	PG16	8~14	22.4	15	30/27	50
PG19B-P-14	PG19	8~14	23.8	11	30/27	50
PG21B-P-18	PG21	13~18	28.3	12	36/33	20
PG21BL-P-18	PG21	13~18	28.3	15	36/33	20
PG29B-P-25	PG29	18~25	37	12	46/41	20
PG29BL-P-25	PG29	18~25	37	15	46/41	20
G1/4B-P-08	G1/4	4~8	13.15	8.5	19/19	50
G3/8B-P-10	G3/8	6~10	16.66	10	22/22	50
G1/2B-P-12	G1/2	6~12	20.95	10	27/24	50
G3/4B-P-18	G3/4	13~18	26.44	12	33/33	20
G1B-P-25	G1	18~25	33.2	13.5	42/41	20
NPT1/4B-P-08	NPT1/4	4~8	13.15	8.5	19/19	50
NPT3/8B-P-10	NPT3/8	6~10	16.66	10	22	50
NPT1/2B-P-12	NPT1/2	6~12	20.95	10	27	50
NPT3/4B-P-18	NPT3/4	13~18	26.44	15	33	20
NPT1B-P-25	NPT1	18~25	33.5	17	41	20

A型-防折弯尼龙电缆接头

B-type Stress relief Nylon cable gland

产品材料： 尼龙PA6

螺纹规格： M牙， PG牙， G(PF)牙

产品颜色： 黑色（RAL9005），灰白色(RAL7035)

产品特性： 符合CE， ROHS2.0， IP68、 UL94V-2

温度测试： -40℃～105℃， 短时可达120℃

产品特性： 防折耐扭护线设计， 可有效保护电缆折弯

应用场景： 电气， 船舶， 电机， 照明， 机械， 轨道交通

订购说明： 默认配扁垫片与螺母， 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、 UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Stress relief wire protection design can effectively protect cable bends

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-P-08	M12×1.5	12	4~8	8.5	18/19	50
MG12A-P-08	M12×1.5	12	3~5	8.5	18/19	50
MG16A-P-10	M16×1.5	16	6~10	15	22/22	50
MG16A-P-07	M16×1.5	16	4~7	15	22/22	50
MG16AS-P-08	M16×1.5	16	4~8	15	22/19	50
MG20A-P-14	M20×1.5	20	8~14	15	27/27	50
MG20A-P-11	M20×1.5	20	6~11	15	27/27	50
MG20A-P-09	M20×1.5	20	5~9	15	27/27	50
MG20AS-P-12	M20×1.5	20	6~12	10	27/24	50
MG20AS-P-09	M20×1.5	20	5~9	10	27/24	50
MG22A-P-14	M22×1.5	22	8~14	10	29/27	50
MG25A-P-18	M25×1.5	25	13~18	15	33/33	20
MG25A-P-13	M25×1.5	25	8~13	15	33/33	20
MG25A-P-08	M25×1.5	25	4~8	15	33/33	20
MG25AS-P-14	M25×1.5	25	8~14	12	33/27	20
MG25AS-P-10	M25×1.5	25	6~10	12	33/27	20
MG32A-P-25	M32×1.5	32	18~25	15	41/41	20
MG32A-P-22	M32×1.5	32	16~22	15	41/41	20
PG7A-P-08	PG7	12.5	4~8	8.5	17/19	50
PG7A-P-05	PG7	12.5	3~5	8.5	17/19	50
PG9A-P-08	PG9	15.2	4~8	8.5	22/19	50
PG9A-P-05	PG9	15.2	3~5	8.5	22/19	50
PG11A-P-10	PG11	18.6	6~10	10	22/22	50
PG11A-P-07	PG11	18.6	4~7	10	22/22	50
PG13.5A-P-12	PG13.5	20.4	6~12	10	27/24	50
PG13.5A-P-09	PG13.5	20.4	5~9	10	27/24	50
PG16A-P-14	PG16	22.5	8~14	11	30/27	50
PG21A-P-18	PG21	28.3	13~18	12	36/33	20
PG29A-P-25	PG29	37	18~25	12	46/41	20
G1/4A-P-08	G1/4	13.15	4~8	8.5	19/19	50
G3/8A-P-10	G3/8	16.66	6~10	15	22/22	50
G1/2A-P-12	G1/2	20.95	6~12	10	27/24	50
G1/2AL-P-14	G1/2	20.95	8~14	15	30/27	50
G3/4A-P-18	G3/4	26.66	13~18	15	33/33	20
G1A-P-25	G1	33.2	18~25	13.5	42/41	20

90度弯角尼龙防水接头

90 degree angled nylon cable gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)

产品颜色: 黑色 (RAL9005), 灰白色 (RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 90度弯角设计, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: M/PG/G(PF)

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: CE, ROHS2.0, IP68、UL94V-2


Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in

a short period of time

Product features: 90 degree bend angle, waterproof IP68

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

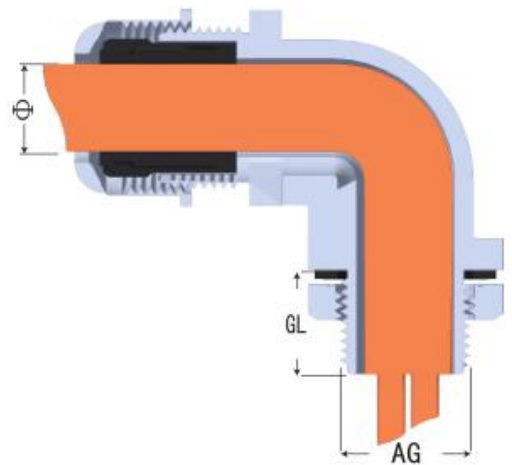

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-E-08	M12×1.5	12	4~8	8	17/16	50
MG12A-E-05	M12×1.5	12	3~5	8	17/16	50
MG12A-E-03	M12×1.5	12	1.5~3	8	17/16	50
MG16A-E-10	M16×1.5	16	6~10	10	22/22	50
MG16A-E-07	M16×1.5	16	4~7	10	22/22	50
MG16A-E-05	M16×1.5	16	3~5	10	22/22	50
MG16A-E-04	M16×1.5	16	2~4	10	22/22	50
MG20A-E-14	M20×1.5	20	8~14	15	27/27	50
MG20A-E-11	M20×1.5	20	6~11	15	27/27	50
MG20A-E-09	M20×1.5	20	5~9	15	27/27	50
MG25A-E-18	M25×1.5	25	13~18	15	33/33	20
MG25A-E-16	M25×1.5	25	10~16	15	33/33	20
MG25A-E-14	M25×1.5	25	8~14	15	33/33	20
MG25A-E-10	M25×1.5	25	6~10	15	33/33	20
MG32A-E-25	M32×1.5	32	18~25	15	41/41	20
MG32A-E-22	M32×1.5	32	16~22	15	41/41	20
MG40A-E-31	M40×1.5	40	24~31	20	50/55	10
MG40A-E-25	M40×1.5	40	18~25	20	55/55	10
PG7B-E-06	PG7	12.5	3~6	8	19/16	50
PG9B-E-08	PG9	15.2	4~8	8	22/19	50
PG11B-E-10	PG11	18.6	6~10	9	24/22	50
PG13.5B-E-12	PG13.5	20.4	6~12	9	27/24	50
PG16B-E-14	PG16	22.5	8~14	10	30/27	50
PG21B-E-18	PG21	28.3	13~18	12	33/33	20
PG29B-E-25	PG29	37	18~25	12	41/41	20
G1/2A-E-11	G1/2	20.95	6~11	15	27/27	50
G1/2A-E-14	G1/2	20.95	8~14	15	27/27	50

弧角90度弯角尼龙防水接头

90 degree curved nylon waterproof cable gland

产品材料：尼龙PA6

螺纹规格：公制M牙

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：90度弧度弯角设计，穿线更便捷

订购说明：默认配扁垫片与螺母，无需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree curved angle design, making threading more convenient

Ordering instructions: Default flat washer and nut, no need to specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-HE-08	M12×1.5	4～8	12	10	22/22	50
MG12A-HE-05	M12×1.5	3～5	12	10	22/22	50
MG16A-HE-10	M16×1.5	6～10	16	10	22/22	50
MG16A-HE-07	M16×1.5	4～7	16	10	22/22	50
MG20A-HE-14	M20×1.5	8～14	20	15	27/27	50
MG20A-HE-11	M20×1.5	6～11	20	15	27/27	50
MG25A-HE-18	M25×1.5	13～18	25	15	33/33	20
MG25A-HE-16	M25×1.5	10～16	25	15	33/33	20
MG32A-HE-25	M32×1.5	18～25	32	15	41/42	10
MG32A-HE-22	M32×1.5	16～22	32	15	41/42	10
MG40A-HE-32	M40×1.5	24～32	40	20	50/52	10
MG40A-HE-25	M40×1.5	18～25	40	20	50/52	10

90度-弯角防折弯尼龙防水接头

90 degree stress relief cable gland elbow

产品材料：尼龙PA6

产品特性：符合CE， ROHS2.0， IP68、 UL94V-2

温度测试：-40℃～105℃， 短时可达120℃

产品特性：90度弯角应力缓释设计， 可有效保护电缆

订购说明：默认配扁垫片与螺母， 无需请说明

Product Material: Nylon PA6

Thread specification: M/PG/G(PF)

Product features: Compliant with CE, ROHS2.0, IP68、 UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree bending angle stress relief design can effectively protect cables

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	主体高度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Thread length	Body height	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	H mm	nut/cap mm	PCS
MG12A-E-P-08	M12×1.5	4～8	8	28	17/16	50
MG12A-E-P-05	M12×1.5	3～5	8	28	17/16	50
MG16A-E-P-10	M16×1.5	6～10	10	38	22/22	50
MG16A-E-P-07	M16×1.5	4～7	10	38	22/22	50
MG20A-E-P-14	M20×1.5	8～14	15	50	27/27	20
MG20A-E-P-11	M20×1.5	6～11	15	50	27/27	20
MG25A-E-P-18	M25×1.5	13～18	15	57	33/33	10
MG25A-E-P-16	M25×1.5	10～16	15	57	33/33	10
MG25A-E-P-14	M25×1.5	8～14	15	57	33/33	10
MG25A-E-P-10	M25×1.5	6～10	15	57	33/33	10
MG32A-E-P-25	M32×1.5	18～25	15	66	41/41	10
MG32A-E-P-22	M32×1.5	16～22	15	66	41/41	10

90度-弧度弯角防折弯尼龙防水接头

90 degree stress relief cable gland elbow

产品材料：尼龙PA6



产品特性：符合CE， ROHS2.0， IP68、 UL94V-2

温度测试：-40℃～105℃， 短时可达120℃

设计特点：90度弯角应力缓释设计， 可有效保护电缆

订购说明：默认配扁垫片与螺母， 无需请说明



Product Material: Nylon PA6

Product features: Compliant with CE, ROHS2.0, IP68、 UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree bending angle stress relief design can effectively protect cables

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

·产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-HE-P-08	M12×1.5	4～8	12	10	22/22	50
MG12A-HE-P-05	M12×1.5	3～5	12	10	22/22	50
MG16A-HE-P-10	M16×1.5	6～10	16	10	22/22	50
MG16A-HE-P-07	M16×1.5	4～7	16	10	22/22	50
MG20A-HE-P-14	M20×1.5	8～14	20	15	27/27	20
MG20A-HE-P-11	M20×1.5	6～11	20	15	27/27	20
MG25A-HE-P-18	M25×1.5	13～18	25	15	33/33	10
MG25A-HE-P-16	M25×1.5	10～16	25	15	33/33	10
MG25A-HE-P-14	M25×1.5	8～14	25	15	33/33	10
MG25A-HE-P-10	M25×1.5	6～10	25	15	33/33	10
MG32A-HE-P-25	M32×1.5	18～25	32	15	41/42	10
MG32A-HE-P-22	M32×1.5	16～22	32	15	41/42	10

标准内螺纹电缆防水接头

Conventional internal thread cable galnd

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

设计特点: 内螺纹设计, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, PG-thread


Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Internal thread design, high protection level, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

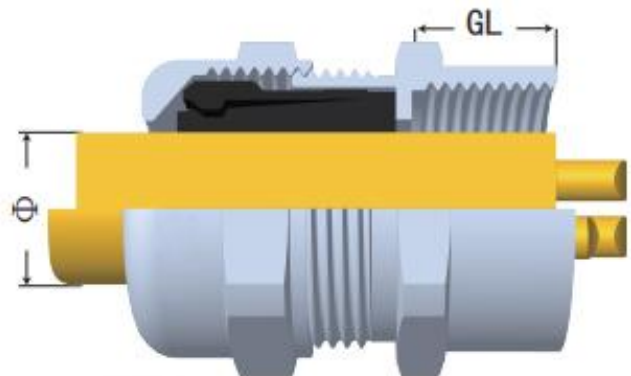

产品参数表

蓝江产品型号	螺纹规格	电缆范围	内螺纹深度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG16AF-08	M16×1.5	4~8	13	18/19	50
MG16AF-05	M16×1.5	3~5.5	13	18/19	50
MG16AF-03	M16×1.5	2~3	13	18/19	50
MG20AF-10	M20×1.5	6~10	14	22/22	50
MG20AF-07	M20×1.5	4~7	14	22/22	50
MG20AF-05	M20×1.5	3~5	14	22/22	50
MG20AF-04	M20×1.5	2~4	14	22/22	50
MG20AF-14	M20×1.5	8~14	14	27/27	50
MG20AF-12	M20×1.5	6~12	14	27/27	50
MG20AF-14	M20×1.5	8~14	14	27/27	50
MG20AF-06	M20×1.5	3~6	14	27/27	50
MG25AF-17	M25×1.5	13~17	15	33/33	50
MG25AF-16	M25×1.5	11~16	15	33/33	50
MG25AF-14	M25×1.5	8~14	14	33/33	50
MG25AF-10	M25×1.5	6~10	14	33/33	50
MG25AF-08	M25×1.5	4~8	14	33/33	50
MG25AF-06	M25×1.5	3~6	14	33/33	50
G1/2AF-14	G1/2	8~14	14	27/27	50
G1/2AF-11	G1/2	6~12	14	27/27	50
G3/4AF-17	G3/4	13~17	16	33/33	50
G3/4AF-16	G3/4	11~16	16	33/33	50
G3/4AF-14	G3/4	8~14	16	33/33	50
G3/4AF-10	G3/4	6~10	16	33/33	50
G3/4AF-08	G3/4	4~8	16	33/33	50
G3/4AF-06	G3/4	3~6	16	33/33	50

加长内螺纹尼龙防水接头

Extended internal thread nylon cable gland

产品材料：尼龙PA6

螺纹规格：公制M牙

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

设计特点：加长内螺纹设计，防护等级高，抗拉力强



Product Material: Nylon PA6

Thread specification: M thread

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Extended internal thread design, high protection level, strong tensile strength

·产品参数表

蓝江产品型号	螺纹规格	电缆范围	内螺纹深度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG20LF-10	M20×1.5	6～10	17	22/22	50
MG20LF-07	M20×1.5	4～7	17	22/22	50
MG25LF-14	M25×1.5	8～14	17	27/27	50
MG25LF-12	M25×1.5	7～12	17	27/27	50

耐高温尼龙电缆防水接头

High temperature nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68

温度测试: -20°C~180°C, 短时可达220°C

设计特点: 本产品采用改性硅橡胶制成, 具有耐高温, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认配螺母与平垫, 如无需请另外说明

LAND 蓝江



Product materials: Nylon 6

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: This product is made of modified silicone rubber, which has the characteristics of high temperature resistance, high protection level, and strong tensile strength.

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Equipped with nuts and waterproof pads,

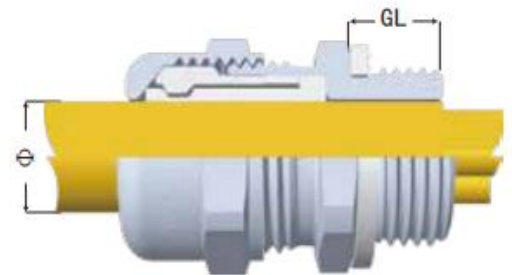

产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-HT	M12×1.5	4~8	12	8.5	18/19	50
MG16AS-08-HT	M16×1.5	4~8	16	10	22/19	50
MG16A-10-HT	M16×1.5	6~10	16	15	22/22	50
MG20A-14-HT	M20×1.5	8~14	20	15	27/27	50
MG20A-12-HT	M20×1.5	6~12	20	10	27/27	50
MG22A-14-HT	M22×1.5	8~14	22	10	29/27	50
MG25AS-14-HT	M25×1.5	8~14	25	10	33/27	50
MG25A-18-HT	M25×1.5	13~18	25	15	33/33	50
MG25A-16-HT	M25×1.5	10~16	25	15	33/33	50
MG32A-25-HT	M32×1.5	18~25	32	15	41/41	20
MG32A-22-HT	M32×1.5	16~22	32	15	41/41	20
MG40A-32-HT	M40×1.5	24~32	40	20	50/50	10
MG50A-41-HT	M50×1.5	31~41	50	22	62/62	10
MG63A-51-HT	M63×1.5	44~51	63	25	75/78	10
PG7A-08-HT	PG7	4~8	12.5	8.5	17/19	50
PG9A-08-HT	PG9	4~8	15.2	8.5	22/19	50
PG11A-10-HT	PG11	6~10	18.6	10	22/22	50
PG13.5A-12-HT	PG13.5	6~12	20.4	10	27/24	50
PG16A-14-HT	PG16	8~14	22.5	11	30/27	50
PG21A-18-HT	PG21	13~18	28.3	12	36/33	50
PG29A-25-HT	PG29	18~25	37	12	46/41	20
PG36A-31-HT	PG36	24~31	47	15	57/50	10
PG42A-41-HT	PG42	31~41	54	15.5	64/62	10
PG48A-51-HT	PG48	44~51	59.3	16	75/78	10
G1/4A-08-HT	G1/4	4~8	13.15	8.5	19/19	50
G3/8A-10-HT	G3/8	6~10	16.66	15	22/22	50
G1/2A-12-HT	G1/2	6~12	20.95	10	27/24	50
G1/2AL-14-HT	G1/2	8~14	20.95	15	30/27	50
G3/4A-18-HT	G3/4	13~18	26.44	15	33/33	50
G3/4A-16-HT	G3/4	10~16	26.44	15	33/33	50
G1A-25-HT	G1	18~25	33.2	15	42/41	20
G1-1/4A-31-HT	G1-1/4	24~31	41.9	16	51/50	10
G1-1/2A-41-HT	G1-1/2	31~41	47.8	22	62/62	10
G2A-51-HT	G2	44~51	59.6	25	75/75	10

阻燃尼龙电缆防水接头

Flame retardant nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-0

温度测试: -40℃~105℃, 短时可达120℃

设计特点: 本产品采用改性阻燃橡胶制成, 具有防火阻燃, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认配螺母与平垫, 如无需请另外说明

LAND 蓝江



Product materials: PA6

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of modified flame-retardant rubber, which has the characteristics of fire resistance, high protection level, and strong tensile strength.

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Equipped with nuts and waterproof pads,



产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG mm	GL mm	nut/cap mm	PCS
MG12A-08-V0	M12×1.5	4~8	12	8.5	18/19	50
MG16AS-08-V0	M16×1.5	4~8	16	10	22/19	50
MG16A-10-V0	M16×1.5	6~10	16	15	22/22	50
MG20A-14-V0	M20×1.5	8~14	20	15	27/27	50
MG20A-12-V0	M20×1.5	6~12	20	10	27/24	50
MG22A-14-V0	M22×1.5	8~14	22	10	29/27	50
MG25AS-14-V0	M25×1.5	8~14	25	10	33/27	50
MG25A-18-V0	M25×1.5	13~18	25	15	33/33	50
MG25A-16-V0	M25×1.5	10~16	25	15	33/33	50
MG32A-25-V0	M32×1.5	18~25	32	15	41/41	20
MG32A-22-V0	M32×1.5	16~22	32	15	41/41	10
MG40A-31-V0	M40×1.5	24~31	40	20	50/50	10
MG50A-41-V0	M50×1.5	31~41	50	22	62/62	10
MG63A-51-V0	M63×1.5	44~51	63	25	75/78	10
PG7A-08-V0	PG7	4~8	12.5	8.5	17/19	50
PG9A-08-V0	PG9	4~8	15.2	8.5	22/19	50
PG11A-10-V0	PG11	6~10	18.6	10	22/22	50
PG13.5A-12-V0	PG13.5	6~12	20.4	10	27/24	50
PG16A-14-V0	PG16	8~14	22.5	11	30/27	50
PG21A-18-V0	PG21	13~18	28.3	12	36/33	50
PG21A-16-V0	PG21	10~16	28.3	12	36/33	50
PG29A-25-V0	PG29	18~25	37	12	46/41	20
PG36A-31-V0	PG36	24~32	47	15	57/50	10
PG42A-41-V0	PG42	31~41	54	15.5	64/62	10
PG48A-51-V0	PG48	44~51	59.3	16	75/78	10
G1/4A-08-V0	G1/4	4~8	13.15	8.5	19/19	50
G3/8A-10-V0	G3/8	6~10	16.66	15	22/22	50
G1/2A-12-V0	G1/2	6~12	20.95	10	27/24	50
G1/2AL-14-V0	G1/2	8~14	20.95	15	30/27	50
G3/4A-18-V0	G3/4	13~18	26.44	15	33/33	50
G3/4A-16-V0	G3/4	10~16	26.44	15	33/33	50
G1A-25-V0	G1	18~25	33.2	15	42/41	20
G1-1/4A-32-V0	G1-1/4	24~32	41.9	16	51/50	10
G1-1/2A-41-V0	G1-1/2	31~41	47.8	22	62/62	10
G2A-51-V0	G2	44~51	59.6	25	75/75	10