

标准铝制防水接头

Standard Aluminum cable gland

材料: 6061铝, 密封件EPDM, 夹紧爪尼龙


检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片

LAND 蓝江

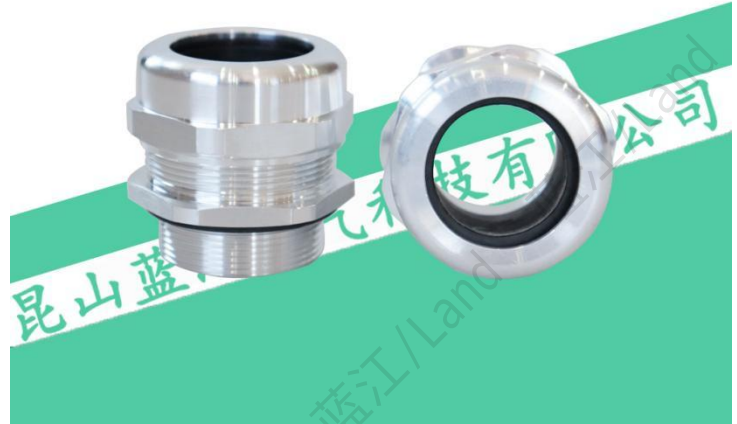

Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, Dustproof and surface treatment can choose between primary color or blackening treatment, with a beautiful appearance Observation, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

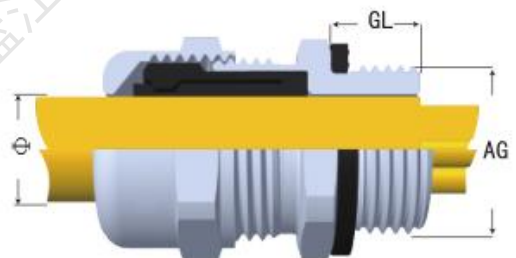

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-08-AL	M12×1.5(1)	12	4~8	9	15/17	50
MG12-05-AL	M12×1.5(1)	12	3~5.5	9	15/17	50
MG14-08-AL	M14×1.5	14	4~8	9	17/17	50
MG14-05-AL	M14×1.5	14	3~5.5	9	17/17	50
MG16-10-AL	M16×1.5(1)	16	6~10	9.5	20/21	50
MG16-07-AL	M16×1.5(1)	16	4~7	9.5	20/21	50
MG18-10-AL	M18×1.5	18	6~10	9.5	21/21	50
MG18-07-AL	M18×1.5	18	4~7	9.5	21/21	50
MG20-14-AL	M20×1.5	20	8~14	12	24/26	50
MG20-11-AL	M20×1.5	20	7~11	12	24/26	50
MG20-09-AL	M20×1.5	20	5~9	12	24/26	50
MG20-06-AL	M20×1.5	20	3~6.5	12	24/26	50
MG20S-12-AL	M20×1.5	20	7~12	12	24/24	50
MG20S-11-AL	M20×1.5	20	6~11	12	24/24	50
MG20S-09-AL	M20×1.5	20	5~9	12	24/24	50
MG22-14-AL	M22×1.5	22	8~14	12	26/26	50
MG24-14-AL	M24×1.5	24	8~14	10.5	28/26	50
MG25-18-AL	M25×1.5	25	13~18	12	30/31	50
MG25-16-AL	M25×1.5	25	12~16	12	30/31	50
MG25-14-AL	M25×1.5	25	8~14	12	30/31	50
MG25-10-AL	M25×1.5	25	6~10	12	30/31	50
MG25-08-AL	M25×1.5	25	4~8	12	30/31	50
MG27-18-AL	M27×1.5(2)	27	13~18	12	30/31	50
MG30-18-AL	M30×1.5(2)	30	13~18	12.5	34/31	50
MG32-25-AL	M32×1.5	32	18~25	12.5	38/40	20
MG32-22-AL	M32×1.5	32	16~22	12.5	38/40	20
MG36-25-AL	M36×1.5(2)	36	18~25	13	42/40	20
MG40-31-AL	M40×1.5(2)	40	25~31	14	48/50	10
MG40-25-AL	M40×1.5(2)	40	18~25	14	48/50	10
MG42-31-AL	M42×2.0	42	25~31	15	48/50	10
MG48-31-AL	M48×2.0	48	25~31	15	58/50	10
MG50-41-AL	M50×1.5	50	33~41	15	58/60	10
MG50-33-AL	M50×1.5	50	25~33	15	58/60	10
MG63-54-AL	M63×1.5	63	46~54	15	71/76	10
MG63-46-AL	M63×1.5	63	38~46	15	71/76	10
MG63-35-AL	M63×1.5	63	28~35	15	71/76	10
MG63S-44-AL	M63×1.5	63	36~44	15	71/65	10

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG φ mm	mm	mm	nut/cap mm	PCS
PG7-08-AL	PG7	12.5	4~8	9	15/17	50
PG7-05-AL	PG7	12.5	3~5.5	9	15/17	50
PG7-03-AL	PG7	12.5	2~3.2	9	15/17	50
PG9-08-AL	PG9	15.2	4~8	9	17/17	50
PG9-05-AL	PG9	15.2	3~5.5	9	17/17	50
PG9-03-AL	PG9	15.2	2~3.2	9	17/17	50
PG11-10-AL	PG11	18.6	6~10	9.5	21/21	50
PG11-07-AL	PG11	18.6	4~7	9.5	21/21	50
PG11-05-AL	PG11	18.6	3~5	9.5	21/21	50
PG11-04-AL	PG11	18.6	2~4	9.5	21/21	50
PG13.5-12-AL	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-11-AL	PG13.5	20.4	6~11	10.5	24/24	50
PG13.5-09-AL	PG13.5	20.4	5~9	10.5	24/24	50
PG16-14-AL	PG16	22.5	8~14	12	26/26	50
PG16-11-AL	PG16	22.5	7~11	12	26/26	50
PG16-06-AL	PG16	22.5	3~6.5	12	26/26	50
PG19-14-AL	PG19	23.8	8~14	10.5	28/26	50
PG21-18-AL	PG21	28.3	13~18	12	32/31	50
PG21-16-AL	PG21	28.3	12~16	12	32/31	50
PG21-14-AL	PG21	28.3	8~14	12	32/31	50
PG21-10-AL	PG21	28.3	6~10	12	32/31	50
PG21-08-AL	PG21	28.3	4~8	12	32/31	50
PG21-06-AL	PG21	28.3	3~6	12	32/31	50
PG25-18-AL	PG25	29.8	13~18	12.5	34/31	50
PG29-25-AL	PG29	37	18~25	12.5	40/40	20
PG29-22-AL	PG29	37	17~22	12.5	40/40	20
PG36-31-AL	PG36	47	25~31	15	58/50	10
PG36-25-AL	PG36	47	18~25	15	58/50	10
PG42-41-AL	PG42	54	33~41	15	60/60	10
PG42-33-AL	PG42	54	25~33	15	60/60	10
PG48-44-AL	PG48	59.3	36~44	15	71/65	10
PG48-54-AL	PG48	59.3	44~54	15	71/76	10
PG63-54-AL	PG63	72	47~54	15	76/76	10

产品参数表/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G (PF)	AG Φ mm	mm	mm	nut/cap mm	PCS
G1/4-08-AL	G1/4	13.15	4~8	9	17/17	50
G1/4-05-AL	G1/4	13.15	3~5.5	9	17/17	50
G1/4-03-AL	G1/4	13.15	2~3.2	9	17/17	50
G3/8-10-AL	G3/8	16.66	6~10	9.5	21/21	50
G3/8-07-AL	G3/8	16.66	4~7	9.5	21/21	50
G3/8-05-AL	G3/8	16.66	3~5	9.5	21/21	50
G3/8-04-AL	G3/8	16.66	2~4.3	9.5	21/21	50
G1/2-14-AL	G1/2	20.99	8~14	12	24/26	50
G1/2-12-AL	G1/2	20.99	7~12	12	24/24	50
G1/2-11-AL	G1/2	20.99	6~11	12	24/24	50
G1/2-09-AL	G1/2	20.99	5~9	12	24/24	50
G3/4-18-AL	G3/4	26.44	13~18	12	30/31	50
G3/4-16-AL	G3/4	26.44	12~16	12	30/31	50
G3/4-14-AL	G3/4	26.44	8~14	12	30/31	50
G3/4-10-AL	G3/4	26.44	6~10	12	30/31	50
G3/4-08-AL	G3/4	26.44	4~8	12	30/31	50
G3/4-06-AL	G3/4	26.44	3~6	12	30/31	50
G1-25-AL	G1	33.25	18~25	15	38/40	20
G1-22-AL	G1	33.25	17~22	15	38/40	20
G1-1/4-31-AL	G1-1/4	41.91	25~31	15	48/50	10
G1-1/4-25-AL	G1-1/4	41.91	18~25	15	48/50	10
G1-1/2-31-AL	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-25-AL	G1-1/2	47.8	18~25	15	55/50	10
G1-1/2-41-AL	G1-1/2	47.8	33~41	15	55/60	10
G1-1/2-33-AL	G1-1/2	47.8	25~33	15	55/60	10
G2-44-AL	G2	59.61	36~44	15	71/65	1
G2-54-AL	G2	59.61	47~54	15	71/76	1
G2-46-AL	G2	59.61	40~46	15	71/76	1
G2-35-AL	G2	59.61	28~35	15	71/76	1
G2-1/2-66-AL	G2-1/2	75.18	60~66	15.5	80/85	1
G3-77-AL	G3	87.88	70~77	20	95/103	1

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	NPT	AG Φ mm	mm	mm	nut/cap mm	PCS
NPT1/4-08-AL	NPT1/4	13.15	4~8	9	17	50
NPT1/4-05-AL	NPT1/4	13.15	3~5.5	9	17	50
NPT1/4-03-AL	NPT1/4	13.15	2~3.2	9	17	50
NPT3/8-10-AL	NPT3/8	17.05	6~10	10	21	50
NPT3/8-07-AL	NPT3/8	17.05	4~7	10	21	50
NPT3/8-05-AL	NPT3/8	17.05	3~5	10	21	50
NPT3/8-04-AL	NPT3/8	17.05	2~4.3	10	21	50
NPT1/2-14-AL	NPT1/2	20.99	8~14	13	26	50
NPT1/2-12-AL	NPT1/2	20.99	7~12	11	24	50
NPT1/2-11-AL	NPT1/2	20.99	6~11	11	24	50
NPT1/2-09-AL	NPT1/2	20.99	5~9	11	24	50
NPT3/4-18-AL	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-AL	NPT3/4	26.56	12~16	13	31	50
NPT3/4-14-AL	NPT3/4	26.56	8~14	13	31	50
NPT3/4-10-AL	NPT3/4	26.56	6~10	13	31	50
NPT3/4-08-AL	NPT3/4	26.56	4~8	13	31	50
NPT3/4-06-AL	NPT3/4	26.56	3~6	13	31	50
NPT1-25-AL	NPT1	33.23	18~25	15	40	20
NPT1-22-AL	NPT1	33.23	17~22	15	40	20
NPT1-1/4-31-AL	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/4-25-AL	NPT1-1/4	41.98	18~25	15	50	10
NPT1-1/2-31-AL	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-25-AL	NPT1-1/2	48.05	18~25	15	50	10
NPT1-1/2-41-AL	NPT1-1/2	48.05	33~41	15	60	10
NPT1-1/2-33-AL	NPT1-1/2	48.05	25~33	15	60	10
NPT2-44-AL	NPT2	60.09	36~44	15	65	10
NPT2-54-AL	NPT2	60.09	44~54	15	76	10
NPT2-46-AL	NPT2	60.09	38~46	15	76	10
NPT2-35-AL	NPT2	60.09	28~35	15	76	10
NPT2-1/2-66-AL	NPT2-1/2	75.18	60~66	15.5	85	1
NPT3-77-AL	NPT3	87.88	70~77	20	103	1

扁孔铝制防水接头

Flat hole aluminum cable gland


材料: 6061铝, 密封件EPDM, 夹紧爪尼龙

检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 可以锁紧扁电缆与伴热带, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片

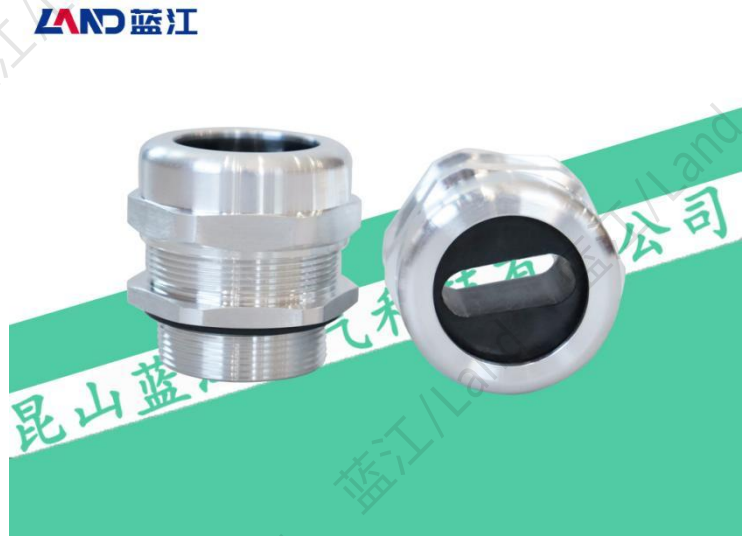


Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, dustproof, surface treatment can choose original color or blackening treatment, can lock flat cables and heat tracing belts, beautiful appearance, easy to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket

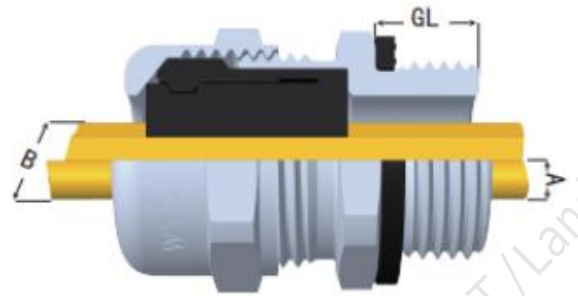

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG20S-0508-AL	M20×1.5	20	5*8	12	24/24	50
MG20S-0712-AL	M20×1.5	20	7*12	12	24/24	50
MG20-0410-AL	M20×1.5	20	4*10	12	24/26	50
MG20-0612-AL	M20×1.5	20	6*12	12	24/26	50
MG20-0814-AL	M20×1.5	20	8*14	12	24/26	50
MG22-0410-AL	M22×1.5	22	4*10	12	26/26	50
MG22-0612-AL	M22×1.5	22	6*12	12	26/26	50
MG22-0814-AL	M22×1.5	22	8*14	12	26/26	50
MG24-0410-AL	M24×1.5	24	4*10	10.5	28/26	50
MG24-0612-AL	M24×1.5	24	6*12	10.5	28/26	50
MG24-0814-AL	M24×1.5	24	8*14	10.5	28/26	50
MG25-0511-AL	M25×1.5	25	5*11	12	30/31	50
MG25-0614-AL	M25×1.5	25	7*14	12	30/31	50
MG32-0519-AL	M32×1.5	32	5*19	12.5	38/40	20
MG36-0519-AL	M36×1.5 (2)	36	5*19	13	42/40	20
MG40-1230-AL	M40×1.5	40	12*30	14	48/50	10
MG42-1230-AL	M42×2.0	42	12*30	15	48/50	10
MG48-1230-AL	M48×2.0	48	12*30	15	58/50	10
MG50-1334-AL	M50×1.5	50	13*34	15	58/60	10
MG63S-1641-AL	M63×1.5	63	16*41	15	71/65	10
MG63S-2044-AL	M63×1.5	63	20*44	15	71/76	10
MG63-2055-AL	M63×1.5	63	20*55	15	71/76	10
MG72-2055-AL	M72×2.0	72	20*55	15	80/75	2
PG13.5-0508-AL	PG13.5	20.4	5*8	10	24/24	50
PG13.5-0712-AL	PG13.5	20.4	7*12	10	24/24	50
PG16-0410-AL	PG16	22.5	4*10	11	26/26	50
PG16-0612-AL	PG16	22.5	6*12	11	26/26	50
PG16-0814-AL	PG16	22.5	8*14	11	26/26	50
PG21-0511-AL	PG21	28.3	5*11	12	32/31	50
PG21-0614-AL	PG21	28.3	7*14	12	32/31	50
PG29-0519-AL	PG29	37	5*19	12	40/40	20
PG36-1230-AL	PG36	47	12*30	15	58/50	10
PG42-1334-AL	PG42	54	13*34	15.5	60/60	10
PG48-1641-AL	PG48	59.3	16*41	15	71/65	10
PG48-2044-AL	PG48	59.3	20*44	15	71/65	10
PG48-2055-AL	PG48	59.3	20*55	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
G1/2-0508-AL	G1/2	20.95	5*8	12	24/24	50
G1/2-0712-AL	G1/2	20.95	7*12	12	24/24	50
G1/2D-0410-AL	G1/2	20.95	4*10	12	24/26	50
G1/2D-0612-AL	G1/2	20.95	6*12	12	24/26	50
G1/2D-0814-AL	G1/2	20.95	8*14	12	24/26	50
G3/4-0511-AL	G3/4	26.44	5*11	12	30/31	50
G3/4-0614-AL	G3/4	26.44	7*14	12	30/31	50
G1-0519-AL	G1	33.2	5*19	15	38/40	20
G1-1/4-1230-AL	G1-1/4	41.9	12*30	15	48/50	10
G1-1/2-1230-AL	G1-1/2	47.8	12*30	15	55/50	10
G1-1/2-1334-AL	G1-1/2	47.8	13*34	15	55/60	10
G2-1641-AL	G2	59.6	16*41	15	71/65	10
G2-2044-AL	G2	59.6	20*44	15	71/65	10
G2-2055-AL	G2	59.6	20*55	15	71/76	10
NPT1/2-0508-AL	NPT1/2	20.95	5*8	13	24	50
NPT1/2-0712-AL	NPT1/2	20.95	7*12	13	24	50
NPT1/2D-0410-AL	NPT1/2	20.95	4*10	13	26	50
NPT1/2D-0612-AL	NPT1/2	20.95	6*12	13	26	50
NPT1/2D-0814-AL	NPT1/2	20.95	8*14	13	26	50
NPT3/4-0511-AL	NPT3/4	26.44	5*11	13	31	50
NPT3/4-0614-AL	NPT3/4	26.44	7*14	13	31	50
NPT1-0519-AL	NPT1	33.2	5*19	15	40	20
NPT1-1/4-1230-AL	NPT1-1/4	41.9	12*30	15	50	10
NPT1-1/2-1230-AL	NPT1-1/2	47.8	12*30	15	50	10
NPT1-1/2-1334-AL	NPT1-1/2	47.8	13*34	15	60	10
NPT2-1641-AL	NPT2	59.6	16*41	15	65	10
NPT2-2044-AL	NPT2	59.6	20*44	15	65	10
NPT2-2055-AL	NPT2	59.6	20*55	15	76	10

多孔铝制防水接头

Multi holes aluminum cable gland

材料: 6061铝, 密封件EPDM, 夹紧爪尼龙

检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片

LAND 蓝江



Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, Dustproof and surface treatment can choose between primary color or blackening treatment, with a beautiful appearance Observation, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket



迫紧螺母



夹紧爪




夹紧圈



基本躯体



垫片

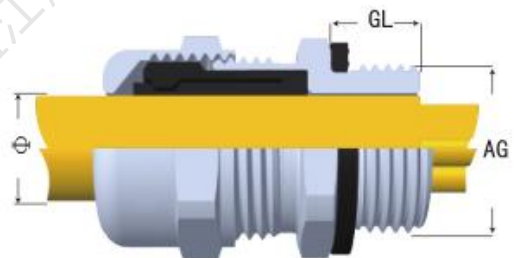

产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packing
PN.	Metric	mm	mm	nut/cap mm	Pcs/bag
MG12-H2-03-AL	M12×1.5	1.5~3	9	15/17	50
MG12-H3-02-AL	M12×1.5	1.5~2.6	9	15/17	50
MG12-H4-02-AL	M12×1.5	1.5~2.3	9	15/17	50
MG16-H2-04-AL	M16×1.5	2~4	9.5	20/21	50
MG16-H3-04-AL	M16×1.5	2~4	9.5	20/21	50
MG16-H4-03-AL	M16×1.5	1.6~3.2	9.5	20/21	50
MG16-H6-02-AL	M16×1.5	1.2~2.1	9.5	20/21	50
MG16-H8-02-AL	M16×1.5	1.2~2.1	9.5	20/21	50
MG20-H2-06-AL	M20×1.5	3~6	12	24/26	50
MG20-H3-05-AL	M20×1.5	3~5	12	24/26	50
MG20-H4-05-AL	M20×1.5	3~4.5	12	24/26	50
MG20-H5-04-AL	M20×1.5	2.5~4	12	24/26	50
MG20-H6-03-AL	M20×1.5	1.5~3	12	24/26	50
MG25-H2-08-AL	M25×1.5	5~8	12	30/31	50
MG25-H3-08-AL	M25×1.5	5~8	12	30/31	50
MG25-H4-07-AL	M25×1.5	5~7	12	30/31	50
MG25-H5-06-AL	M25×1.5	4~6	12	30/31	50
MG25-H6-05-AL	M25×1.5	3~5	12	30/31	50
MG25-H7-04-AL	M25×1.5	2.5~4	12	30/31	50
MG25-H8-04-AL	M25×1.5	2.5~4	12	30/31	50
MG32-H2-10-AL	M32×1.5	6~10	12.5	38/40	20
MG32-H3-10-AL	M32×1.5	6~10	12.5	38/40	20
MG32-H4-09-AL	M32×1.5	7~9	12.5	38/40	20
MG32-H4-07-AL	M32×1.5	5~7	12.5	38/40	20
MG32-H5-08-AL	M32×1.5	6~8	12.5	38/40	20
MG32-H6-07-AL	M32×1.5	5~7	12.5	38/40	20
MG32-H6-05-AL	M32×1.5	4~6	12.5	38/40	20
MG32-H7-06-AL	M32×1.5	3~5	12.5	38/40	20
MG32-H8-05-AL	M32×1.5	3~5	12.5	38/40	20

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packing
PN.	Metric	mm	mm	nut/cap mm	Pcs/bag
MG40-H2-13-AL	M40×1.5	9~13	14	48/50	10
MG40-H3-12-AL	M40×1.5	9~12	14	48/50	10
MG40-H4-12-AL	M40×1.5	9~12	14	48/50	10
MG40-H5-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H6-10-AL	M40×1.5	7~10	14	48/50	10
MG40-H6-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H7-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H8-06-AL	M40×1.5	4~6	14	48/50	10
MG40-H8-05-AL	M40×1.5	3~5	14	48/50	10
MG40-H9-05-AL	M40×1.5	3~5	14	48/50	10
MG40-H10-05-AL	M40×1.5	3~5	14	48/50	10
MG50-H2-15-AL	M50×1.5	11~15	15	58/60	10
MG50-H3-12-AL	M50×1.5	8~12	15	58/60	10
MG63-H2-17-AL	M63×1.5	14~17	15	71/76	10
MG63-H3-13-AL	M63×1.5	9~13	15	71/76	10
MG63-H6-12-AL	M63×1.5	9~12	15	71/76	10

屏蔽铝制防水接头

Shielded aluminum cable gland

材料: 6061铝, 防磁片为紫铜, 密封件尼龙与EPDM



检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 防电磁屏蔽, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片




Material: 6061 aluminum, anti magnetic sheet made of purple copper, sealing components made of nylon and EPDM

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, dustproof, surface treatment can choose original color or blackening treatment, anti electromagnetic shielding, beautiful appearance, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket

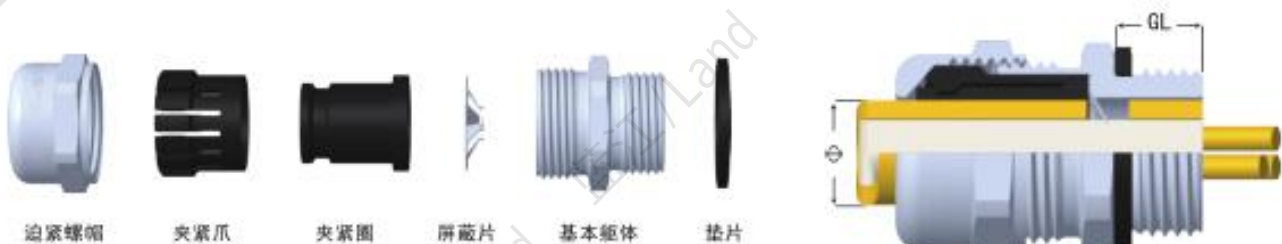

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG12-08-AL	M12×1.5	12	4~8	9	15/17	50
EMC-MG12-05-AL	M12×1.5	12	3~5	9	15/17	50
EMC-MG16-10-AL	M16×1.5	16	6~10	9.5	20/21	50
EMC-MG16-07-AL	M16×1.5	16	4~7	9.5	20/21	50
EMC-MG18-10-AL	M18×1.5	18	6~10	9.5	21/21	50
EMC-MG20S-12-AL	M20×1.5	20	7~12	12	24/24	50
EMC-MG20S-09-AL	M20×1.5	20	5~9	12	24/24	50
EMC-MG20-14-AL	M20×1.5	20	8~14	12	24/26	50
EMC-MG22-14-AL	M22×1.5	22	8~14	12	26/26	50
EMC-MG24-14-AL	M24×1.5	24	8~14	10.5	28/26	50
EMC-MG25-18-AL	M25×1.5	25	13~18	12	30/31	50
EMC-MG25-16-AL	M25×1.5	25	11~16	12	30/31	50
EMC-MG27-18-AL	M27×1.5 (2)	27	13~18	12	30/31	50
EMC-MG30-18-AL	M30×1.5 (2)	30	13~18	12.5	34/31	50
EMC-MG32-25-AL	M32×1.5	32	18~25	12.5	38/40	20
EMC-MG32-22-AL	M32×1.5	32	16~22	12.5	38/40	20
EMC-MG36-25-AL	M36×1.5 (2)	36	18~25	13	42/40	20
EMC-MG40-31-AL	M40×1.5	40	25~31	14	48/50	10
EMC-MG40-25-AL	M40×1.5	40	18~25	14	48/50	10
EMC-MG42-31-AL	M42×2.0	42	25~31	15	48/50	10
EMC-MG48-31-AL	M48×2.0	48	25~31	15	58/50	10
EMC-MG50-41-AL	M50×1.5	50	33~41	15	58/60	10
EMC-MG50-33-AL	M50×1.5	50	26~33	15	58/60	10
EMC-MG60-44-AL	M60×2.0	60	36~44	15	71/65	10
EMC-MG63-44-AL	M63×1.5	63	36~44	15	71/65	10
EMC-MG63-54-AL	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-PG7-08-AL	PG7	12.5	4~8	9	15/17	50
EMC-PG9-08-AL	PG9	15.2	4~8	9	17/17	50
EMC-PG11-10-AL	PG11	18.6	6~10	9.5	21/21	50
EMC-PG13.5-12-AL	PG13.5	20.4	7~12	10.5	24/24	50
EMC-PG16-14-AL	PG16	22.5	8~14	12	26/26	50
EMC-PG19-14-AL	PG19	22.5	8~14	10.5	28/26	50
EMC-PG21-18-AL	PG21	28.3	13~18	12	32/31	50
EMC-PG29-25-AL	PG29	37	18~25	12.5	40/40	20
EMC-PG36-31-AL	PG36	47	25~31	15	58/50	10
EMC-PG42-41-AL	PG42	54	33~41	15	60/60	10
EMC-PG48-44-AL	PG48	59.3	36~44	15	71/65	10
EMC-G1/4-08-AL	G1/4	13.15	4~8	9	17/17	50
EMC-G3/8-10-AL	G3/8	16.66	6~10	9.5	21/21	50
EMC-G1/2-14-AL	G1/2	20.99	8~14	12	24/26	50
EMC-G1/2-12-AL	G1/2	20.99	7~12	12	24/24	50
EMC-G3/4-18-AL	G3/4	26.44	13~18	12	30/31	50
EMC-G1-25-AL	G1	33.25	18~25	15	38/40	20
EMC-G1-1/4-31-AL	G1-1/4	41.91	25~31	15	48/50	10
EMC-G1-1/2-31-AL	G1-1/2	47.8	25~31	15	55/50	10
EMC-G1-1/2-41-AL	G1-1/2	47.8	33~41	15	55/60	10
EMC-G2-44-AL	G2	59.61	36~44	15	71/65	1
EMC-NPT1/4-08-AL	NPT1/4	13.15	4~8	9	17	50
EMC-NPT3/8-10-AL	NPT3/8	17.05	6~10	10	21	50
EMC-NPT1/2-14-AL	NPT1/2	21.22	8~14	13	26	50
EMC-NPT1/2-12-AL	NPT1/2	21.22	7~12	11	24	50
EMC-NPT3/4-18-AL	NPT3/4	26.56	13~18	13	31	50
EMC-NPT1-25-AL	NPT1	33.23	18~25	15	40	20
EMC-NPT1-1/4-31-AL	NPT1-1/4	41.98	25~31	15	50	10
EMC-NPT1-1/2-31-AL	NPT1-1/2	48.05	25~31	15	50	10
EMC-NPT1-1/2-41-AL	NPT1-1/2	48.05	33~41	15	60	10
EMC-NPT2-44-AL	NPT2	60.09	36~44	15	65	10

硅胶铝制防水接头

Silicone aluminum cable gland

材料: 6061铝, 密封件为硅胶

检测: 符合CE, IP68

温度: -20°C~150°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、

防尘、表面处理可选择原色或发黑处理, 耐高温

说明: 本产品不配备锁紧螺母, 标配密封垫片

LAND 蓝江



Material: 6061 aluminum, seal made of silicone

Testing: Compliant with CE, IP68

Temperature:- 20°C~150°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof

Dustproof and surface treatment can choose between primary color or blackening treatment, high temperature resistance

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	CaTle range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG12T-06-AL	M12×1.5	12	3~6.5	6	14/14	100
MG12T-08-AL	M12×1.5	12	4~8	6	14/16	100
MG16T-08-AL	M16×1.5	16	4~8	7	17/18	100
MG16T-10-AL	M16×1.5	16	5~10	7	20/20	100
MG20T-12-AL	M20×1.5	20	6~12	8	22/22	100
MG20T-14-AL	M20×1.5	20	8~14	8	24/24	100
MG25T-16-AL	M25×1.5	25	10~16	8	27/27	50
MG25T-18-AL	M25×1.5	25	13~18	8	30/30	50
MG32T-22-AL	M32×1.5 (2)	32	15~22	9	34/34	50
MG32T-25-AL	M32×1.5 (2)	32	18~25	9	40/40	50
MG40T-25-AL	M40×1.5 (2)	40	18~25	9	40/43	20
MG40T-28-AL	M40×1.5 (2)	40	20~28	10	43/43	20
MG50T-32-AL	M50×1.5 (2)	50	24~32	10	57/55	20
MG50T-38-AL	M50×1.5 (2)	50	30~38	10	58/55	20
MG63T-44-AL	M63×1.5 (2)	63	37~44	12	64/68	10
G1/4T-06-AL	G1/4	13.15	3~6.5	6	14/16	100
G3/8T-08-AL	G3/8	16.65	4~8	7	17/18	100
G1/2T-12-AL	G1/2	20.95	6~12	8	22/22	100
G3/4T-18-AL	G3/4	26.44	13~18	8	30/30	100
G1T-22-AL	G1	33.24	16~22	9	34/36	50
G1T-25-AL	G1	33.24	18~25	9	40/40	50
G1-1/4T-28-AL	G1-1/4	41.91	22~28	10	43/45	20
G1-1/4T-30-AL	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2T-32-AL	G1-1/2	47.8	25~32	10	50/52	20
G2T-44-AL	G2	59.61	37~44	12	64/64	10
NPT1/4T-06-AL	NPT1/4	13.15	3~6.5	6	14/16	100
NPT3/8T-08-AL	NPT3/8	16.65	4~8	7	17/18	100
NPT1/2T-12-AL	NPT1/2	20.95	6~12	8	22/22	100
NPT3/4T-18-AL	NPT3/4	26.44	13~18	8	30/30	100
NPT1T-22-AL	NPT1	33.24	16~22	9	34/36	50
NPT1T-25-AL	NPT1	33.24	18~25	9	40/40	50
NPT1-1/4T-28-AL	NPT1-1/4	41.91	22~28	10	43/45	20
NPT1-1/4T-30-AL	NPT1-1/4	41.91	23~30	10	45/45	20
NPT1-1/2T-32-AL	NPT1-1/2	47.8	25~32	10	50/52	20
NPT2T-44-AL	NPT2	59.61	37~44	12	64/64	10