

防爆不锈钢闷盖


Explosion proof stainless steel plug

材料: 304, 可选316或316L



测试: IP68, CE, Ex

特性: 采用优质不锈钢制成, 内外丝结构紧密, 符合隔爆, 增安及粉尘防爆标准, 密封件为硅胶, 使得本产品在高温环境亦可正常工作, 防护等级高且可耐一般酸碱及其他溶剂

说明: 默认不附螺母, 如需联系另行采购

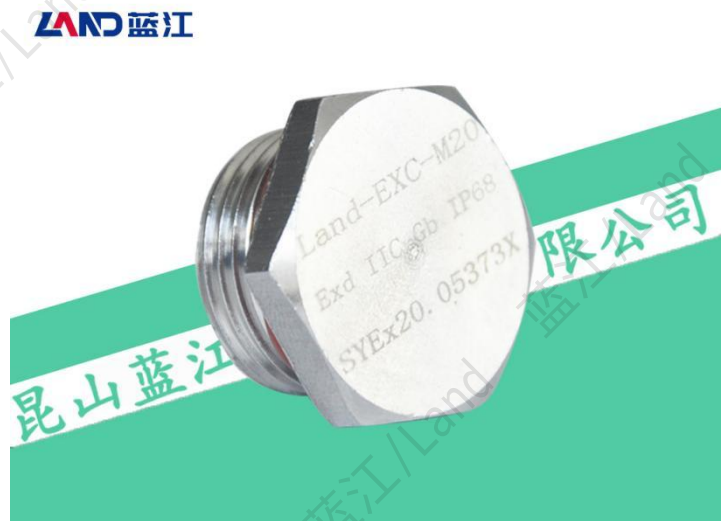

可选配件

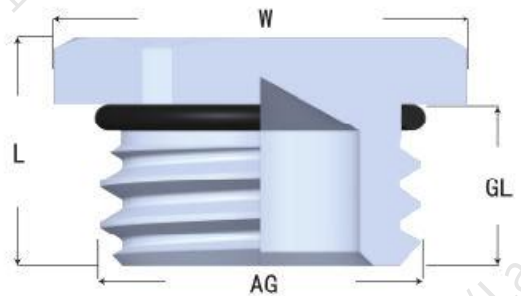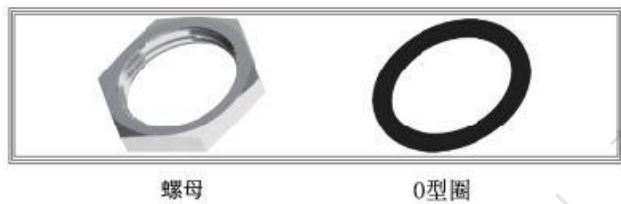

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis, and other solvents

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
Exd-GL-M12-SS	M12×1.5	12	11	14	100
Exd-GL-M14-SS	M14×1.5	14	11	18	100
Exd-GL-M16-SS	M16×1.5	16	11	20	100
Exd-GL-M18-SS	M18×1.5	18	11	22	100
Exd-GL-M20-SS	M20×1.5	20	12	24	50
Exd-GL-M22-SS	M22×1.5	22	12	26	50
Exd-GL-M24-SS	M24×1.5	24	12	28	50
Exd-GL-M25-SS	M25×1.5	25	14	30	50
Exd-GL-M27-SS	M27×1.5	27	14	32	50
Exd-GL-M27-SS	M27×2.0	27	14	32	50
Exd-GL-M30-SS	M30×1.5	30	14	34	50
Exd-GL-M30-SS	M30×2.0	30	14	34	50
Exd-GL-M32-SS	M32×1.5	32	14	38	50
Exd-GL-M33-SS	M33×2.0	32	14	38	50
Exd-GL-M36-SS	M36×1.5	36	14	42	20
Exd-GL-M36-SS	M36×2.0	36	14	42	20
Exd-GL-M40-SS	M40×1.5	40	15	45	20
Exd-GL-M42-SS	M42×2.0	42	15	45	20
Exd-GL-M48-SS	M48×2.0	48	15	55	20
Exd-GL-M50-SS	M50×1.5	50	15	55	20
Exd-GL-M60-SS	M60×2.0	60	15	65	10
Exd-GL-M63-SS	M63×1.5	63	15	68	10

产品参数表/NPT/G (PF) /PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
Exd-GL-NPT1/4-SS	NPT1/4	13.5	10	14	100
Exd-GL-NPT3/8-SS	NPT3/8	16.65	10	22	100
Exd-GL-NPT1/2-SS	NPT1/2	20.95	14	24	100
Exd-GL-NPT3/4-SS	NPT3/4	26.44	14	30	50
Exd-GL-NPT1-SS	NPT1	33.24	15	38	50
Exd-GL-NPT1-1/4-SS	NPT1-1/4	41.91	15	46	20
Exd-GL-NPT1-1/2-SS	NPT1-1/2	47.8	15	55	20
Exd-GL-NPT2-SS	NPT2	59.61	15	65	10
Exe-GL-G1/4-SS	G1/4	13.5	10	14	100
Exe-GL-G3/8-SS	G3/8	16.65	10	22	100
Exe-GL-G1/2-SS	G1/2	20.95	14	24	100
Exe-GL-G3/4-SS	G3/4	26.44	14	30	50
Exe-GL-G1-SS	G1	33.24	15	38	50
Exe-GL-G1-1/4-SS	G1-1/4	41.91	15	46	20
Exe-GL-G1-1/2-SS	G1-1/2	47.8	15	50	20
Exe-GL-G2-SS	G2	59.61	15	65	10
Exe-GL-PG7-SS	PG7	12.5	10	14	100
Exe-GL-PG9-SS	PG9	15.2	10	18	100
Exe-GL-PG11-SS	PG11	16.8	11	22	100
Exe-GL-PG13.5-SS	PG13.5	20.4	12	24	50
Exe-GL-PG16-SS	PG16	22.5	12	26	50
Exe-GL-PG19-SS	PG19	23.5	12	28	50
Exe-GL-PG21-SS	PG21	28.3	14	32	50
Exe-GL-PG25-SS	PG25	29.8	14	34	50
Exe-GL-PG29-SS	PG29	37	14	42	50
Exe-GL-PG36-SS	PG36	47	15	55	20
Exe-GL-PG42-SS	PG42	54	15	60	20
Exe-GL-PG48-SS	PG48	59.8	15	65	10

圆形不锈钢闷盖

Stainless steel circular plug

LAND 蓝江

材料：304，可选316或316L

测试：IP68，CE

特性：采用优质不锈钢制成，内外丝结构紧密，密封圈为硅胶材质，使得本产品在高温环境亦可正常工作，防护等级高且可耐一般酸碱及其他溶剂

说明：默认不附螺母，如需需另行采购




可选配件



螺母

O型圈

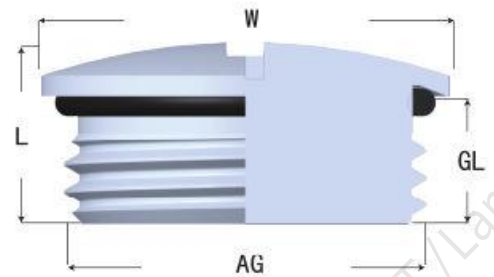

Material: 304, optional 316 or 316L

Testing: IP68, CE

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, and the sealing ring is made of silicone material, which allows this product to work normally in high temperature environments. It has a high protection level and can withstand general acids, alkalis, and other solvents

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M12-SS	M12×1.5	12	6	14	100
GY-M16-SS	M16×1.5	16	7	18	100
GY-M18-SS	M18×1.5	18	7	20	100
GY-M20-SS	M20×1.5	20	7	23	50
GY-M22-SS	M22×1.5	22	7	25	50
GY-M24-SS	M24×1.5	24	7	28	50
GY-M25-SS	M25×1.5	25	7	28	50
GY-M32-SS	M32×1.5	32	10	35	20
GY-M40-SS	M40×1.5	40	10	46	10
GY-M50-SS	M50×1.5	50	10	56	10
GY-M63-SS	M63×1.5	63	10	68	10
GY-PG7-SS	PG7	12.5	6	14	100
GY-PG9-SS	PG9	15.2	7	18	100
GY-PG11-SS	PG11	16.6	7	20	100
GY-PG13.5-SS	PG13.5	20.5	7	23	50
GY-PG16-SS	PG16	22.5	7	25	50
GY-PG21-SS	PG21	28.3	7	32	50
GY-PG29-SS	PG29	37	10	40	20
GY-PG36-SS	PG36	47	10	52	10
GY-PG42-SS	PG42	54	10	58	10
GY-PG48-SS	PG48	59.3	10	65	10
GY-G1/4-SS	G1/4	13.5	6	16	100
GY-G3/8-SS	G3/8	16.65	7	20	100
GY-G1/2-SS	G1/2	20.95	7	23	50
GY-G3/4-SS	G3/4	26.44	7	32	50
GY-G1-SS	G1	33.24	10	38	20
GY-G1-1/4-SS	G1-1/4	41.91	10	46	10
GY-G1-1/2-SS	G1-1/2	47.8	10	52	10
GY-G2-SS	G2	59.61	10	65	10
GY-NPT1/4-SS	NPT1/4	13.5	6	16	100
GY-NPT3/8-SS	NPT3/8	16.65	7	20	100
GY-NPT1/2-SS	NPT1/2	20.95	7	23	50
GY-NPT3/4-SS	NPT3/4	26.44	7	32	50
GY-NPT1-SS	NPT1	33.24	10	38	20
GY-NPT1-1/4-SS	NPT1-1/4	41.91	10	46	10
GY-NPT1-1/2-SS	NPT1-1/2	47.8	10	52	10
GY-NPT2-SS	NPT2	59.61	10	65	10

铜镀镍六角闷盖

Brass nickel plated hexagonal plug


LAND 蓝江

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，外六角结构，用于设备堵孔，可防水防尘密封，防护等级IP68，内外丝结构紧密，连接顺畅

说明：默认不附螺母，如需另行采购

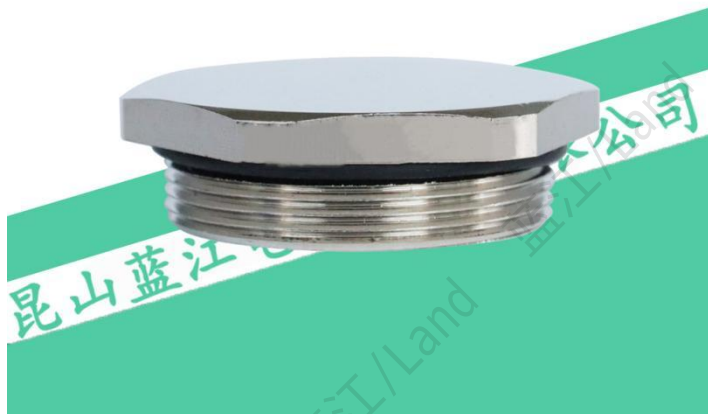

可选配件

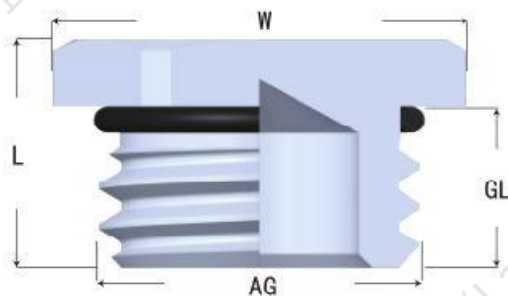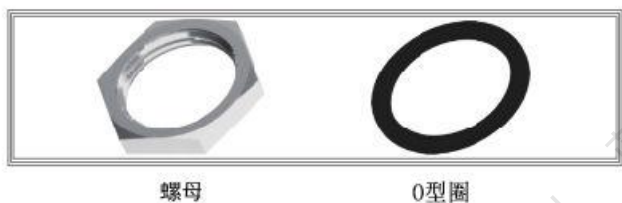

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, with an outer hexagonal structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, tight inner and outer wire structure, smooth connection

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GL-M10	M10×1.5	10	5	12	100
GL-M12	M12×1.5	12	5	14	100
GL-M14	M14×1.5	14	5	16	100
GL-M16	M16×1.5	16	6	18	100
GL-M18	M18×1.5	18	6	20	100
GL-M20	M20×1.5	20	7	22	100
GL-M22	M22×1.5	22	7	24	100
GL-M24	M24×1.5	24	7	27	100
GL-M25	M25×1.5	25	7	28	50
GL-M27	M27×1.5	27	7	30	50
GL-M30	M30×2.0	30	7	34	50
GL-M32	M32×1.5	32	7	36	50
GL-M33	M33×2.0	33	8	36	50
GL-M36	M36×1.5	36	8	40	50
GL-M40	M40×1.5	40	9	45	20
GL-M42	M42×2.0	42	9	45	20
GL-M48	M48×2.0	48	10	52	20
GL-M50	M50×1.5	50	10	55	10
GL-M63	M63×1.5	63	10	68	10
GL-M64	M64×2.0	64	10	68	10

产品参数表/NPT/G(PF)/PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GL-PG7	PG7	12.5	5	14	100
GL-PG9	PG9	15.2	6	17	100
GL-PG11	PG11	16.8	6	20	100
GL-PG13.5	PG13.5	20.4	7	22	50
GL-PG16	PG16	22.5	7	24	50
GL-PG21	PG21	28.3	7	30	50
GL-PG29	PG29	37	8	40	50
GL-PG36	PG36	47	9	50	20
GL-PG42	PG42	54	10	60	20
GL-PG48	PG48	59.8	10	64	10
GL-G1/4	G1/4	13.5	11	14	100
GL-G3/8	G3/8	16.65	12	22	100
GL-G1/2	G1/2	20.95	12	24	100
GL-G3/4	G3/4	26.44	14	30	50
GL-G1	G1	33.24	15	38	50
GL-G1-1/4	G1-1/4	41.91	15	46	20
GL-G1-1/2	G1-1/2	47.8	16	50	20
GL-G2	G2	59.61	18	65	10
GL-NPT1/4	NPT1/4	13.5	11	14	100
GL-NPT3/8	NPT3/8	16.65	12	22	100
GL-NPT1/2	NPT1/2	20.95	12	24	100
GL-NPT3/4	NPT3/4	26.44	14	30	50
GL-NPT1	NPT1	33.24	15	38	50
GL-NPT1-1/4	NPT1-1/4	41.91	15	46	20
GL-NPT1-1/2	NPT1-1/2	47.8	16	50	20
GL-NPT2	NPT2	59.61	18	65	10

铜镀镍圆形闷盖

Brass nickel plated circular plug

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，外圆形结构，用于设备堵孔，可防水防尘密封，防护等级IP68，内外丝结构紧密，连接顺畅

说明：默认不附螺母，如需另行采购



可选配件

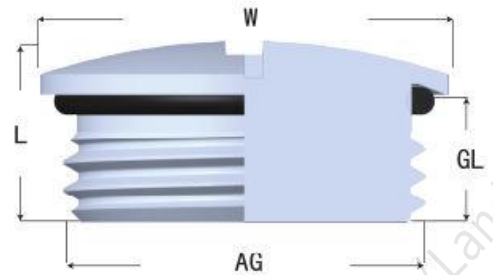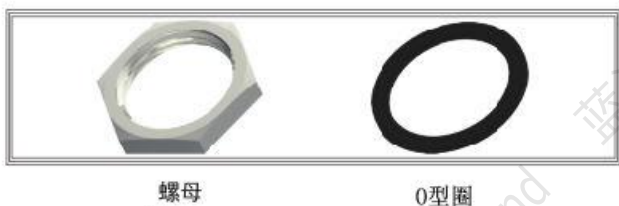

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, with an outer circular structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, tight inner and outer wire structure, smooth connection

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M10	M10×1.5	10	5	12	100
GY-M12	M12×1.5	12	5	14	100
GY-M16	M16×1.5	16	6	18	100
GY-M18	M18×1.5	18	6	21	100
GY-M20	M20×1.5	20	7	23	100
GY-M22	M22×1.5	22	7	25	100
GY-M24	M24×1.5	24	7	28	100
GY-M25	M25×1.5	25	7	28	50
GY-M27	M27×1.5	27	7	29.5	50
GY-M30	M30×2.0	30	7	32.5	50
GY-M32	M32×1.5	32	7	35	50
GY-M33	M33×2.0	33	8	36	50
GY-M36	M36×1.5	36	8	38.5	50
GY-M40	M40×1.5	40	9	44	20
GY-M42	M42×2.0	42	9	46	20
GY-M48	M48×2.0	48	10	52	20
GY-M50	M50×1.5	50	10	54	10
GY-M63	M63×1.5	63	10	67	10
GY-M64	M64×2.0	64	10	68	10

产品参数表/NPT/G(PF)/PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GY	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-PG7	PG7	12.5	5	14	100
GY-PG9	PG9	15.2	6	17	100
GY-PG11	PG11	16.8	6	21	100
GY-PG13.5	PG13.5	20.4	7	23	50
GY-PG16	PG16	22.5	7	25	50
GY-PG21	PG21	28.3	7	31	50
GY-PG29	PG29	37	8	40	50
GY-PG36	PG36	47	9	50	20
GY-PG42	PG42	54	10	57	20
GY-PG48	PG48	59.8	10	67	10
GY-G1/4	G1/4	13.5	11	17	100
GY-G3/8	G3/8	16.65	12	18	100
GY-G1/2	G1/2	20.95	12	23	100
GY-G3/4	G3/4	26.44	14	31	50
GY-G1	G1	33.24	15	35	50
GY-G1-1/4	G1-1/4	41.91	15	44	20
GY-G1-1/2	G1-1/2	47.8	16	52	20
GY-G2	G2	59.61	18	67	10
GY-NPT1/4	NPT1/4	13.5	11	14	100
GY-NPT3/8	NPT3/8	16.65	12	22	100
GY-NPT1/2	NPT1/2	20.95	12	24	100
GY-NPT3/4	NPT3/4	26.44	14	30	50
GY-NPT1	NPT1	33.24	15	38	50
GY-NPT1-1/4	NPT1-1/4	41.91	15	46	20
GY-NPT1-1/2	NPT1-1/2	47.8	16	50	20
GY-NPT2	NPT2	59.61	18	65	10

内外六角尼龙闷盖

Inner and outer hexagonal nylon plug

材料：尼龙

测试：IP68，CE，ROHS


特性：采用优质尼龙料制成，内外六角结构，用于设备堵孔，可防水防尘密封，防护等级IP68

说明：默认不附螺母，如需另行采购

Material: Nylon

Testing: IP68, CE, ROHS

Features: Made of high-quality nylon material, with internal and external hexagonal structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, default without nuts

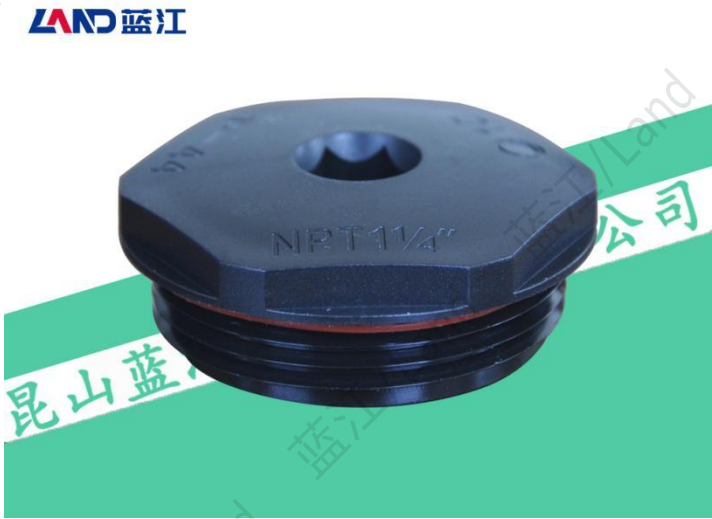

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	GL	W1	W2	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GLN-M12	M12×1.5	9.5	15	4	100
GLN-M16	M16×1.5	9.5	19	6	100
GLN-M20	M20×1.5	9.5	24	6	100
GLN-M25	M25×1.5	10.5	27	8	50
GLN-M32	M32×1.5	11	36	10	50
GLN-M40	M40×1.5	11.5	43	10	20
GLN-M50	M50×1.5	11.5	53	10	10
GLN-M63	M63×1.5	11.5	65	12	10
GLN-NPT3/8	NPT3/8	9.5	19	6	100
GLN-NPT1/2	NPT1/2	9.5	24	6	100
GLN-NPT3/4	NPT3/4	10.5	30	8	50
GLN-NPT1	NPT1	11	36	10	50
GLN-NPT1-1/4	NPT1-1/4	11.5	44	10	20
GLN-NPT1-1/2	NPT1-1/2	11	50	10	20
GLN-NPT2	NPT2	11.5	61	12	10

圆形尼龙闷盖

Circular nylon plug

LAND 蓝江

材料：尼龙

测试：IP68, CE, ROHS

特性：采用优质尼龙料制成，圆形结构设计，用于设备堵孔，可防水防尘密封，防护等级IP68

说明：默认不附螺母，如需另行采购




可选配件



螺母

垫片

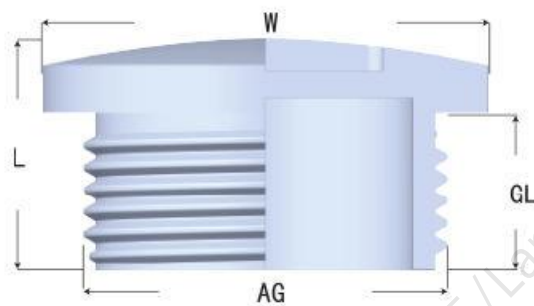

Material: Nylon

Testing: IP68, CE, ROHS

Features: Made of high-quality nylon material, with a circular structure design, used for plugging equipment holes, waterproof and dustproof sealing, and a protection level of IP68, Default without nuts and sealing rings

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M12	M12×1.5	12	8	15	100
GY-M16	M16×1.5	16	8	19	100
GY-M18	M18×1.5	18	9	22	100
GY-M20	M20×1.5	20	9	25	100
GY-M22	M22×1.5	22	10	27	100
GY-M25	M25×1.5	25	10	30	50
GY-M27	M27×1.5	27	10	33	50
GY-M32	M32×1.5	32	10	38	50
GY-M40	M40×1.5	40	11	46	20
GY-M50	M50×1.5	50	13	56	10
GY-M63	M63×1.5	63	14	68	10
GY-PG7	PG7	12.5	8	15	100
GY-PG9	PG9	15.2	8	19	100
GY-PG11	PG11	16.8	9	22	100
GY-PG13.5	PG13.5	20.4	9	25	50
GY-PG16	PG16	22.5	10	27	50
GY-PG21	PG21	28.3	10	33	50
GY-PG29	PG29	37	11	40	50
GY-PG36	PG36	47	13	55	20
GY-PG42	PG42	54	13	62	20
GY-PG48	PG48	59.8	14	68	10
GY-G1/2	G1/2	20.95	9	25	100
GY-G3/4	G3/4	26.44	10	33	50
GY-G1	G1	33.24	10	38	50

防爆不锈钢扩径环

Ex stainless steel adapter connector


材料: 304, 可选316或316L

测试: IP68, CE, Ex


特性: 采用优质不锈钢制成, 内外丝结构紧密, 符合隔爆, 增安及粉尘防爆标准, 密封件为硅胶, 使得本产品在高温环境亦可正常工作, 防护等级高且可耐一般酸碱及其他溶剂

说明: 默认不附螺母, 如需另行采购


LAND 蓝江

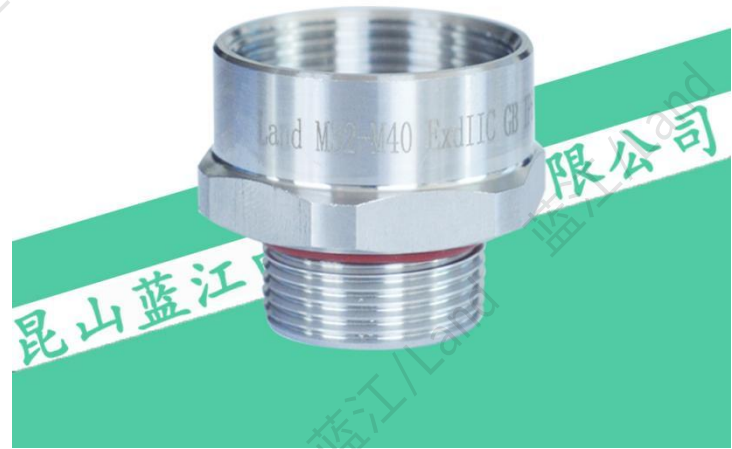

缩径环

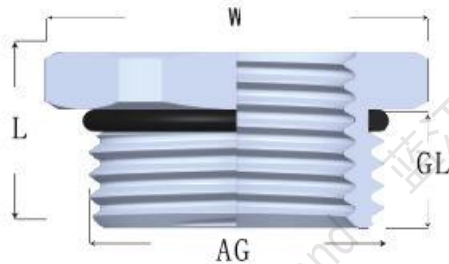

扩径环

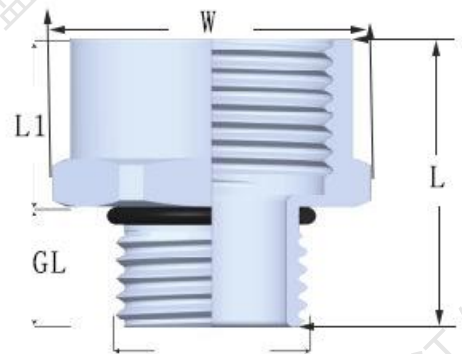

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis,

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ	mm	mm	Pcs/bag
Exd-M12-M16-SS	M12×1.5	M16×1.5	12	11	20	13	26	50
Exd-M12-M20-SS	M12×1.5	M20×1.5	12	11	24	13	26	50
Exd-M16-M20-SS	M16×1.5	M20×1.5	16	11	24	13	26	50
Exd-M16-M25-SS	M16×1.5	M25×1.5	16	11	30	14	27	50
Exd-M16-M32-SS	M16×1.5	M32×1.5	16	11	38	14	27	50
Exd-M16-NPT1/2-SS	M16×1.5	NPT1/2	16	11	24	14	27	50
Exd-M16-G1/2-SS	M16×1.5	G1/2	16	11	24	14	27	50
Exd-M18-M20-SS	M18×1.5	M20×1.5	18	11	24	13	26	50
Exd-M20-M25-SS	M20×1.5	M25×1.5	20	12	30	14	28	50
Exd-M20-M32-SS	M20×1.5	M32×1.5	20	12	38	14	28	50
Exd-M20-M40-SS	M20×1.5	M40×1.5	20	12	46	15	30	20
Exd-M20-NPT1/2-SS	M20×1.5	NPT1/2	20	12	24	14	28	50
Exd-M20-NPT3/4-SS	M20×1.5	NPT3/4	20	12	30	14	28	50
Exd-M20-NPT1-SS	M20×1.5	NPT1	20	12	38	15	30	50
Exd-M20-G1/2-SS	M20×1.5	G1/2	20	12	24	14	28	50
Exd-M20-G3/4-SS	M20×1.5	G3/4	20	12	30	14	28	50
Exd-M20-G1-SS	M20×1.5	G1	20	12	38	15	30	50
Exd-M20-PG16-SS	M20×1.5	PG16	20	12	26	13	27	50
Exd-M22-M25-SS	M22×1.5	M25×1.5	22	12	30	14	28	50
Exd-M25-M32-SS	M25×1.5	M32×1.5	25	14	38	14	30	50
Exd-M25-M40-SS	M25×1.5	M40×1.5	25	14	46	15	31	50
Exd-M25-NPT3/4-SS	M25×1.5	NPT3/4	25	14	30	14	30	50
Exd-M25-NPT1-SS	M25×1.5	NPT1	25	14	38	15	31	50
Exd-M25-G3/4-SS	M25×1.5	G3/4	25	14	30	14	30	50
Exd-M25-G1-SS	M25×1.5	G1	25	14	38	15	31	50
Exd-M27-M32-SS	M27×1.5	M32×1.5	27	14	38	14	30	50
Exd-M30-M32-SS	M30×1.5	M32×1.5	30	14	38	14	30	50
Exd-M32-M40-SS	M32×1.5	M40×1.5	32	14	46	14	30	50
Exd-M32-M50-SS	M32×1.5	M50×1.5	32	14	55	15	31	50
Exd-M32-NPT1-SS	M32×1.5	NPT1	32	14	38	15	31	50
Exd-M32-G1-SS	M32×1.5	G1	32	14	38	15	31	50
Exd-M40-M50-SS	M40×1.5	M50×1.5	40	15	55	15	32	10
Exd-M50-M63-SS	M50×1.5	M63×1.5	50	15	68	15	32	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ	mm	mm	Pcs/bag
Exd-NPT1/4-NPT3/8-SS	NPT1/4	NPT3/8	13.15	10	20	13	25	50
Exd-NPT3/8-NPT1/2-SS	NPT3/8	NPT1/2	16.66	10	24	14	26	50
Exd-NPT1/2-NPT3/4-SS	NPT1/2	NPT3/4	20.95	14	30	14	30	50
Exd-NPT1/2-NPT1-SS	NPT1/2	NPT1	20.95	14	38	15	31	50
Exd-NPT1/2-M20-SS	NPT1/2	M20×1.5	20.95	14	24	14	30	50
Exd-NPT1/2-M25-SS	NPT1/2	M25×1.5	20.95	14	30	14	30	50
Exd-NPT1/2-G1/2-SS	NPT1/2	G1/2	20.95	14	24	14	30	50
Exd-NPT1/2-G3/4-SS	NPT1/2	G3/4	20.95	14	30	14	30	50
Exd-NPT3/4-NPT1-SS	NPT3/4	NPT1	26.44	14	38	14	30	50
Exd-NPT3/4-M25-SS	NPT3/4	M25×1.5	26.44	14	30	14	30	50
Exd-NPT3/4-G3/4-SS	NPT3/4	G3/4	26.44	14	30	14	30	50
Exd-NPT1-NPT1-1/4-SS	NPT1	NPT1-1/4	33.24	15	46	15	32	50
Exd-NPT1-M32-SS	NPT1	M32×1.5	33.24	15	38	15	32	50
Exd-NPT1-G1-SS	NPT1	G1	33.24	15	38	15	32	50
Exd-NPT1-1/4-NPT1-1/2-SS	NPT1-1/4	NPT1-1/2	41.91	15	55	15	32	10
Exd-NPT1-1/2-NPT2-SS	NPT1-1/2	NPT2	47.8	15	65	15	32	10
Exe-G1/4-G3/8-SS	G1/4	G3/8	13.15	10	20	13	25	50
Exe-G3/8-G1/2-SS	G3/8	G1/2	16.66	10	24	14	26	50
Exe-G1/2-G3/4-SS	G1/2	G3/4	20.95	14	30	14	30	50
Exe-G1/2-G1-SS	G1/2	G1	20.95	14	38	15	31	50
Exe-G1/2-M20-SS	G1/2	M20×1.5	20.95	14	24	14	30	50
Exe-G1/2-M25-SS	G1/2	M25×1.5	20.95	14	30	14	30	50
Exe-G1/2-NPT1/2-SS	G1/2	NPT1/2	20.95	14	24	14	30	50
Exe-G1/2-NPT3/4-SS	G1/2	NPT3/4	20.95	14	30	14	30	50
Exe-G3/4-NPT1-SS	G3/4	NPT1	26.44	14	38	14	30	50
Exe-G3/4-M25-SS	G3/4	M25×1.5	26.44	14	30	14	30	50
Exe-G3/4-NPT3/4-SS	G3/4	NPT3/4	26.44	14	30	14	30	50
Exe-G1-G1-1/4-SS	G1	G1-1/4	33.24	15	46	15	32	50
Exe-G1-NPT1-SS	G1	NPT1	33.24	15	38	15	32	50
Exe-G1-1/4-G1-1/2-SS	G1-1/4	G1-1/2	41.91	15	55	15	32	10
Exe-G1-1/2-G2-SS	G1-1/2	G2	47.8	15	65	15	32	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	mm	Pcs/bag
Exe-PG7-PG9-SS	PG7	PG9	12.5	10	18	13	25	50
Exe-PG9-PG11-SS	PG9	PG11	15.2	10	22	13	25	50
Exe-PG9-M20-SS	PG9	M20×1.5	15.2	10	24	13	25	50
Exe-PG9-G1/2-SS	PG9	G1/2	15.2	10	24	14	26	50
Exe-PG9-NPT1/2-SS	PG9	NPT1/2	15.2	10	24	14	26	50
Exe-PG11-PG13.5-SS	PG11	PG13.5	18.6	11	24	13	26	50
Exe-PG11-PG16-SS	PG11	PG16	18.6	11	26	13	26	50
Exe-PG11-M20-SS	PG11	M20×1.5	18.6	11	24	13	26	50
Exe-PG11-G1/2-SS	PG11	G1/2	18.6	11	24	14	27	50
Exe-PG11-NPT1/2-SS	PG11	NPT1/2	18.6	11	24	14	27	50
Exe-PG13.5-PG16-SS	PG13.5	PG16	20.5	12	26	13	27	50
Exe-PG13.5-M20-SS	PG13.5	M20×1.5	20.5	12	24	13	27	50
Exe-PG13.5-G1/2-SS	PG13.5	G1/2	20.5	12	24	14	28	50
Exe-PG13.5-NPT1/2-SS	PG13.5	NPT1/2	20.5	12	24	14	28	50
Exe-PG16-PG21-SS	PG16	PG21	22.5	12	32	14	28	50
Exe-PG16-M20-SS	PG16	M20×1.5	22.5	12	26	13	27	50
Exe-PG16-M25-SS	PG16	M25×1.5	22.5	12	30	14	28	50
Exe-PG16-G1/2-SS	PG16	G1/2	22.5	12	26	14	28	50
Exe-PG16-G3/4-SS	PG16	G3/4	22.5	12	30	14	28	50
Exe-PG16-NPT1/2-SS	PG16	NPT1/2	22.5	12	26	14	28	50
Exe-PG16-NPT3/4-SS	PG16	NPT3/4	22.5	12	30	14	28	50
Exe-PG21-PG29-SS	PG21	PG29	28.3	14	40	14	30	50
Exe-PG21-M25-SS	PG21	M25×1.5	28.3	14	32	14	30	50
Exe-PG21-G1-SS	PG21	G1	28.3	14	32	15	31	50
Exe-PG21-NPT1-SS	PG21	NPT1	28.3	14	32	15	31	50
Exe-PG29-PG36-SS	PG29	PG36	37	14	55	15	31	50
Exe-PG29-M32-SS	PG29	M32×1.5	37	14	40	14	30	50
Exe-PG29-G1-SS	PG29	G1	37	14	40	15	31	50
Exe-PG29-NPT1-SS	PG29	NPT1	37	14	40	15	31	50
Exe-PG36-PG42-SS	PG36	PG42	47	15	60	15	32	10
Exe-PG42-PG48-SS	PG42	PG48	54	15	65	15	32	10

防爆不锈钢缩径环


Ex stainless steel adapter connector

材料：304，可选316或316L


测试：IP68，CE，Ex

特性：采用优质不锈钢制成，内外丝结构紧密，符合隔爆，增安及粉尘防爆标准，密封件为硅胶，使得本产品在高温环境亦可正常工作，防护等级高且可耐一般酸碱及其他溶剂


说明：默认不附螺母，如需另行采购

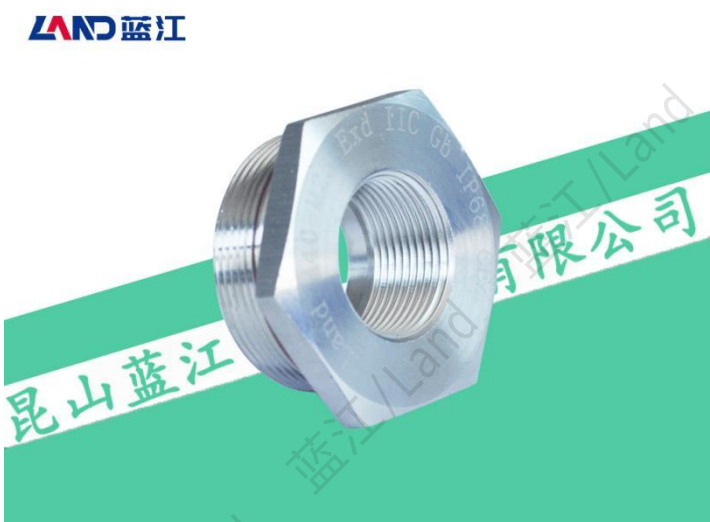

缩径环

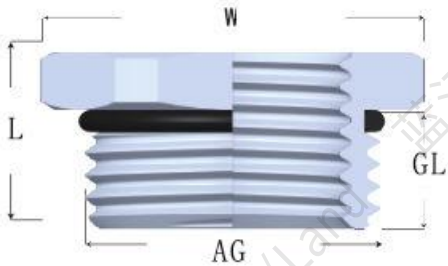

扩径环

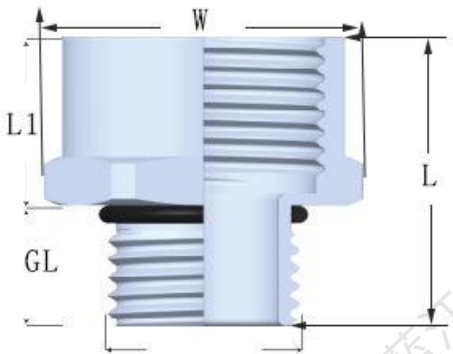

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exd-M16-M12-SS	M16×1.5	M12×1.5	16	11	20	15	50
Exd-M18-M16-SS	M18×1.5	M16×1.5	18	11	22	15	50
Exd-M20-M12-SS	M20×1.5	M12×1.5	20	12	24	17	50
Exd-M20-M16-SS	M20×1.5	M16×1.5	20	12	24	17	50
Exd-M20-PG9-SS	M20×1.5	PG9	20	12	24	17	50
Exd-M20-PG11-SS	M20×1.5	PG11	20	12	24	17	50
Exd-M25-M12-SS	M25×1.5	M12×1.5	25	14	30	20	50
Exd-M25-M16-SS	M25×1.5	M16×1.5	25	14	30	20	50
Exd-M25-M20-SS	M25×1.5	M20×1.5	25	14	30	20	50
Exd-M25-G1/2-SS	M25×1.5	G1/2	25	14	30	20	50
Exd-M25-NPT1/2-SS	M25×1.5	NPT1/2	25	14	30	20	50
Exd-M27-M20-SS	M27×1.5	M20×1.5	27	14	32	20	50
Exd-M27-M25-SS	M27×1.5	M25×1.5	27	14	32	20	50
Exd-M30-M20-SS	M30×1.5	M20×1.5	30	14	34	20	50
Exd-M30-M25-SS	M30×1.5	M25×1.5	30	14	34	20	50
Exd-M32-M16-SS	M32×1.5	M16×1.5	32	14	38	20	50
Exd-M32-M20-SS	M32×1.5	M20×1.5	32	14	38	20	50
Exd-M32-M25-SS	M32×1.5	M25×1.5	32	14	38	20	50
Exd-M36-M25-SS	M36×1.5	M25×1.5	36	14	42	20	50
Exd-M40-M20-SS	M40×1.5	M20×1.5	40	15	45	21	20
Exd-M40-M25-SS	M40×1.5	M25×1.5	40	15	45	21	20
Exd-M40-M32-SS	M40×1.5	M32×1.5	40	15	45	21	20
Exd-M50-M20-SS	M50×1.5	M20×1.5	50	15	55	21	20
Exd-M50-M25-SS	M50×1.5	M25×1.5	50	15	55	21	20
Exd-M50-M32-SS	M50×1.5	M32×1.5	50	15	55	21	20
Exd-M50-M40-SS	M50×1.5	M40×1.5	50	15	55	21	20
Exd-M63-M20-SS	M63×1.5	M20×1.5	63	15	68	21	10
Exd-M63-M25-SS	M63×1.5	M25×1.5	63	15	68	21	10
Exd-M63-M32-SS	M63×1.5	M32×1.5	63	15	68	21	10
Exd-M63-M40-SS	M63×1.5	M40×1.5	63	15	68	21	10
Exd-M63-M50-SS	M63×1.5	M50×1.5	63	15	68	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exe-G3/8-G1/4-SS	G3/8	G1/4	16.66	10	22	15	50
Exe-G1/2-G1/4-SS	G1/2	G1/4	20.95	14	24	20	50
Exe-G1/2-G3/8-SS	G1/2	G3/8	20.95	14	24	20	50
Exe-G1/2-M12-SS	G1/2	M12×1.5	20.95	14	24	20	50
Exe-G1/2-M16-SS	G1/2	M16×1.5	20.95	14	24	20	50
Exe-G1/2-PG7-SS	G1/2	PG7	20.95	14	24	20	50
Exe-G1/2-PG9-SS	G1/2	PG9	20.95	14	24	20	50
Exe-G1/2-PG11-SS	G1/2	PG11	20.95	14	24	20	50
Exe-G3/4-G1/2-SS	G3/4	G1/2	26.44	14	30	20	50
Exe-G3/4-M12-SS	G3/4	M12×1.5	26.44	14	30	20	50
Exe-G3/4-M16-SS	G3/4	M16×1.5	26.44	14	30	20	50
Exe-G3/4-M20-SS	G3/4	M20×1.5	26.44	14	30	20	50
Exe-G3/4-NPT1/2-SS	G3/4	NPT1/2	26.44	14	30	20	50
Exe-G3/4-PG7-SS	G3/4	PG7	26.44	14	30	20	50
Exe-G3/4-PG9-SS	G3/4	PG9	26.44	14	30	20	50
Exe-G3/4-PG11-SS	G3/4	PG11	26.44	14	30	20	50
Exe-G3/4-PG13.5-SS	G3/4	PG13.5	26.44	14	30	20	50
Exe-G3/4-PG16-SS	G3/4	PG16	26.44	14	30	20	50
Exe-G1-G1/2-SS	G1	G1/2	33.24	15	38	20	50
Exe-G1-G3/4-SS	G1	G3/4	33.24	15	38	20	50
Exe-G1-M12-SS	G1	M12×1.5	33.24	15	38	20	50
Exe-G1-M16-SS	G1	M16×1.5	33.24	15	38	20	50
Exe-G1-M20-SS	G1	M20×1.5	33.24	15	38	20	50
Exe-G1-M25-SS	G1	M25×1.5	33.24	15	38	20	50
Exe-G1-PG16-SS	G1	PG16	33.24	15	38	20	50
Exe-G1-PG21-SS	G1	PG21	33.24	15	38	20	50
Exe-G1-1/4-G1-SS	G1-1/4	G1	41.91	15	46	21	20
Exe-G1-1/2-G1-1/4-SS	G1-1/2	G1-1/4	47.8	15	55	21	20
Exe-G2-G1-SS	G2	G1	59.61	15	65	21	10
Exe-G2-G1-1/4-SS	G2	G1-1/4	59.61	15	65	21	10
Exe-G2-G1-1/2-SS	G2	G1-1/2	59.61	15	65	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exd-NPT3/8-NPT1/4-SS	NPT3/8	NPT1/4	16.66	10	22	15	50
Exd-NPT1/2-NPT1/4-SS	NPT1/2	NPT1/4	20.95	14	24	20	50
Exd-NPT1/2-NPT3/8-SS	NPT1/2	NPT3/8	20.95	14	24	20	50
Exd-NPT1/2-M12-SS	NPT1/2	M12×1.5	20.95	14	24	20	50
Exd-NPT1/2-M16-SS	NPT1/2	M16×1.5	20.95	14	24	20	50
Exd-NPT1/2-PG7-SS	NPT1/2	PG7	20.95	14	24	20	50
Exd-NPT1/2-PG9-SS	NPT1/2	PG9	20.95	14	24	20	50
Exd-NPT1/2-PG11-SS	NPT1/2	PG11	20.95	14	24	20	50
Exd-NPT3/4-NPT1/2-SS	NPT3/4	NPT1/2	26.44	14	30	20	50
Exd-NPT3/4-M12-SS	NPT3/4	M12×1.5	26.44	14	30	20	50
Exd-NPT3/4-M16-SS	NPT3/4	M16×1.5	26.44	14	30	20	50
Exd-NPT3/4-M20-SS	NPT3/4	M20×1.5	26.44	14	30	20	50
Exd-NPT3/4-G1/2-SS	NPT3/4	G1/2	26.44	14	30	20	50
Exd-NPT3/4-PG7-SS	NPT3/4	PG7	26.44	14	30	20	50
Exd-NPT3/4-PG9-SS	NPT3/4	PG9	26.44	14	30	20	50
Exd-NPT3/4-PG11-SS	NPT3/4	PG11	26.44	14	30	20	50
Exd-NPT3/4-PG13.5-SS	NPT3/4	PG13.5	26.44	14	30	20	50
Exd-NPT3/4-PG16-SS	NPT3/4	PG16	26.44	14	30	20	50
Exd-NPT1-NPT1/2-SS	NPT1	NPT1/2	33.24	15	38	20	50
Exd-NPT1-NPT3/4-SS	NPT1	NPT3/4	33.24	15	38	20	50
Exd-NPT1-M12-SS	NPT1	M12×1.5	33.24	15	38	20	50
Exd-NPT1-M16-SS	NPT1	M16×1.5	33.24	15	38	20	50
Exd-NPT1-M20-SS	NPT1	M20×1.5	33.24	15	38	20	50
Exd-NPT1-M25-SS	NPT1	M25×1.5	33.24	15	38	20	50
Exd-NPT1-PG16-SS	NPT1	PG16	33.24	15	38	20	50
Exd-NPT1-PG21-SS	NPT1	PG21	33.24	15	38	20	50
Exd-NPT1-1/4-NPT1-SS	NPT1-1/4	NPT1	41.91	15	46	21	20
Exd-NPT1-1/2-NPT1-1/4-SS	NPT1-1/2	NPT1-1/4	47.8	15	55	21	20
Exd-NPT2-NPT1-SS	NPT2	NPT1	59.61	15	65	21	10
Exd-NPT2-NPT1-1/4-SS	NPT2	NPT1-1/4	59.61	15	65	21	10
Exd-NPT2-NPT1-1/2-SS	NPT2	NPT1-1/2	59.61	15	65	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exe-PG9-PG7-SS	PG9	PG7	15.2	10	18	15	50
Exe-PG9-M12-SS	PG9	M12×1.5	15.2	10	18	15	50
Exe-PG11-PG7-SS	PG11	PG7	18.6	11	22	16	50
Exe-PG11-PG9-SS	PG11	PG9	18.6	11	22	16	50
Exe-PG11-M12-SS	PG11	M12×1.5	18.6	11	22	16	50
Exe-PG13.5-PG7-SS	PG13.5	PG7	20.5	12	24	17	50
Exe-PG13.5-PG9-SS	PG13.5	PG9	20.5	12	24	17	50
Exe-PG13.5-PG11-SS	PG13.5	PG11	20.5	12	24	17	50
Exe-PG13.5-M12-SS	PG13.5	M12×1.5	20.5	12	24	17	50
Exe-PG13.5-M16-SS	PG13.5	M16×1.5	20.5	12	24	17	50
Exe-PG16-PG7-SS	PG16	PG7	22.5	12	26	17	50
Exe-PG16-PG9-SS	PG16	PG9	22.5	12	26	17	50
Exe-PG16-PG11-SS	PG16	PG11	22.5	12	26	17	50
Exe-PG16-PG13.5-SS	PG16	PG13.5	22.5	12	26	17	50
Exe-PG16-M12-SS	PG16	M12×1.5	22.5	12	26	17	50
Exe-PG16-M16-SS	PG16	M16×1.5	22.5	12	26	17	50
Exe-PG21-PG7-SS	PG21	PG7	28.3	14	32	20	50
Exe-PG21-PG9-SS	PG21	PG9	28.3	14	32	20	50
Exe-PG21-PG11-SS	PG21	PG11	28.3	14	32	20	50
Exe-PG21-PG13.5-SS	PG21	PG13.5	28.3	14	32	20	50
Exe-PG21-PG16-SS	PG21	PG16	28.3	14	32	20	50
Exe-PG21-M12-SS	PG21	M12×1.5	28.3	14	32	20	50
Exe-PG21-M16-SS	PG21	M16×1.5	28.3	14	32	20	50
Exe-PG21-M20-SS	PG21	M20×1.5	28.3	14	32	20	50
Exe-PG29-PG16-SS	PG29	PG16	37	14	42	20	20
Exe-PG29-PG21-SS	PG29	PG21	37	14	42	20	20
Exe-PG29-M20-SS	PG29	M20×1.5	37	14	42	20	20
Exe-PG29-M25-SS	PG29	M25×1.5	37	14	42	20	20
Exe-PG36-PG29-SS	PG36	PG29	47	15	55	21	10
Exe-PG42-PG36-SS	PG42	PG36	54	15	60	21	10
Exe-PG48-PG42-SS	PG48	PG42	59.3	15	65	21	10

铜镀镍扩径环

Copper nickel plated adapter connector


LAND 蓝江

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，内外丝结构紧密，密封圈为NBR材质，耐油及一般溶剂，扩径环结构，适用于螺纹增大转接

说明：默认不附螺母，如需另行采购

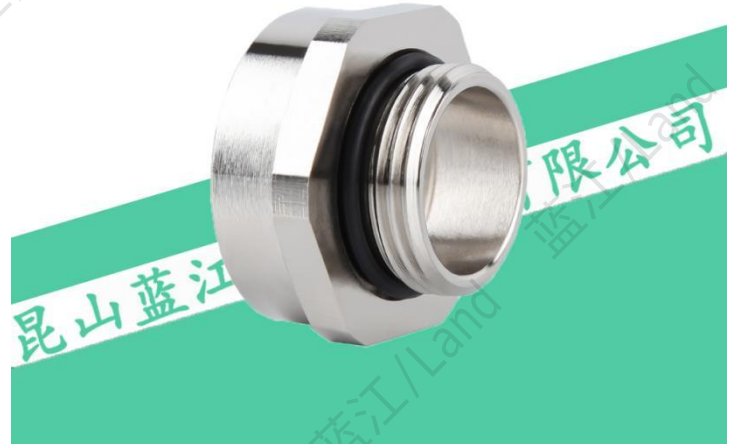

缩径环

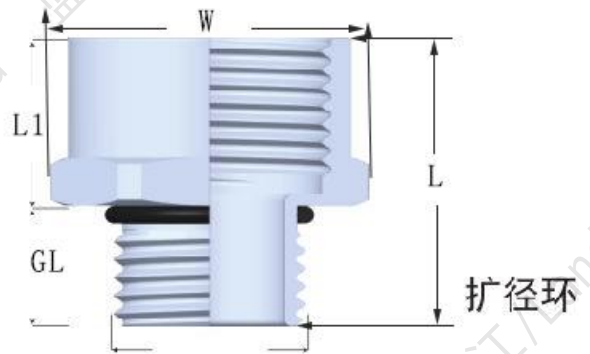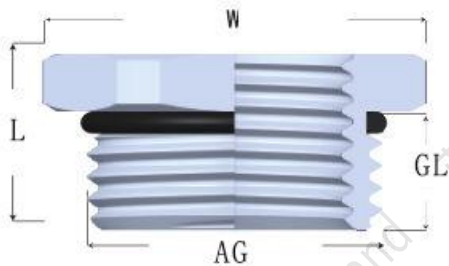

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, the inner and outer wire structures are tight, and the sealing ring is made of NBR material, which is resistant to oil and general solvents. The expansion ring structure is suitable for thread enlargement and adapter

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
M12-M16	M12×1.5	M16×1.5	12	6	20	18	100
M12-M20	M12×1.5	M20×1.5	12	6	20	22	100
M16-M20	M16×1.5	M20×1.5	16	6	20	22	100
M16-M25	M16×1.5	M25×1.5	16	6	23	27	100
M16-G1/2	M16×1.5	G1/2	16	6	20	22	100
M18-M20	M18×1.5	M20×1.5	18	6.5	22	22	100
M20-M24	M20×1.5	M24×1.5	20	7	23	27	50
M20-M25	M20×1.5	M25×1.5	20	8	23	27	50
M20-M30	M20×1.5	M30×2.0	20	8	23	32	50
M20-M32	M20×1.5	M32×1.5	20	7	22	34	50
M20-NPT1/2	M20×1.5	NPT1/2	20	7	23	22	50
M20-PG13.5	M20×1.5	PG13.5	20	7	23	22	50
M24-M25	M24×1.5	M25×1.5	24	7	25	27	50
M24-M27	M24×1.5	M27×2.0	24	7	25	30	50
M24-M30	M24×1.5	M30×2.0	24	7	25	32	50
M27-M32	M27×2.0	M32×1.5	27	7	25	36	50
M25-M30	M25×1.5	M30×2.0	25	8	23	32	50
M25-M32	M25×1.5	M32×1.5	25	9	25	36	50
M25-M40	M25×1.5	M40×1.5	25	8	25	45	50
M27-M36	M27×2.0	M36×2.0	27	8	24	40	50
M32-M40	M32×1.5	M40×1.5	32	9	26	45	50
M32-M50	M32×1.5	M40×1.5	32	9	26	55	20
M36-M48	M36×2.0	M48×2.0	36	9	26	50	20
M40-M50	M40×1.5	M50×1.5	40	10	27	55	20
M40-M63	M40×1.5	M63×1.5	40	10	28	67	20
M48-M63	M48×2.0	M63×1.5	48	10	28	67	10
M50-M63	M50×1.5	M63×1.5	50	10	29	67	10
M63-M72	M63×1.5	M72×2.0	63	10	29	75	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
PG7-PG9	PG7	PG9	12.5	6	19.5	18	50
PG9-PG11	PG9	PG11	15.2	7	21.5	22	50
PG9-PG13.5	PG9	PG13.5	15.2	7	21.5	22	50
PG9-PG16	PG9	PG16	15.2	7	23	24	50
PG11-PG13.5	PG11	PG13.5	18.6	7	22	22	50
PG11-PG16	PG11	PG16	18.6	7	22	25	50
PG13.5-PG16	PG13.5	PG16	20.5	8	23	24	50
PG16-PG21	PG16	PG21	22.5	8	23	30	50
PG16-PG29	PG16	PG29	22.5	8	23	40	50
PG21-PG29	PG21	PG29	28.3	8	25	40	50
PG29-PG36	PG29	PG36	37	10	27	50	20
PG36-PG42	PG36	PG42	47	10	29	60	20
PG42-PG48	PG42	PG48	54	11	31	65	10
G1/4-G3/8	G1/4	G3/8	13.15	7	21	20	10
G3/8-G1/2	G3/8	G1/2	16.66	7	21	24	50
G1/2-G3/4	G1/2	G3/4	20.95	7	21	30	50
G1/2-G1	G1/2	G1	20.95	7	21	36	50
G3/4-G1	G3/4	G1	26.44	7	21	36	50
G1-G1-1/4	G1	G1-1/4	33.24	9	24	45	50
G1-G1-1/2	G1	G1-1/2	33.24	9	26	55	50
G1-1/4-G1-1/2	G1-1/4	G1-1/2	41.91	9	26	55	50
G1-1/4-G2	G1-1/4	G2	41.91	10	28	65	50
G1-1/2-G2	G1-1/2	G2	47.8	10	28	65	50
NPT1/4-NPT3/8	NPT1/4	NPT3/8	13.15	7	21	20	10
NPT3/8-NPT1/2	NPT3/8	NPT1/2	16.66	7	21	24	50
NPT1/2-NPT3/4	NPT1/2	NPT3/4	20.95	7	21	30	50
NPT1/2-NPT1	NPT1/2	NPT1	20.95	7	21	36	50
NPT3/4-NPT1	NPT3/4	NPT1	26.44	7	21	36	50
NPT1-NPT1-1/4	NPT1	NPT1-1/4	33.24	9	24	45	50
NPT1-NPT1-1/2	NPT1	NPT1-1/2	33.24	9	26	55	50
NPT1-1/4-NPT1-1/2	NPT1-1/4	NPT1-1/2	41.91	9	26	55	50
NPT1-1/4-NPT2	NPT1-1/4	NPT2	41.91	10	28	65	50
NPT1-1/2-NPT2	NPT1-1/2	NPT2	47.8	10	28	65	50

铜镀镍缩径环

Copper nickel plated adapter connector


LAND 蓝江

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，内外丝结构紧密，密封圈为NBR材质，耐油及一般溶剂，缩径环结构，适用于螺纹减小转接

说明：默认不附螺母，如需另行采购

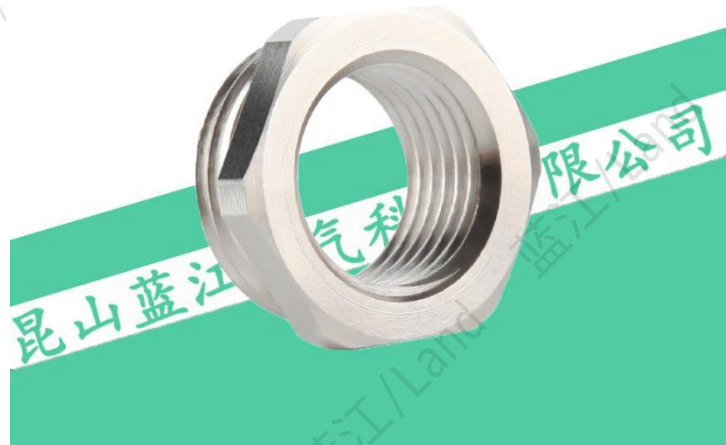

缩径环

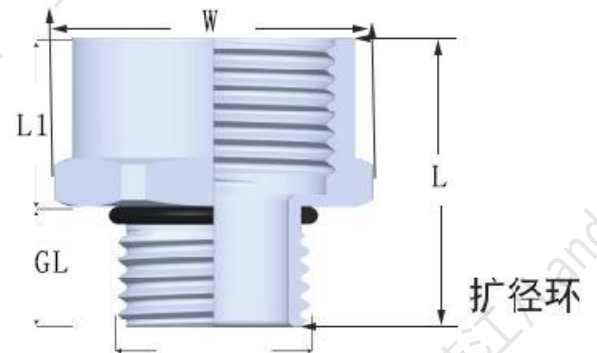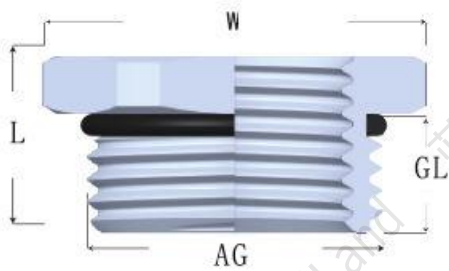

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, the inner and outer wire structures are tight, and the sealing ring is made of NBR material, which is resistant to oil and general solvents. The reduced diameter ring structure is suitable for thread reduction and adapter

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
M16-M12	M16×1.5	M12×1.5	12	6	9	18	100
M18-M16	M18×1.5	M16×1.5	18	7	9	20	100
M20-M12	M20×1.5	M12×1.5	20	7	10	22	100
M20-M16	M20×1.5	M16×1.5	20	7	10	22	100
M20-M18	M20×1.5	M18×1.5	20	7	10	22	100
M24-M20	M24×1.5	M20×1.5	24	7	10	27	100
M25-M16	M25×1.5	M16×1.5	25	8	11	27	50
M25-M20	M25×1.5	M20×1.5	25	8	11	27	50
M27-M18	M27×2.0	M18×1.5	27	8	12	30	50
M27-M20	M27×2.0	M20×1.5	27	8	12	30	50
M27-M24	M27×2.0	M24×1.5	27	8	12	30	50
M30-M20	M30×2.0	M20×1.5	30	8	12	32	50
M30-M24	M30×2.0	M24×1.5	30	8	12	32	50
M30-M27	M30×2.0	M27×2.0	30	8	12	32	50
M32-M16	M32×1.5	M16×1.5	32	8	11.5	34	50
M32-M20	M32×1.5	M20×1.5	32	8	11.5	34	50
M32-M25	M32×1.5	M25×1.5	32	8	11.5	34	50
M32-M27	M32×1.5	M27×2.0	32	8	11.5	34	50
M36-M24	M36×2.0	M24×1.5	36	8	12	40	50
M36-M25	M36×2.0	M25×1.5	36	8	12	40	50
M36-M30	M36×2.0	M30×2.0	36	8	12	40	50
M40-M20	M40×1.5	M20×1.5	40	9	12.5	42	20
M40-M25	M40×1.5	M25×1.5	40	9	12.5	42	20
M40-M32	M40×1.5	M32×1.5	40	9	12.5	42	20
M50-M20	M50×1.5	M20×1.5	50	10	13.5	55	20
M50-M25	M50×1.5	M25×1.5	50	10	13.5	55	20
M50-M32	M50×1.5	M32×1.5	50	10	13.5	55	20
M50-M40	M50×1.5	M40×1.5	50	10	13.5	55	20
M63-M25	M63×1.5	M25×1.5	63	10	14.5	65	10
M63-M32	M63×1.5	M32×1.5	63	10	14.5	65	10
M63-M40	M63×1.5	M40×1.5	63	10	14.5	65	10
M63-M50	M63×1.5	M50×1.5	63	10	14.5	65	10
M75-M63	M75×2.0	M63×1.5	75	16	21	82	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
PG9-PG7	PG9	PG7	15.2	6	10	18	50
PG11-PG9	PG11	PG9	18.6	6	10	20	50
PG13.5-PG9	PG13.5	PG9	20.5	7	10	22	50
PG13.5-PG11	PG13.5	PG11	20.5	7	10	22	50
PG16-PG9	PG16	PG9	22.5	7	10	24	50
PG16-PG11	PG16	PG11	22.5	7	10	24	50
PG16-PG13.5	PG16	PG13.5	22.5	7	10	24	50
PG21-PG9	PG21	PG9	28.3	7	11	30	50
PG21-PG11	PG21	PG11	28.3	7	11	30	50
PG21-PG13.5	PG21	PG13.5	28.3	7	11	30	50
PG21-PG16	PG21	PG16	28.3	7	11	30	50
PG29-PG16	PG29	PG16	37	8	12	40	50
PG29-PG21	PG29	PG21	37	8	12	40	50
PG36-PG29	PG36	PG29	47	9	13	50	20
PG42-PG36	PG42	PG36	54	10	14	60	20
PG48-PG36	PG48	PG36	59.3	10	15	65	10
PG48-PG42	PG48	PG42	59.3	10	15	65	10
G3/8-G1/4	G3/8	G1/4	16.66	6	10	20	50
G1/2-G3/8	G1/2	G3/8	20.95	7	10	24	50
G3/4-G1/2	G3/4	G1/2	26.44	7	10	30	50
G1-G3/4	G1	G3/4	33.24	8	12	36	50
G1-1/4-G1	G1-1/4	G1	41.91	9	12	45	25
G1-1/2-G1-1/4	G1-1/2	G1-1/4	47.8	10	14	50	20
G2-G1	G2	G1	59.61	10	14	65	10
G2-G1-1/2	G2	G1-1/2	59.61	10	14	65	10
NPT3/8-NPT1/4	NPT3/8	NPT1/4	16.66	6	10	20	50
NPT1/2-NPT3/8	NPT1/2	NPT3/8	20.95	7	10	24	50
NPT3/4-NPT1/2	NPT3/4	NPT1/2	26.44	7	10	30	50
NPT1-NPT3/4	NPT1	NPT3/4	33.24	8	12	36	50
NPT1-1/4-NPT1	NPT1-1/4	NPT1	41.91	9	12	45	25
NPT1-1/2-NPT1-1/4	NPT1-1/2	NPT1-1/4	47.8	10	14	50	20
NPT2-NPT1	NPT2	NPT1	59.61	10	14	65	10
NPT2-NPT1-1/2	NPT2	NPT1-1/2	59.61	10	14	65	10

铜镀镍对接环

Copper nickel plated adapter connector



材料：黄铜镀镍

测试：IP68，CE

特性：双内丝结构，用于螺纹连接

Material: Nickel Plated Brass

Testing: IP68，CE

Features: used for threaded connections



蓝江产品型号	内螺纹规格	产品尺寸/Product size		包装
Product model	internal thread	总长 L	对边 W	packing
PN.	M/PG/G	Φ mm	Φ mm	Pcs/bag
M12F-M12F	M12×1.5	16	14	50
M16F-M16F	M16×1.5	18	18	50
M18F-M18F	M18×1.5	22	21	50
M20F-M20F	M20×1.5	22	23	50
M24F-M24F	M24×1.5	22	27	50
M25F-M25F	M25×1.5	22	28	50
M27F-M27F	M27×2.0	22	30	20
M32F-M32F	M32×1.5	24	36	20
M36F-M36F	M36×2.0	28	40	20
M40F-M40F	M40×1.5	30	45	10
M48F-M48F	M48×2.0	35	52	10
M50F-M50F	M50×1.5	35	55	10
M63F-M63F	M63×1.5	42	70	10
G1/4F-G1/4F	G1/4	18	17	50
G3/8F-G3/8F	G3/8	18	20	50
G1/2F-G1/2F	G1/2	24	24	50
G3/4F-G3/4F	G3/4	24	30	50
G1F-G1F	G1	24	38	20
G1-1/4F-G1-1/4F	G1-1/4	26	45	20
G1-1/2F-G1-1/2F	G1-1/2	30	52	20
G2F-G2F	G2	38	65	10
G2-1/2F-G2-1/2F	G2-1/2	38	80	10
G3F-G3F	G3	35	100	10

尼龙扩径环


Nylon adapter connector

材料：尼龙/Nylon

温度：-40° C~100° C

颜色：黑色，浅灰色

防水：配合密封圈时可达IP68

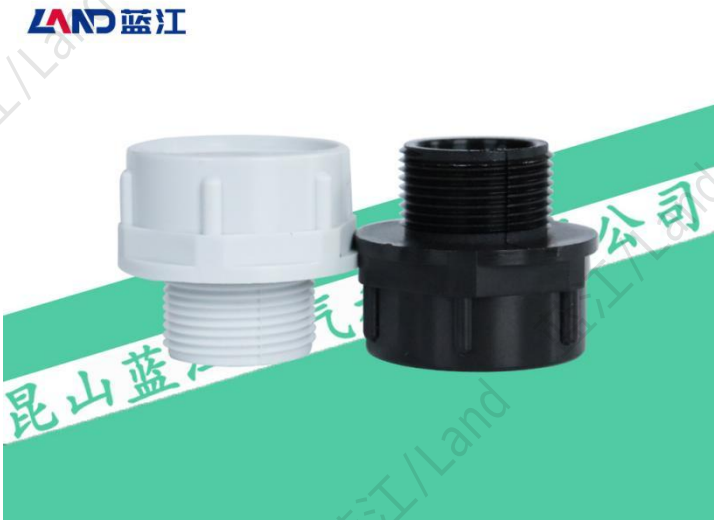

Material：Nylon/Nylon

Temperature：- 40° C~100° C

Color：Black, Light Grey

Waterproof：up to IP68 when combined with a sealing ring

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size			包装
Product model	外螺纹	内螺纹	AG	GL	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Pcs/bag
M12-M16	M12×1.5	M16×1.5	12	8	22	100
M16-M20	M16×1.5	M20×1.5	16	10	27	100
M16-M25	M16×1.5	M25×1.5	16	10	27	100
M16-M27	M16×1.5	M27×2.0	16	10	27	100
M16-PG16	M16×1.5	PG6	16	10	27	100
M20-M25	M20×1.5	M25×1.5	20	8	25	50
M25-M32	M25×1.5	M32×1.5	25	14	34	50
M32-M40	M32×1.5	M40×1.5	32	14	34	50
M40-M50	M40×1.5	M50×1.5	40	14	37	25
M50-M63	M50×1.5	M63×1.5	50	15	40	20
PG9-PG11	PG9	PG11	15.2	10	24	100
PG9-PG16	PG9	PG16	15.2	10	27	100
PG11-M20	PG11	M20×1.5	18.6	8	25	100
PG13.5-PG16	PG13.5	PG16	20.5	8	25	100
PG16-PG21	PG16	PG21	22.5	10	27	100

尼龙缩径环

Nylon adapter connector



材料：尼龙/Nylon

温度：-40° C~100° C

颜色：黑色，浅灰色

防水：配合密封圈时可达IP68

Description: Made of nylon, with a sealing ring, waterproof up to IP68



蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size			包装
Product model	外螺纹	内螺纹	AG	GL	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Pcs/bag
M16-M12	M16×1.5	M12×1.5	16	9	15	50
M20-M12	M20×1.5	M12×1.5	20	9	15	50
M20-M16	M20×1.5	M16×1.5	20	9	15	50
M20-PG9	M20×1.5	PG9	20	9	15	50
M20-PG11	M20×1.5	PG11	20	8	22	50
M25-M20	M25×1.5	M20×1.5	25	9.5	26	50
M27-M16	M27×2.0	M16×1.5	27	9	15	50
M30-M16	M30×2.0	M16×1.5	30	14.5	24.5	50
M32-M20	M32×1.5	M20×1.5	32	11.5	17	50
M36-M32	M36×2.0	M32×1.5	36	11.5	17.5	50
M40-M25	M40×1.5	M25×1.5	40	11	17	20
M40-M32	M40×1.5	M32×1.5	40	11	17	20
M50-M40	M50×1.5	M40×1.5	50	15	20	10
M50-M32	M50×1.5	M32×1.5	50	15	20	10
M63-M50	M63×1.5	M50×1.5	63	15	20	10
PG11-PG9	PG11	PG9	18.6	9	15	50
PG13.5-PG9	PG13.5	PG9	20.5	9	15	50
PG13.5-PG11	PG13.5	PG11	20.5	9	15	50
PG16-PG11	PG16	PG11	22.5	10	27	50
PG16-PG13.5	PG16	PG13.5	22.5	10	27	50
PG16-M16	PG16	M16×1.5	22.5	10	7	50
PG21-PG16	PG21	PG16	28.3	11	17	50
PG29-PG21	PG29	PG21	37	11	17	50


尼龙对接环

Nylon adapter connector

材料：尼龙/Nylon

测试：IP68，CE，ROHS

特性：采用优质尼龙原料制成，可选黑色或浅灰色

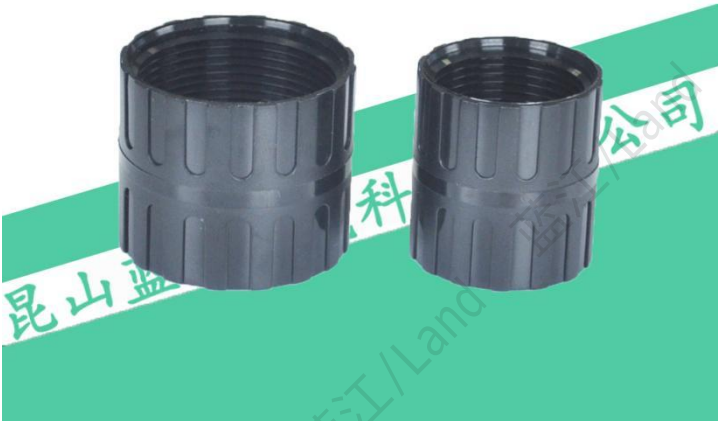

Description: Made of high-quality nylon raw materials, available in black or light gray, and does not come with nuts by default

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size		包装
Product model	内螺纹1	内螺纹2	AG	总长L	packing
PN.	F thread	F thread	Φ mm	mm	Pcs/bag
M16F-M16F	M16×1.5	M16×1.5	16	31.5	50
M20F-M20F	M20×1.5	M20×1.5	20	31.5	50
M25F-M25F	M25×1.5	M25×1.5	25	31.5	50
M32F-M32F	M32×1.5	M32×1.5	32	31.5	50
M40F-M40F	M40×1.5	M40×1.5	40	31.5	50
M50F-M50F	M50×1.5	M50×1.5	50	35	20
M63F-M63F	M63×1.5	M63×1.5	63	35	20

不锈钢锁紧螺母

Stainless steel locking nut


LAND 蓝江

材料：304不锈钢，可选316或316L

颜色：银色

性能：外形美观，螺纹精密，耐腐蚀，耐酸碱

作用：为格兰头，闷盖等与设备连接提供锁紧支持

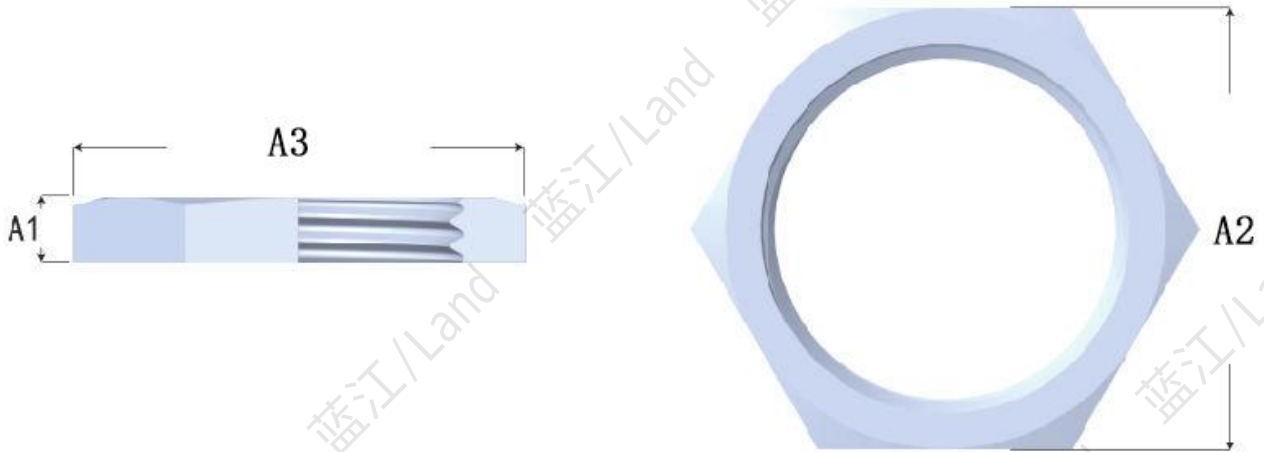

Material: 304, optional 316 or 316L

Color: Silver

Performance: Beautiful appearance, precise threads, corrosion resistance, acid and alkali resistance

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12-SS	M12×1.5	15	3	100
L-M16-SS	M16×1.5	20	3.5	100
L-M18-SS	M18×1.5	21	3.5	100
L-M20-SS	M20×1.5	24	3.5	100
L-M22-SS	M22×1.5	26	3.5	100
L-M24-SS	M24×1.5	28	3.5	100
L-M25-SS	M25×1.5	30	4	100
L-M27-SS	M27×1.5	30	4	100
L-M30-SS	M30×1.5	34	4	100
L-M32-SS	M32×1.5	38	5	50
L-M33-SS	M33×2.0	38	5	50
L-M36-SS	M36×1.5	42	5	50
L-M40-SS	M40×1.5	46	5	50
L-M42-SS	M42×2.0	48	5	50
L-M48-SS	M48×2.0	58	5	50
L-M50-SS	M50×1.5	58	5	50
L-M63-SS	M63×1.5	71	6	20
L-M64-SS	M64×1.5	71	6	20
L-PG7-SS	PG7	15	3	100
L-PG9-SS	PG9	17	3	100
L-PG11-SS	PG11	22	3.5	100
L-PG13.5-SS	PG13.5	24	3.5	100
L-PG16-SS	PG16	26	3.5	100
L-PG21-SS	PG21	32	4	100
L-PG29-SS	PG29	40	5	100
L-PG36-SS	PG36	58	5.5	50
L-PG42-SS	PG42	60	6	50
L-PG48-SS	PG48	71	6	20
L-G1/4-SS	G1/4	15	3	100
L-G3/8-SS	G3/8	22	3.5	100
L-G1/2-SS	G1/2	24	3.5	100
L-G3/4-SS	G3/4	30	4	100
L-G1-SS	G1	38	5	100
L-G1-1/4-SS	G1-1/4	48	5	50
L-G1-1/2-SS	G1-1/2	55	5.5	50
L-G2-SS	G2	71	6	20

铜镀镍锁紧螺母

Copper nickel plated locking nut





材料：黄铜镀镍

颜色：银色

性能：外形美观，螺纹精密，耐腐蚀，耐酸碱

作用：为格兰头，闷盖等与设备连接提供锁紧支持

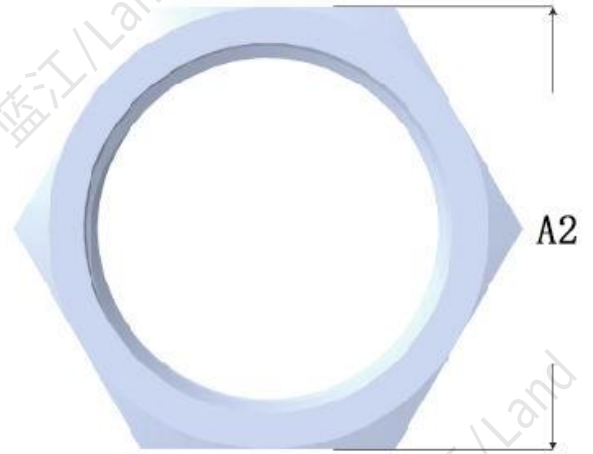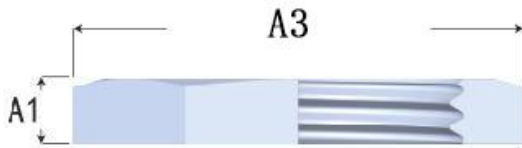

Material: Nickel plated brass

Color: Silver

Performance: Beautiful appearance, precise

threads, corrosion resistance, acid and alkali resistance

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M10	M10×1.5	12	2.5	100
L-M12	M12×1.5	15	2.8	100
L-M16	M16×1.5	19	2.8	100
L-M18	M18×1.5	21	3	100
L-M20	M20×1.5	23	3	100
L-M22	M22×1.5	26	3	100
L-M24	M24×1.5	28	3.5	100
L-M25	M25×1.5	30	3.5	100
L-M27	M27×1.5	32	4	100
L-M30	M30×1.5	34	4	100
L-M32	M32×1.5	36	4	50
L-M33	M33×2.0	36	4	50
L-M36	M36×1.5	40	4	50
L-M40	M40×1.5	45	5	50
L-M42	M42×2.0	46	5	50
L-M48	M48×2.0	55	5	50
L-M50	M50×1.5	55	5	50
L-M56	M56×2.0	60	5	50
L-M60	M60×2.0	65	5	50
L-M63	M63×1.5	70	6	20
L-M64	M64×1.5	70	6	20
L-PG7	PG7	15	2.8	100
L-PG9	PG9	18	2.8	100
L-PG11	PG11	21	3	100
L-PG13.5	PG13.5	23	3	100
L-PG16	PG16	26	3	100
L-PG21	PG21	32	3.5	100
L-PG29	PG29	40	4	100
L-PG36	PG36	50	5	50
L-PG42	PG42	60	5	50
L-PG48	PG48	65	5.5	20
L-G1/4	G1/4	15	2.8	100
L-G3/8	G3/8	20	3	100
L-G1/2	G1/2	20	4	100
L-G3/4	G3/4	30	4	100
L-G1	G1	40	5	100
L-G1-1/4	G1-1/4	50	5	50
L-G1-1/2	G1-1/2	55	6	50
L-G2	G2	65	6	20

尼龙锁紧螺母

Nylon locking nut



LAND 蓝江

材料：尼龙

颜色：黑色，灰白色

环保：ROHS

作用：为格兰头，闷盖等与设备连接提供锁紧支持

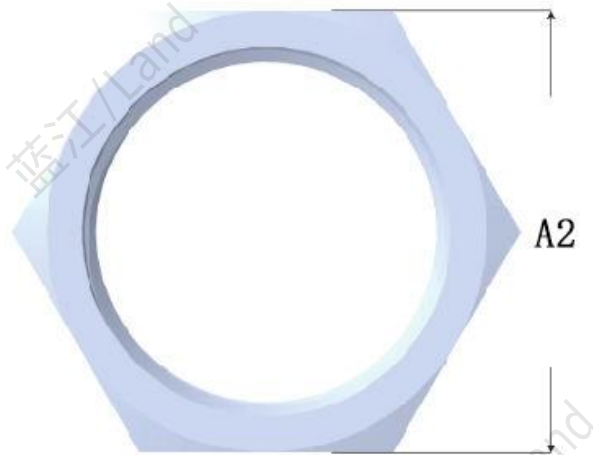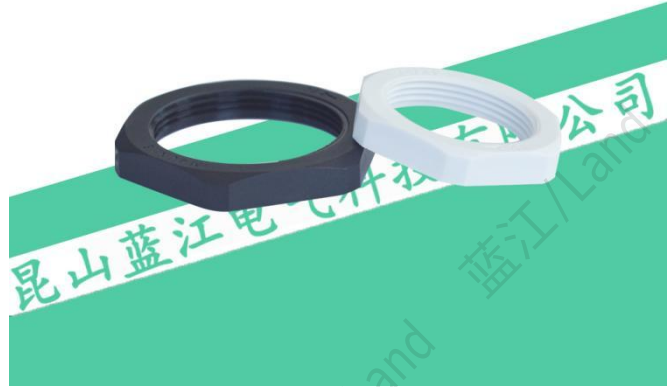

Material: Nylon

Color: Black, Grey White

environment protection ROHS

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A1	厚度 A2	packing
PN. (B黑 G浅灰)	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12B(G)	M12×1.5	19	5	100
L-M16B(G)	M16×1.5	22	5	100
L-M18B(G)	M18×1.5	24	5	100
L-M20B(G)	M20×1.5	27	6	100
L-M22B(G)	M22×1.5	30	6	100
L-M24B(G)	M24×1.5	30	6	100
L-M25B(G)	M25×1.5	32	6	100
L-M27B(G)	M27×1.5	36	7	100
L-M30B(G)	M30×1.5	36	7	100
L-M32B(G)	M32×1.5	40	7	50
L-M33B(G)	M33×2.0	40	7	50
L-M36B(G)	M36×1.5	45	7	50
L-M40B(G)	M40×1.5	49	8	50
L-M42B(G)	M42×2.0	53	8	50
L-M48B(G)	M48×2.0	60	8	50
L-M50B(G)	M50×1.5	60	8	50
L-M56B(G)	M56×2.0	65	8	50
L-M63B(G)	M63×1.5	75	8	20
L-M64B(G)	M64×1.5	75	8	20
L-PG7B(G)	PG7	19	5	100
L-PG9B(G)	PG9	22	5	100
L-PG11B(G)	PG11	24	5	100
L-PG13.5B(G)	PG13.5	27	6	100
L-PG16B(G)	PG16	30	6	100
L-PG21B(G)	PG21	36	7	100
L-PG29B(G)	PG29	45	7	100
L-PG36B(G)	PG36	60	8	50
L-PG42B(G)	PG42	65	8	50
L-PG48B(G)	PG48	70	8	20
L-G1/4B(G)	G1/4	19	5	100
L-G3/8B(G)	G3/8	24	5	100
L-G1/2B(G)	G1/2	27	6	100
L-G3/4B(G)	G3/4	36	7	100
L-G1B(G)	G1	45	7	100
L-G1-1/4B(G)	G1-1/4	60	8	50
L-G1-1/2B(G)	G1-1/2	65	8	50
L-G2B(G)	G2	70	8	20

铝制锁紧螺母

Aluminium locking nut





材料：6061铝

颜色：银色

性能：轻量化设计，表面处理耐腐蚀

作用：为格兰头，闷盖等与设备连接提供锁紧支持

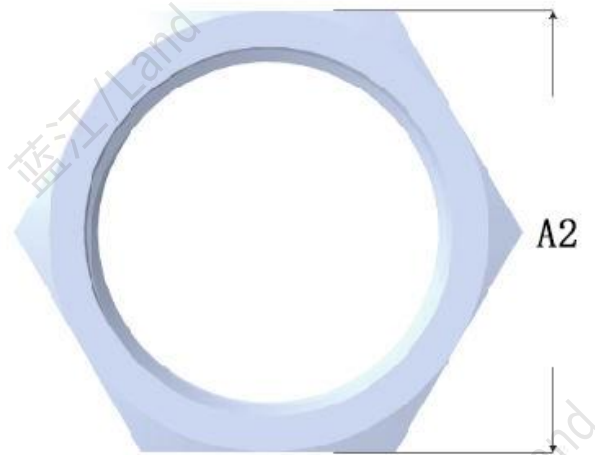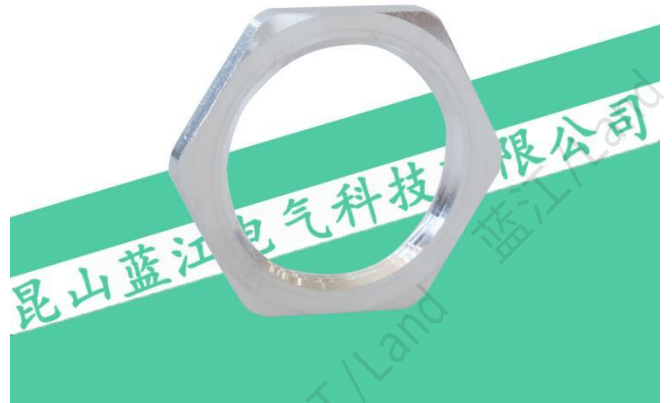

Material: 6061 aluminum

Color: Silver

Performance: Lightweight design, corrosion-resistant surface treatment

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12-AL	M12×1.5	15	3	100
L-M16-AL	M16×1.5	20	3.5	100
L-M18-AL	M18×1.5	21	3.5	100
L-M20-AL	M20×1.5	24	3.5	100
L-M22-AL	M22×1.5	26	3.5	100
L-M24-AL	M24×1.5	28	3.5	100
L-M25-AL	M25×1.5	30	4	100
L-M27-AL	M27×1.5	30	4	100
L-M30-AL	M30×1.5	34	4	100
L-M32-AL	M32×1.5	38	5	50
L-M33-AL	M33×2.0	38	5	50
L-M36-AL	M36×1.5	42	5	50
L-M40-AL	M40×1.5	46	5	50
L-M42-AL	M42×2.0	48	5	50
L-M48-AL	M48×2.0	58	5	50
L-M50-AL	M50×1.5	58	5	50
L-M63-AL	M63×1.5	71	6	20
L-M64-AL	M64×1.5	71	6	20
L-PG7-AL	PG7	15	3	100
L-PG9-AL	PG9	17	3	100
L-PG11-AL	PG11	22	3.5	100
L-PG13.5-AL	PG13.5	24	3.5	100
L-PG16-AL	PG16	26	3.5	100
L-PG21-AL	PG21	32	4	100
L-PG29-AL	PG29	40	5	100
L-PG36-AL	PG36	58	5.5	50
L-PG42-AL	PG42	60	6	50
L-PG48-AL	PG48	71	6	20
L-G1/4-AL	G1/4	15	3	100
L-G3/8-AL	G3/8	22	3.5	100
L-G1/2-AL	G1/2	24	3.5	100
L-G3/4-AL	G3/4	30	4	100
L-G1-AL	G1	38	5	100
L-G1-1/4-AL	G1-1/4	48	5	50
L-G1-1/2-AL	G1-1/2	55	5.5	50
L-G2-AL	G2	71	6	20

铜镀镍屏蔽螺母

Copper nickel plated locking nut

材料：黄铜镀镍

性能：带齿屏蔽特性

作用：为格兰头，闷盖等与设备连接提供锁紧支持，具有一定的屏蔽作用



Material: Nickel plated brass

Performance: Toothed shielding characteristics

Function: Provide locking support for connecting gland heads, covers, and other devices, and have a certain shielding effect

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
EC-L-M12	M12×1.5	15	3.8	100
EC-L-M16	M16×1.5	19	3.8	100
EC-L-M20	M20×1.5	23	4	100
EC-L-M25	M25×1.5	30	4.5	100
EC-L-M32	M32×1.5	36	5	50
EC-L-M40	M40×1.5	45	6	50
EC-L-M50	M50×1.5	55	6	50
EC-L-M63	M63×1.5	70	7	20